



XGB

Programmable Logic Controller

Programmable Logic Controller


XGB



All-In-One PLC With Next Generation Technology

XGB is a micro PLC that offers maximum performance at minimum cost. With its high functionality, XGB supports from simple control system to complex task. Strengthening its communication functions, XGB offers user-oriented integrated control. Based on its strengths, XGB can be used in many application fields.



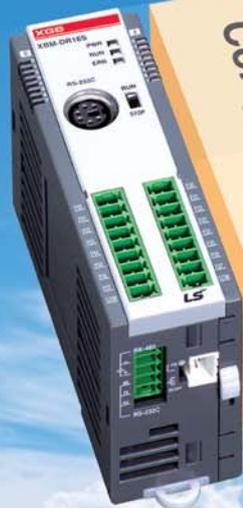

Compactness

High Performance

Convenience

Functionality

ALL-IN-ONE PLC



Contents

● Features	4
● General specifications	6
● Performance specifications	8
● Input/output specification	12
● Wiring	16
● Built-in functions	28
● Expansion	35
● DC Input	35
● Transistor Output	37
● Relay Output	39
● DC Input / Relay Output	40
● Analog Input	41
● Analog Output	42
● Analog Input / Output	43
● RTD	44
● Thermocouple	45
● Positioning module	46
● High Speed counter module	47
● Modular type	48
● Communication module	49
● Option modules/Smart link	51
● Software	52
● Product list	53
● Dimension	56

XGB Features



It's Slim


(Unit: mm)

	Item	W	H	D
XBM	DR/DN16S (16pt)	30	90	60
	DN32S (32pt)			
XBC/XEC	DR/DN32H (32pt)	114	90	64
	DR/DN64H (64pt)			
Expansion	Relay output/Ethernet	27	90	60
	Others			

Block type unit


XBC/XEC (High performance type)

- 83ns/step processing speed
- Max. 10 expansion modules, Max. 384 I/O points control
- Max. 5-Ch Communication with built-in functions and expansion modules

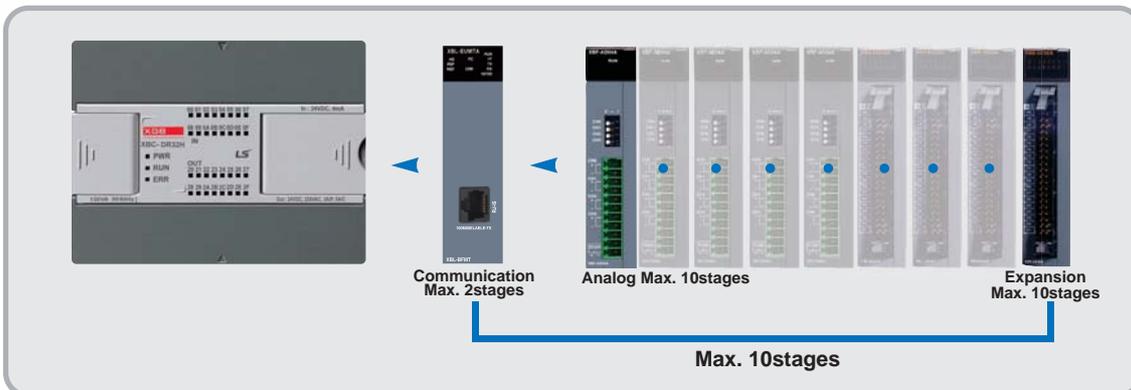

XBC/XEC (Standard type)

- 94ns/step processing speed
- Max. 7 expansion modules, Max. 2 option modules, Max. 254 I/O points control
- Max. 5-Ch Communication with built-in functions and expansion modules

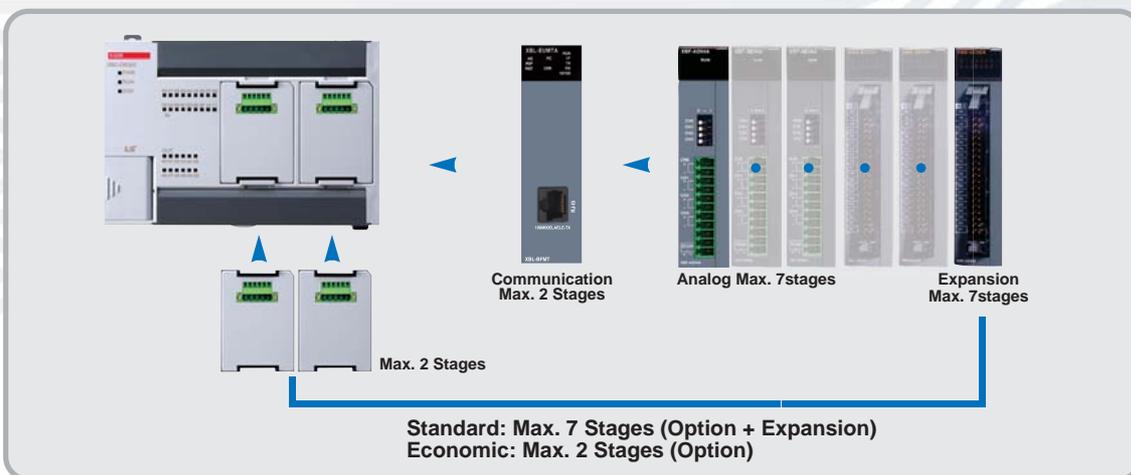



High performance


With its high-speed processing and system capability, XGB offers utmost efficiency for your applications.

XBC/XEC (Economic type)

- 240ns/step processing speed
- Max. 2 option modules, Max. 38 I/O points control
- 2-Ch built-in communication functions (RS-232C/RS485)



Max. 2 Stages



Option modules

XBO-M2MB	Memory
XBO-RTCA	RTC(Real Time Clock), Battery
XBO-DC04A	DC 24V, Input 4 points
XBO-TN04A	Transistor(Sink), Output 4 point
XBO-RD01A	RTD(Resistance Temperature Detect, Input 1CH)
XBO-AD02A	Voltage/Current, Input 2 CHs
XBO-DA02A	Voltage/Current, Output 2 CHs
XBO-AH02A	Voltage/Current, Input 1 CH
	Voltage/Current, Output 1 CH
XBO-TC02A	TC(Thermocouple), Input 2 CHs

Modular type unit

XBM (Standard type)

- 160ns/step processing speed
- Max. 7 expansion modules, Max. 256 I/O points control
- Max. 5-Ch Communication with built-in functions and expansion modules



Communication
Max. 2stages



Analog Max. 7stages



Expansion
Max. 7stages

Max. 7stages

XGB General specifications

Block type unit

(High performance,
Standard, Economic)



Item	Descriptions			Standard	
Ambient temperature	0 ~ 55 °C				
Storage temperature	-25 ~ +70 °C				
Ambient humidity	5 ~ 95%RH (Non-condensing)				
Storage humidity	5 ~ 95%RH (Non-condensing)				
Vibration resistance	Occasional vibration			10 times each direction (X, Y and Z)	IEC61131-2
	Frequency	Acceleration	Pulse width		
	10 ≤ f < 57Hz	-	0.075mm		
	57 ≤ f ≤ 150Hz	9.8m/s ² (1G)	-		
	Continuous vibration				
	Frequency	Acceleration	Pulse width		
10 ≤ f < 57Hz	-	0.035mm			
57 ≤ f ≤ 150Hz	4.9m/s ² (0.5G)	-			
Shock resistance	<ul style="list-style-type: none"> • Peak Acceleration: 147m/s² (15g) • Duration: 11ms • Pulse waveform: Half-sine, 3times each direction per each axis 			IEC61131-2	
Noise resistance	Square wave impulse noise	±500 V		LSIS Standard	
	Electrostatic discharge	4kV		IEC61131-2 IEC61000-4-2	
	Radiated electromagnetic field noise	80 ~ 1000MHz, 10V/m		IEC61131-2 IEC61000-4-3	
	Fast transient/ Burst noise	Main unit	Expansion module	IEC61131-2	
2kV		1kV	IEC61000-4-4		
Operating Ambience	Free from corrosive gases and excessive dust				
Altitude	Up to 2,000m				
Pollution level ^{*1)}	Less than 2				
Cooling	Air-cooling				

^{*1)} Pollution level indicates the degree to which conductive material is generated in the environment where the equipment is used. Pollution level 2 is the condition that only non-conductive pollution occurred but temporary conductivity may be produced due to condensing.

Modular type unit

(XBM-DR16S, DN16S, DN32S)



Item	Descriptions			Standard	
Ambient temperature	0 ~ 55 °C				
Storage temperature	-25 ~ +70 °C				
Ambient humidity	5 ~ 95%RH (Non-condensing)				
Storage humidity	5 ~ 95%RH (Non-condensing)				
Vibration resistance	Occasional vibration			10 times each direction (X, Y and Z)	IEC61131-2
	Frequency	Acceleration	Pulse width		
	10 ≤ f < 57Hz	-	0.075mm		
	57 ≤ f ≤ 150Hz	9.8m/s ² (1G)	-		
	Continuous vibration				
	Frequency	Acceleration	Pulse width		
10 ≤ f < 57Hz	-	0.035mm			
57 ≤ f ≤ 150Hz	4.9m/s ² (0.5G)	-			
Shock resistance	<ul style="list-style-type: none"> • Peak Acceleration: 147m/s² (15g) • Duration: 11ms • Pulse waveform: Half-sine, 3times each direction per each axis 			IEC61131-2	
Noise resistance	Square wave impulse noise	±500 V		LSIS Standard	
	Electrostatic discharge	4kV		IEC61131-2 IEC61000-4-2	
	Radiated electromagnetic field noise	80 ~ 1000MHz, 10V/m		IEC61131-2 IEC61000-4-3	
	Fast transient/ Burst noise	Main unit	Expansion module	IEC61131-2	
2kV		1kV	IEC61000-4-4		
Operating Ambience	Free from corrosive gases and excessive dust				
Altitude	Up to 2,000m				
Pollution level ^{*1)}	Less than 2				
Cooling	Air-cooling				

^{*1)} Pollution level indicates the degree to which conductive material is generated in the environment where the equipment is used. Pollution level 2 is the condition that only non-conductive pollution occurred but temporary conductivity may be produced due to condensing.


Names and functions

Block type unit (High performance, Standard, Economic)



No.	Name	Descriptions	Descriptions	Remark
1	Input LED	Input indication	Red On: Input signal On Red Off: Input signal Off	
2	Condition LED	PWR: Power indication	Red On: Power On Red Off: Power Off	
		RUN: RUN indication	Green On: PLC Run Green Off: PLC Stop	
		ERR: Error indication	Red On-and-Off: PLC Error Red Off: PLC Normal condition	
3	Output LED	Output LED	On: Output signal On Off: Output signal Off	
4	Expansion module connector	Expansion module connector	Connection of expansion module (I/O, Special function, Communication)	
5	PADT connector	PADT connection	Connector for XG5000 / XG-PD connection	
6	Mode switch	Mode setting	Setting Run/Stop mode of PLC	
7	Input Terminal block	Input wiring connection	-	
8	Output Terminal block	Output wiring connection	-	
9	Built-in RS-485 connector	Built-in RS-485 connection	RS-485 + /-terminal connection	
10	Built-in RS-232C connector	Built-in RS-232C connection	RS-232C Tx/D, Rx/D, SG terminal connection	
11	Power terminal	Power supply terminal	AC 110-220V power supply	
12	Option module slot	Slot for option module	-	

Modular type unit (XBM-DR16S, DN16S, DN32S)

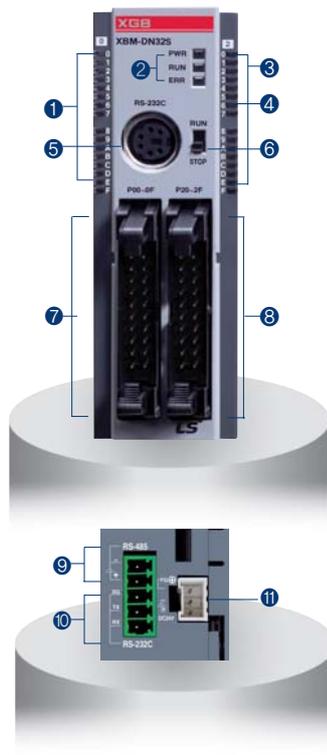

No.	Name	Descriptions	Descriptions	Remark
1	Input LED	Input indication	Red On: Input signal On Red Off: Input signal Off	
2	Condition LED	PWR: Power indication	Red On: Power On Red Off: Power Off	
		RUN: RUN indication	Green On: PLC Run Green Off: PLC Stop	
		ERR: Error indication	Red On-and-Off: PLC Error Red Off: PLC Normal condition	
3	Output LED	Output LED	On: Output signal On Off: Output signal Off	
4	Expansion module connector	Expansion module connector	Connection of expansion module (I/O, Special function, Communication)	
5	PADT connector	PADT connection	Connector for XG5000 / XG-PD connection	
6	Mode switch	Mode setting	Setting Run/ Stop mode of PLC	
7	Input connector / Terminal block	Input wiring connection	-	
8	Output connector / Terminal block	Output wiring connection	-	
9	Built-in RS-485 connector	Built-in RS-485 connection	RS-485 + /-terminal connection	
10	Built-in RS-232C connector	Built-in RS-232C connection	RS-232C Tx/D, Rx/D, SG terminal connection	
11	Power connector	Power supply connection	DC 24V power supply	

High performance type

Performance specifications

Item	XBC-DR32H	XBC-DN32H	XBC-DR64H	XBC-DN64H
	XEC-DR32H ^{*1)}	XEC-DN32H ^{*1)}	XEC-DR64H ^{*1)}	XEC-DN64H ^{*1)}
	XBC-DR32H/DC			
	XBC-DN32H/DC			
	XBC-DR64H/DC			
	XBC-DN64H/DC			
Control method	Repetitive, cyclic, interrupt, constant scan			
I/O control method	Refresh mode (Batch processing by scan synchronization), Direct mode by instruction			
Programming language	Ladder diagram or IEC standard (LD, SFC, ST) ^{*1)}			
Processing speed	83 ns/Step			
Program capacity	15Kstep (IEC type: 200KB)			
Main Unit I/O points	32 (Input:16, Output:16)	32 (Input:16, Output:16)	64 (Input: 32, Output: 32)	64 (Input: 32, Output: 32)
Max. I/O points (Main + Expansion 10 stages)	352 points		384 points	
Total program	128			
Operation mode	RUN, STOP, DEBUG			
Self diagnosis	Detects errors of scan time, memory error, I/O error, battery error, power error, etc.			
Program port	USB (Rev 1.1), RS-232C 1 channel (Loader)			
Retain data at power failure	Latch area setting at Basic parameter			
Built-in functions	RS-232C / RS-485(2CH), Pulse catch, Input filter, External interrupt, PID control, High-speed counter, Positioning, RTC			
Internal current consumption	660mA	260mA	1040mA	330mA
Weight	600g	500g	900g	800g
Rated voltage	AC 100 ~ 240V or DC24V			
Data memory				
XBC		XEC (IEC type)		
P	P0000 ~ P1023F (16,384 points)	Symbolic variable	A	32KB (Max. 16KB retain setting available)
M	M0000 ~ M1023F (16,384 points)	Input variable	I	2KB (%IX 15.15.63)
K	K0000 ~ K4095F (65,536 points)	Output variable	Q	2KB (%QX 15.15.63)
L	L0000 ~ L2047F (32,768 points)	Direct variable	M	16KB (Max. 8KB retain setting available)
F	F0000 ~ F1023F (16,384 points)		R	20KB (1 block)
T	100ms, 10ms, 1ms: T0000 ~ T1023 (1,024)(Adjustable by parameter setting)		W	20KB
C	C0000 ~ C1023 (1,024)	Flag variable	F	2KB
S	S00.00 ~ S127.99		K	8KB
D	D0000 ~ D10239 (10,240 word)		L	4KB
U	U00.00 ~ U0A.31 (Analog data refresh area: 352 word)		N	10KB
Z	Z000 ~ Z127 (128 word)		U	1KB
N	N000 ~ N5119 (5,120 word)	Flash area	R	20KB (2 blocks)

^{*1)} XEC is IEC standard language programming.

Standard type

Performance specifications

Item	XBC-DN20SU	XBC-DN30SU	XBC-DN40SU	XBC-DN60SU		
	XBC-DR20SU	XBC-DR30SU	XBC-DR40SU	XBC-DR60SU		
	XEC-DN20SU	XEC-DN30SU	XEC-DN40SU	XEC-DN60SU		
	XEC-DR20SU	XEC-DR30SU	XEC-DR40SU	XEC-DR60SU		
Control method	Repetitive, cyclic, interrupt, constant scan					
I/O control method	Refresh mode (Batch processing by scan synchronization), Direct mode by instruction					
Programming language	Ladder diagram, Instruction List					
Processing speed	94 ns/Step					
Program capacity	15Kstep					
Main Unit I/O points	20 (Input:12, Output:8)	30 (Input:18, Output:12)	40 (Input:24, Output:16)	60 (Input:36, Output:24)		
Max. I/O points (Main + Expansion 7 stages)	244 points	254 points	264 points	284 points		
Total program	128					
Operation mode	RUN, STOP, DEBUG					
Self diagnosis	Detects errors of scan time, memory error, I/O error, battery error, power error, etc.					
Program port	RS-232C 1 channel (Loader), USB 1 channel (U-type model)					
Retain data at power failure	Latch area setting at Basic parameter					
Built-in functions	RS-232C / RS-485(2CH), Pulse catch, Input filter, External interrupt, PID control, High-speed counter, Positioning					
Internal current consumption	253mA	294mA	288mA	340mA		
	460mA	612mA	684mA	942mA		
	252mA	270mA	288mA	340mA		
	478mA	626mA	684mA	942mA		
Weight	475g	474g	578g	636g		
	514g	528g	594g	804g		
	475g	474g	578g	636g		
	514g	528g	594g	804g		
Rated voltage	AC 100 ~ 240V					
Data memory						
XBC			XEC			
Data area	P	P0000 ~ P1023F (16,384 points)	Symbolic variable	A	16KB (Max. 16KB retain setting available)	
	M	M0000 ~ M1023F (16,384 points)		Input variable	I	2KB(%IX 15.15.63)
	K	K0000 ~ K4095F (65,536 points)	Output variable		Q	2KB(%QX 15.15.63)
	L	L0000 ~ L2047F (32,768 points)		Direct variable	M	8KB (Max. retain setting available)
	F	F0000 ~ F1023F (16,384 points)	R		20KB (1block)	
	T	100ms, 10ms, 1ms: T0000 ~ T1023 (1,024) (Adjustable by parameter setting)	Flag variable		W	20KB
	C	C0000 ~ C1023 (1,024)			F	2KB
	S	S00.00 ~ S127.99		K	8KB	
	D	D0000 ~ D10239 (10,240 word)		L	4KB	
	U	U00.00 ~ U0A.31 (Analog data refresh area: 352 word)	U	1KB		
	Z	Z000 ~ Z127 (128 word)	Flash area		20KB (2block)	
	R	N0000 ~ N10236 (10,240 word)				

*Some products are due in market soon.

Economic type

Performance specifications

Item	XBC-DR10E	XBC-DR14E	XBC-DR20E	XBC-DR30E
Control method	Repetitive, cyclic, fixed cycle operation, constant scan			
I/O control method	Refresh mode (Batch processing by scan synchronization), Direct mode by instruction			
Programming language	Ladder diagram, Instruction List			
Processing speed	240 ns/Step			
Program capacity	4Kstep			
Main Unit I/O points	10 (Input:6, Output:4)	14 (Input:8, Output:6)	20 (Input:12, Output:8)	30 (Input:18, Output:12)
Max. I/O points	14 (Main + 1 option)	18 (Main + 1 option)	28 (Main + 2 options)	38 (Main + 2 options)
Total program	128			
Operation mode	RUN, STOP, DEBUG			
Self diagnosis	Detects errors of scan time, memory error, I/O error, battery error, power error, etc.			
Program port	RS-232C 1 channel (Loader)			
Retain data at power failure	Latch area setting at Basic parameter			
Built-in functions	RS-232C or RS-485(1CH), Pulse catch, Input filter, External interrupt, High-speed counter			
Internal current consumption	250mA	315mA	355mA	485mA
Weight	330g	340g	450g	465g
Rated voltage	AC 100 ~ 240V			
Data memory				
XBC				
Data area	P	P0000 ~ P127F (2,048 points)		
	M	M0000 ~ M255F (4,096 points)		
	K	K0000 ~ K2559F (Special area: K2600~K2559F) (40,960 points)		
	L	L0000 ~ L1279F (20,480 points)		
	F	F000 ~ F255F (4,096 points)		
	T	100ms, 10ms, 1ms: T000 ~ T255 (256) (Adjustable by parameter setting)		
	C	C000 ~ C255 (256)		
	S	S00.00 ~ S127.99		
	D	D0000 ~ D5119 (5120 word)		
	U	U00.00 ~ U07.31 (Analog data refresh area: 256 word)		
Z	Z000 ~ Z127 (128 word)			



Standard type

Performance specifications

Item	XBM-DR16S	XBM-DN16S	XBM-DN32S
Control method	Repetitive, cyclic, fixed cycle operation, constant scan		
I/O control method	Refresh mode (Batch processing by scan synchronization), Direct mode by instruction		
Programming language	Ladder diagram, Instruction List		
Processing speed	160 ns/Step		
Program capacity	10Kstep		
Main Unit I/O points	16 points (Input:8, Output:8)	16 points (Input:8, Output:8)	32 points (Input:16, Output:16)
Max. I/O points (Main + Expansion 7 stages)	240 points		256 points
Total program	128		
Operation mode	RUN, STOP, DEBUG		
Self diagnosis	Detects errors of scan time, memory error, I/O error, battery error, power error, etc.		
Program port	RS-232C 1 channel (Loader)		
Retain data at power failure	Latch area setting at Basic parameter		
Built-in functions	RS-232C/RS-485(2CH), Pulse catch, Input filter, External interrupt, PID control, High-speed counter, Positioning ^{*1)}		
Internal current consumption	400mA	250mA	280mA
Weight	140g	100g	100g
Rated voltage	DC24V		
Data memory			
XBM			
Data area	P	P0000 ~ P127F (2,048 points)	
	M	M0000 ~ M255F (4,096 points)	
	K	K0000 ~ K2559F (Special area: K2600~K2559F) (40,960 points)	
	L	L0000 ~ L1279F (20,480 points)	
	F	F000 ~ F255F (4,096 points)	
	T	100ms, 10ms, 1ms: T000 ~ T255 (256) (Adjustable by parameter setting)	
	C	C000 ~ C255 (256)	
	S	S00.00 ~ S127.99	
	D	D0000 ~ D5119 (5120 word)	
	U	U00.00 ~ U07.31 (Analog data refresh area: 256 word)	
	Z	Z000 ~ Z127 (128 word)	
	N	N0000 ~ N3935 (3,936 word)	

*1) XBM-DR16S does not have built-in Positioning function.



High performance type

Input specification

Item	XBC-DR32H	XBC-DN32H	XBC-DR64H	XBC-DN64H	XEC-R32H/D1
	XEC-DR32H	XEC-DN32H	XEC-DR64H	XEC-DN64H	XEC-R64H/D1
Input points	16 points		32 points		16 points
Rated input voltage	DC 24V				DC 12/24V
Rated input current	4mA (Contact 0~7: 9mA)				5/10mA(Contact0~7 : 7/15mA)
Operation voltage range	DC 20.4 ~ 28.8V (Ripple rate < 5%)				DC 9.5~30V(Ripple rate<5%)
On voltage / On current	DC 19V or more / 3mA or more				DC 9V or more / 3mA or more
Off voltage / Off current	DC 6V or less / 1mA or less				DC 5V or less / 1mA or less
Input resistance	5.6kΩ (P00 ~ P07: 2.7kΩ)				2.7kΩ (%IX0.0.0-%IX0.0.7:1.8kΩ)
Response time	Off → On	1 / 3 / 5 / 10 / 20 / 70 / 100 ms (Setting by CPU parameter) Initial value: 3ms			
	On → Off				
Weight	600g	500g	900g	800g	600g

Relay output specification

Item	XBC-DR32H/XEC-DR32H		XBC-DR64H/XEC-DR64H	
	Output point	16 points		32 points
Insulation method	Relay insulation			
Rated load voltage / current	DC 24V 2A (Resistive load) / AC 220V 2A (COSϕ = 1), 5A / COM			
Min. load voltage / current	DC 5V / 1mA			
Max. load voltage	AC 250V, DC 125V			
Off leakage current	0.1mA (AC 220V, 60Hz)			
Max. On / Off frequency	3,600 times / hr			
Service life	Mechanical	20millions times or more		
		Rated load voltage / current 100,000 times or more		
	Electrical	AC 200V / 1.5A, AC 240V / 1A (COSϕ = 0.7) 100,000 times or more		
		AC 200V / 1A, AC 240V / 0.5A (COSϕ = 0.35) 100,000 times or more DC 24V / 1A, DC 100V / 0.1A (L / R = 7ms) 100,000 times or more		
Response time	Off → On	10ms or less		
	On → Off	12ms or less		
Common method	4 points / COM		P20 ~ 2F: 4 points / COM P30 ~ 3F: 8 points / COM	

Transistor output specification

Item	XBC-DN32H/XEC-DN32H		XBC-DN64H/XEC-DN64H	
	Output point	16 points		32 points
Insulation method	Photo coupler insulation			
Rated load voltage	DC 12 / 24V			
Load voltage range	DC 10.2 ~ 26.4 V			
Max. load voltage	0.5A / 1point (P 20 ~ 23: 0.1A / point)			
Off leakage current	0.1mA or less			
Max. inrush current	4A / 10ms or less			
Max. voltage drop (On)	DC 0.4V or less			
Surge absorber	Zener Diode			
Response time	Off → On	1ms or less		
	On → Off	1ms or less (Rated load, resistive load)		
Common method	4 points / com		P20 ~ 2F: 4 points / COM P30 ~ 3F: 8 points / COM	
External power supply	Voltage	DC 12 / 24V ± 10% (ripple voltage 4 Vp-p or less)		
	Current	10mA or less (DC 24V connection)		

Standard type

Input specification

Item	XBC-DN20SU XBC-DR20SU	XBC-DN30SU XBC-DR30SU	XBC-DN40SU XBC-DR40SU	XBC-DN60SU XBC-DR60SU
Input point	12 points	18 points	24 points	36 points
Rated input voltage	DC24V			
Rated input current	4mA(Contact point 0~1 : 16mA, 2~7 : 10mA), DN20SU(DN30SU) : 4mA(Contact point 0~7: 10mA)			
Operation voltage range	DC 20.4 ~ 28.8V (Ripple rate<5%)			
On voltage / On current	DC 19V or more / 3mA or more			
Off voltage / Off current	DC 6V or less / 1mA or less			
Input resistance	5.6k Ω (P00 ~ P07 : 2.7k Ω)			
Response time	Off \rightarrow On	1 / 3 / 5 / 10 / 20 / 70 / 100ms (Setting by CPU parameter) Initial value : 3ms		
	On \rightarrow Off			

Transistor output specification

Item	XBC-DN20SU	XBC-DN30SU	XBC-DN40SU	XBC-DN60SU
Output point	8 points	12 points	16 points	24 points
Insulation method	Photo coupler insulation			
Rated load voltage	DC 12/24V			
Load voltage range	DC 10.2 ~ 26.4V			
Max. load voltage	0.5A / 1 point, 2A / 1COM			
Off leakage current	0.1mA or less			
Max. inrush current	4A / 10ms or less			
Max voltage drop(on)	DC 0.4V or less			
Surge absorber	Zener Diode			
Response time	Off \rightarrow On	DC 12 / 24V \pm 10%(ripple voltage 4Vp-p or less)		
	On \rightarrow Off			

Relay output specification

Item	XBC-DR20SU	XBC-DR30SU	XBC-DR40SU	XBC-DR60SU
Output point	8 points	12 points	16 points	24 points
Insulation method	Relay insulation			
Rated load voltage/current	DC 24V 2A / AC220V 2A(COS ϕ = 1), 5A/COM			
Min. load voltage/current	DC5V / 1mA			
Max. load Current	AC 250V, DC 125V			
Off leakage current	0.1mA(AC220V, 60Hz)			
Surge absorber	-			
Response time	Off \rightarrow On	10ms or less		
	On \rightarrow Off			
Common method(/COM)	4 points / COM (P40, P41 : 1point/COM), (P42 P43 : 2 Points/COM)			
Life-cycle	Mechanical	Rated load voltage / current 10 million times or more		
	Electrical	AC220V / 1.5A, AC240V / 1A (COS ϕ = 0.7) 10 million times or more		
		AC200V / 1A, AC240V / 0.5A (COS ϕ = 0.35) 10 million times or more		
		DC24V / 1A, DC100V/ 0.1A (L / R = 7ms) 10 million times or more		

Economic type

Input specification

Item	XBC-DR10E	XBC-DR14E	XBC-DR20E	XBC-DR30E
Input point	10 points	14 points	20 points	30 points
Rated input voltage	DC 24V			
Rated input current	4mA (Contact point 0 ~ 3: 7mA)			
Operation voltage range	DC 20.4 ~ 28.8V (Ripple rate < 5%)			
On voltage / On current	DC 19V or more / 3mA or more			
Off voltage / Off current	DC 6V or less / 1mA or less			
Input resistance	5.6kΩ (P00 ~ P07: 2.7kΩ)			
Response time	Off → On	1 / 3 / 5 / 10 / 20 / 70 / 100 ms (set by I/O parameter) Initial value: 3ms		
	On → Off			
Weight	330g	340g	450g	465g

Relay output specification

Item	XBC-DR10E	XBC-DR14E	XBC-DR20E	XBC-DR30E
Input point	10 points	14 points	20 points	30 points
Insulation method	Relay insulation			
Rated load voltage / current	DC 24V 2A (Resistive load) / AC 220V 2A (COS ϕ = 1), 5A / COM			
Min. load voltage / current	DC 5V / 1mA			
Max. load voltage	AC 250V, DC 125V			
Off leakage current	0.1mA (AC 220V, 60Hz)			
Max. On / Off frequency	3,600 times / hr			
Service life	Mechanical	20 millions times or more		
	Electrical	Rated load voltage / current 100,000 times or more		
		AC 200V / 1.5A, AC 240V / 1A (COS ϕ = 0.7) 100,000 times or more		
		AC 200V / 1A, AC 240V / 0.5A (COS ϕ = 0.35) 100,000 times or more		
Response time	Off → On	10ms or less		
	On → Off	12ms or less		
Common method	2 points / com	4 points / com	COM0 ~ COM8: 4 points / COM COM4 ~ COM5: 8 points / COM	

Standard type

Input specification

Item	XBM-DR16S	XBM-DN16S	XBM-DN32S
Input point	8 points	8 points	16 points
Rated input voltage	DC24 V		
Rated input current	4mA (00 ~ 03: 7mA)		
Operation voltage range	DC20.4 ~ 28.8V (ripple rate < 5%)		
Response time	1 / 3 / 5 / 10 / 20 / 70 / 100ms		
	(set by CPU parameter) Default: 3ms		
Common Method	8 points / COM		16 points / COM

Relay output specification

Item	XBM-DR16S	
Output point	8 points	
Insulation method	Relay insulation	
Rated load voltage / current	DC 24V 2A (Resistive load) / AC 220V 2A (COS ϕ = 1), 5A / COM	
Min. load voltage / current	DC 5V / 1mA	
Max. load voltage	AC 250V, DC 125V	
Off leakage current	0.1mA (AC 220V, 60Hz)	
Max. On / Off frequency	3,600 times / hr	
Service life	Mechanical	20millions times or more
	Electrical	Rated load voltage / current 100,000 times or more
		AC 200V / 1.5A, AC 240V / 1A (COS ϕ = 0.7) 100,000 times or more
		AC 200V / 1A, AC 240V / 0.5A (COS ϕ = 0.35) 100,000 times or more
	DC 24V / 1A, DC 100V / 0.1A (L / R = 7ms) 100,000 times or more	
Response time	Off \rightarrow On	10ms or less
	On \rightarrow Off	12ms or less
Common method	8 points / COM	

Transistor output specification

Item	XBM-DN16S	XBM-DN32S
Output point	8 point	16 point
Insulation method	Photo coupler insulation	
Rated load voltage	DC 12/24V	
Load voltage range	DC 10.2 ~ 26.4 V	
Max. load voltage	0.2A / 1 point (P 20 ~ 23: 0.1A / Point)	
Max. inrush current	4A / 10ms or less	
Max. voltage drop (On)	DC 0.4V or less	
Response time	1ms or less	
	1ms or less (Rated load, resistive load)	
Common method	8 point / COM	16 point / COM
External power supply	DC 12 / 24V \pm 10% (ripple voltage 4 Vp-p or less)	
	25mA or less (DC 24V connection)	
External connection method	20pin connector	

High performance type (H-Type 32 points unit)

Input wiring

(XBC-DR32H / XBC-DN32H
XEC-DR32H / XEC-DN32H)

Circuit configuration		No.	Contact	No.	Contact	Type																																																											
	TB2	485+	TB1	RX	<table border="1"> <tr><td>485 +</td><td>RX</td><td>TB1</td></tr> <tr><td>485 -</td><td>TX</td><td>TB3</td></tr> <tr><td>P00</td><td>SG</td><td>TB5</td></tr> <tr><td>P01</td><td>P01</td><td>TB7</td></tr> <tr><td>P02</td><td>P02</td><td>TB9</td></tr> <tr><td>P03</td><td>P03</td><td>TB11</td></tr> <tr><td>P04</td><td>P04</td><td>TB13</td></tr> <tr><td>P05</td><td>P05</td><td>TB15</td></tr> <tr><td>P06</td><td>P06</td><td>TB17</td></tr> <tr><td>P07</td><td>P07</td><td>TB19</td></tr> <tr><td>P08</td><td>P08</td><td>TB21</td></tr> <tr><td>P09</td><td>P09</td><td>TB23</td></tr> <tr><td>P0A</td><td>P0A</td><td>TB24</td></tr> <tr><td>P0B</td><td>P0B</td><td></td></tr> <tr><td>P0C</td><td>P0C</td><td></td></tr> <tr><td>P0D</td><td>P0D</td><td></td></tr> <tr><td>P0E</td><td>P0E</td><td></td></tr> <tr><td>P0F</td><td>P0F</td><td></td></tr> <tr><td>COM</td><td>COM</td><td></td></tr> <tr><td>24V</td><td>24V</td><td></td></tr> </table>	485 +	RX	TB1	485 -	TX	TB3	P00	SG	TB5	P01	P01	TB7	P02	P02	TB9	P03	P03	TB11	P04	P04	TB13	P05	P05	TB15	P06	P06	TB17	P07	P07	TB19	P08	P08	TB21	P09	P09	TB23	P0A	P0A	TB24	P0B	P0B		P0C	P0C		P0D	P0D		P0E	P0E		P0F	P0F		COM	COM		24V	24V	
	485 +	RX	TB1																																																														
	485 -	TX	TB3																																																														
	P00	SG	TB5																																																														
	P01	P01	TB7																																																														
	P02	P02	TB9																																																														
	P03	P03	TB11																																																														
	P04	P04	TB13																																																														
	P05	P05	TB15																																																														
	P06	P06	TB17																																																														
	P07	P07	TB19																																																														
	P08	P08	TB21																																																														
	P09	P09	TB23																																																														
	P0A	P0A	TB24																																																														
	P0B	P0B																																																															
	P0C	P0C																																																															
P0D	P0D																																																																
P0E	P0E																																																																
P0F	P0F																																																																
COM	COM																																																																
24V	24V																																																																
TB4	485-	TB3	TX																																																														
TB6	00	TB5	SG																																																														
TB8	02	TB7	01																																																														
TB10	04	TB9	03																																																														
TB12	06	TB11	05																																																														
TB14	08	TB13	07																																																														
TB16	0A	TB15	09																																																														
TB18	0C	TB17	0B																																																														
TB20	0E	TB19	0D																																																														
TB22	COM	TB21	0F																																																														
TB24	24V	TB23	24G																																																														

Transistor output wiring

(XBC-DN32H / XEC-DN32H)

Circuit configuration		No.	Contact	No.	Contact	Type																																						
	TB2	FG	TB1	AC100	<table border="1"> <tr><td>FG</td><td>AC100 ~240Y</td><td>TB1</td></tr> <tr><td>P</td><td>P20</td><td>TB3</td></tr> <tr><td>P21</td><td>P21</td><td>TB5</td></tr> <tr><td>P22</td><td>P22</td><td>TB7</td></tr> <tr><td>P23</td><td>COM0</td><td>TB9</td></tr> <tr><td>P24</td><td>P25</td><td>TB11</td></tr> <tr><td>P26</td><td>P27</td><td>TB13</td></tr> <tr><td>COM1</td><td>P28</td><td>TB15</td></tr> <tr><td>P29</td><td>P2A</td><td>TB17</td></tr> <tr><td>P28</td><td>COM2</td><td>TB19</td></tr> <tr><td>P2C</td><td>P2D</td><td>TB21</td></tr> <tr><td>P2E</td><td>P2F</td><td>TB23</td></tr> <tr><td>COM3</td><td></td><td>TB24</td></tr> </table>	FG	AC100 ~240Y	TB1	P	P20	TB3	P21	P21	TB5	P22	P22	TB7	P23	COM0	TB9	P24	P25	TB11	P26	P27	TB13	COM1	P28	TB15	P29	P2A	TB17	P28	COM2	TB19	P2C	P2D	TB21	P2E	P2F	TB23	COM3		TB24
	FG	AC100 ~240Y	TB1																																									
	P	P20	TB3																																									
	P21	P21	TB5																																									
	P22	P22	TB7																																									
	P23	COM0	TB9																																									
	P24	P25	TB11																																									
	P26	P27	TB13																																									
	COM1	P28	TB15																																									
	P29	P2A	TB17																																									
	P28	COM2	TB19																																									
	P2C	P2D	TB21																																									
	P2E	P2F	TB23																																									
	COM3		TB24																																									
	TB4	DC12/24V	TB3	~240V																																								
	TB6	21	TB5	20																																								
TB8	23	TB7	22																																									
TB10	24	TB9	COM0																																									
TB12	26	TB11	25																																									
TB14	COM1	TB13	27																																									
TB16	29	TB15	28																																									
TB18	2B	TB17	2A																																									
TB20	2C	TB19	COM2																																									
TB22	2E	TB21	2D																																									
TB24	COM3	TB23	2F																																									

Relay output wiring

(XBC-DR32H / XEC-DR32H)

Circuit configuration		No.	Contact	No.	Contact	Type																																						
	TB2	FG	TB1	AC100	<table border="1"> <tr><td>FG</td><td>AC100 ~240Y</td><td>TB1</td></tr> <tr><td>NC</td><td>P20</td><td>TB3</td></tr> <tr><td>P21</td><td>P21</td><td>TB5</td></tr> <tr><td>P22</td><td>P22</td><td>TB7</td></tr> <tr><td>P23</td><td>COM0</td><td>TB9</td></tr> <tr><td>P24</td><td>P25</td><td>TB11</td></tr> <tr><td>P26</td><td>P27</td><td>TB13</td></tr> <tr><td>COM1</td><td>P28</td><td>TB15</td></tr> <tr><td>P29</td><td>P2A</td><td>TB17</td></tr> <tr><td>P28</td><td>COM2</td><td>TB19</td></tr> <tr><td>P2C</td><td>P2D</td><td>TB21</td></tr> <tr><td>P2E</td><td>P2F</td><td>TB23</td></tr> <tr><td>COM3</td><td></td><td>TB24</td></tr> </table>	FG	AC100 ~240Y	TB1	NC	P20	TB3	P21	P21	TB5	P22	P22	TB7	P23	COM0	TB9	P24	P25	TB11	P26	P27	TB13	COM1	P28	TB15	P29	P2A	TB17	P28	COM2	TB19	P2C	P2D	TB21	P2E	P2F	TB23	COM3		TB24
	FG	AC100 ~240Y	TB1																																									
	NC	P20	TB3																																									
	P21	P21	TB5																																									
	P22	P22	TB7																																									
	P23	COM0	TB9																																									
	P24	P25	TB11																																									
	P26	P27	TB13																																									
	COM1	P28	TB15																																									
	P29	P2A	TB17																																									
	P28	COM2	TB19																																									
	P2C	P2D	TB21																																									
	P2E	P2F	TB23																																									
	COM3		TB24																																									
	TB4	NC	TB3	~240V																																								
	TB6	21	TB5	20																																								
TB8	23	TB7	22																																									
TB10	24	TB9	COM0																																									
TB12	26	TB11	25																																									
TB14	COM1	TB13	27																																									
TB16	29	TB15	28																																									
TB18	2B	TB17	2A																																									
TB20	2C	TB19	COM2																																									
TB22	2E	TB21	2D																																									
TB24	COM3	TB23	2F																																									

High performance type (H-Type 64 points unit)

Input wiring

(XBC-DR64H / XBC-DN64H
XEC-DR64H / XEC-DN64H)

Circuit configuration		No.	Contact	No.	Contact	Type																																																																	
	TB2	485+	TB1	RX	<table border="1"> <tr><td>485 +</td><td>RX</td><td>TB1</td></tr> <tr><td>485 -</td><td>TX</td><td>TB3</td></tr> <tr><td>P00</td><td>SG</td><td>TB5</td></tr> <tr><td>P01</td><td>P01</td><td>TB7</td></tr> <tr><td>P02</td><td>P03</td><td>TB9</td></tr> <tr><td>P04</td><td>P05</td><td>TB11</td></tr> <tr><td>P06</td><td>P07</td><td>TB13</td></tr> <tr><td>P08</td><td>P09</td><td>TB15</td></tr> <tr><td>P0A</td><td>P0B</td><td>TB17</td></tr> <tr><td>P0C</td><td>P0D</td><td>TB19</td></tr> <tr><td>P0E</td><td>P0F</td><td>TB21</td></tr> <tr><td>COM0</td><td>NC</td><td>TB23</td></tr> <tr><td>P10</td><td>P11</td><td>TB25</td></tr> <tr><td>P12</td><td>P13</td><td>TB27</td></tr> <tr><td>P14</td><td>P15</td><td>TB29</td></tr> <tr><td>P16</td><td>P17</td><td>TB31</td></tr> <tr><td>P18</td><td>P19</td><td>TB33</td></tr> <tr><td>P0A</td><td>P0B</td><td>TB35</td></tr> <tr><td>P0C</td><td>P0D</td><td>TB37</td></tr> <tr><td>P0E</td><td>P0F</td><td>TB39</td></tr> <tr><td>COM1</td><td>24V</td><td>TB41</td></tr> <tr><td>24V</td><td></td><td>TB42</td></tr> </table>	485 +	RX	TB1	485 -	TX	TB3	P00	SG	TB5	P01	P01	TB7	P02	P03	TB9	P04	P05	TB11	P06	P07	TB13	P08	P09	TB15	P0A	P0B	TB17	P0C	P0D	TB19	P0E	P0F	TB21	COM0	NC	TB23	P10	P11	TB25	P12	P13	TB27	P14	P15	TB29	P16	P17	TB31	P18	P19	TB33	P0A	P0B	TB35	P0C	P0D	TB37	P0E	P0F	TB39	COM1	24V	TB41	24V		TB42
	485 +	RX	TB1																																																																				
	485 -	TX	TB3																																																																				
	P00	SG	TB5																																																																				
	P01	P01	TB7																																																																				
	P02	P03	TB9																																																																				
	P04	P05	TB11																																																																				
	P06	P07	TB13																																																																				
	P08	P09	TB15																																																																				
	P0A	P0B	TB17																																																																				
	P0C	P0D	TB19																																																																				
	P0E	P0F	TB21																																																																				
	COM0	NC	TB23																																																																				
	P10	P11	TB25																																																																				
	P12	P13	TB27																																																																				
	P14	P15	TB29																																																																				
	P16	P17	TB31																																																																				
	P18	P19	TB33																																																																				
	P0A	P0B	TB35																																																																				
	P0C	P0D	TB37																																																																				
	P0E	P0F	TB39																																																																				
	COM1	24V	TB41																																																																				
	24V		TB42																																																																				
	TB4	485-	TB3	TX																																																																			
TB6	00	TB5	SG																																																																				
TB8	02	TB7	01																																																																				
TB10	04	TB9	03																																																																				
TB12	06	TB11	05																																																																				
TB14	08	TB13	07																																																																				
TB16	0A	TB15	09																																																																				
TB18	0C	TB17	0B																																																																				
TB20	0E	TB19	0D																																																																				
TB22	COM0	TB21	0F																																																																				
TB24	10	TB23	NC																																																																				
TB26	12	TB25	11																																																																				
TB28	14	TB27	13																																																																				
TB30	16	TB29	15																																																																				
TB32	18	TB31	17																																																																				
TB34	1A	TB33	19																																																																				
TB36	1C	TB35	1B																																																																				
TB38	1E	TB37	1D																																																																				
TB40	COM1	TB39	1F																																																																				
TB42	24V	TB41	24G																																																																				

Transistor output wiring

(XBC-DN64H / XEC-DN64H)

Circuit configuration		No.	Contact	No.	Contact	Type																																																														
	TB2	FG	TB1	AC100	<table border="1"> <tr><td>FG</td><td>AC100 ~240V</td><td>TB1</td></tr> <tr><td>P</td><td>P20</td><td>TB3</td></tr> <tr><td>P21</td><td>P22</td><td>TB5</td></tr> <tr><td>P23</td><td>COM0</td><td>TB7</td></tr> <tr><td>P24</td><td>P25</td><td>TB9</td></tr> <tr><td>P26</td><td>P27</td><td>TB11</td></tr> <tr><td>COM1</td><td>P28</td><td>TB13</td></tr> <tr><td>P29</td><td>P2A</td><td>TB15</td></tr> <tr><td>P2B</td><td>COM2</td><td>TB17</td></tr> <tr><td>P2C</td><td>P2D</td><td>TB19</td></tr> <tr><td>P2E</td><td>P2F</td><td>TB21</td></tr> <tr><td>COM3</td><td>P30</td><td>TB23</td></tr> <tr><td>P31</td><td>P32</td><td>TB25</td></tr> <tr><td>P33</td><td>P34</td><td>TB27</td></tr> <tr><td>P35</td><td>P36</td><td>TB29</td></tr> <tr><td>P37</td><td>COM4</td><td>TB31</td></tr> <tr><td>P38</td><td>P40</td><td>TB33</td></tr> <tr><td>P3A</td><td>P3B</td><td>TB35</td></tr> <tr><td>P3C</td><td>P3D</td><td>TB37</td></tr> <tr><td>P3E</td><td>P3F</td><td>TB39</td></tr> <tr><td>COM5</td><td></td><td>TB41</td></tr> </table>	FG	AC100 ~240V	TB1	P	P20	TB3	P21	P22	TB5	P23	COM0	TB7	P24	P25	TB9	P26	P27	TB11	COM1	P28	TB13	P29	P2A	TB15	P2B	COM2	TB17	P2C	P2D	TB19	P2E	P2F	TB21	COM3	P30	TB23	P31	P32	TB25	P33	P34	TB27	P35	P36	TB29	P37	COM4	TB31	P38	P40	TB33	P3A	P3B	TB35	P3C	P3D	TB37	P3E	P3F	TB39	COM5		TB41
	FG	AC100 ~240V	TB1																																																																	
	P	P20	TB3																																																																	
	P21	P22	TB5																																																																	
	P23	COM0	TB7																																																																	
	P24	P25	TB9																																																																	
	P26	P27	TB11																																																																	
	COM1	P28	TB13																																																																	
	P29	P2A	TB15																																																																	
	P2B	COM2	TB17																																																																	
	P2C	P2D	TB19																																																																	
	P2E	P2F	TB21																																																																	
	COM3	P30	TB23																																																																	
	P31	P32	TB25																																																																	
	P33	P34	TB27																																																																	
	P35	P36	TB29																																																																	
	P37	COM4	TB31																																																																	
	P38	P40	TB33																																																																	
	P3A	P3B	TB35																																																																	
	P3C	P3D	TB37																																																																	
	P3E	P3F	TB39																																																																	
	COM5		TB41																																																																	
	TB4	DC12/24V	TB3	~240V																																																																
	TB6	21	TB5	20																																																																
TB8	23	TB7	22																																																																	
TB10	24	TB9	COM0																																																																	
TB12	26	TB11	25																																																																	
TB14	COM1	TB13	27																																																																	
TB16	29	TB15	28																																																																	
TB18	2B	TB17	2A																																																																	
TB20	2C	TB19	COM2																																																																	
TB22	2E	TB21	2D																																																																	
TB24	COM3	TB23	2F																																																																	
TB26	31	TB25	30																																																																	
TB28	33	TB27	32																																																																	
TB30	35	TB29	34																																																																	
TB32	37	TB31	36																																																																	
TB34	38	TB33	COM4																																																																	
TB36	3A	TB35	39																																																																	
TB38	3C	TB37	3B																																																																	
TB40	3E	TB39	3D																																																																	
TB42	COM5	TB41	3F																																																																	

High performance type (H-Type 64 points unit)

Relay output wiring
(XBC-DR64H / XEC-DR64H)

Circuit configuration		No.	Contact	No.	Contact	Type																																																																	
	TB2	FG	TB1	AC100	<table border="1"> <tr><td>+</td><td></td><td>TB1</td></tr> <tr><td>+</td><td></td><td>TB3</td></tr> <tr><td>+</td><td></td><td>TB5</td></tr> <tr><td>+</td><td></td><td>TB7</td></tr> <tr><td>+</td><td></td><td>TB9</td></tr> <tr><td>+</td><td></td><td>TB11</td></tr> <tr><td>+</td><td></td><td>TB13</td></tr> <tr><td>+</td><td></td><td>TB15</td></tr> <tr><td>+</td><td></td><td>TB17</td></tr> <tr><td>+</td><td></td><td>TB19</td></tr> <tr><td>+</td><td></td><td>TB21</td></tr> <tr><td>+</td><td></td><td>TB23</td></tr> <tr><td>+</td><td></td><td>TB25</td></tr> <tr><td>+</td><td></td><td>TB27</td></tr> <tr><td>+</td><td></td><td>TB29</td></tr> <tr><td>+</td><td></td><td>TB31</td></tr> <tr><td>+</td><td></td><td>TB33</td></tr> <tr><td>+</td><td></td><td>TB35</td></tr> <tr><td>+</td><td></td><td>TB37</td></tr> <tr><td>+</td><td></td><td>TB39</td></tr> <tr><td>+</td><td></td><td>TB41</td></tr> <tr><td>+</td><td></td><td>TB42</td></tr> </table>	+		TB1	+		TB3	+		TB5	+		TB7	+		TB9	+		TB11	+		TB13	+		TB15	+		TB17	+		TB19	+		TB21	+		TB23	+		TB25	+		TB27	+		TB29	+		TB31	+		TB33	+		TB35	+		TB37	+		TB39	+		TB41	+		TB42
	+		TB1																																																																				
	+		TB3																																																																				
	+		TB5																																																																				
	+		TB7																																																																				
	+		TB9																																																																				
	+		TB11																																																																				
	+		TB13																																																																				
	+		TB15																																																																				
	+		TB17																																																																				
	+		TB19																																																																				
	+		TB21																																																																				
	+		TB23																																																																				
	+		TB25																																																																				
	+		TB27																																																																				
	+		TB29																																																																				
	+		TB31																																																																				
	+		TB33																																																																				
	+		TB35																																																																				
	+		TB37																																																																				
	+		TB39																																																																				
	+		TB41																																																																				
	+		TB42																																																																				
	TB3	~240V	TB2	FG																																																																			
TB4	NC	TB4	NC																																																																				
TB6	21	TB6	P21																																																																				
TB8	23	TB8	P23																																																																				
TB10	24	TB10	P24																																																																				
TB12	26	TB12	P26																																																																				
TB14	COM1	TB14	COM 1																																																																				
TB16	29	TB16	P29																																																																				
TB18	2B	TB18	P2B																																																																				
TB20	2C	TB20	P2C																																																																				
TB22	2E	TB22	P2E																																																																				
TB24	COM3	TB24	COM 3																																																																				
TB26	31	TB26	P31																																																																				
TB28	33	TB28	P33																																																																				
TB30	35	TB30	P35																																																																				
TB32	37	TB32	P37																																																																				
TB34	38	TB34	P38																																																																				
TB36	3A	TB36	P3A																																																																				
TB38	3C	TB38	P3C																																																																				
TB40	3E	TB40	P3E																																																																				
TB42	COM5	TB42	COM 5																																																																				

Standard type

Input wiring
(XBC-DN20SU / XBC-DR20SU /
XEC-DN20S / XEC-DR20SU)

Circuit configuration		No.	Contact	No.	Contact	Type																																																																	
	TB2	485+	TB1	RX	<table border="1"> <tr><td>+</td><td></td><td>TB1</td></tr> <tr><td>+</td><td></td><td>TB3</td></tr> <tr><td>+</td><td></td><td>TB5</td></tr> <tr><td>+</td><td></td><td>TB7</td></tr> <tr><td>+</td><td></td><td>TB9</td></tr> <tr><td>+</td><td></td><td>TB11</td></tr> <tr><td>+</td><td></td><td>TB13</td></tr> <tr><td>+</td><td></td><td>TB15</td></tr> <tr><td>+</td><td></td><td>TB17</td></tr> <tr><td>+</td><td></td><td>TB19</td></tr> <tr><td>+</td><td></td><td>TB21</td></tr> <tr><td>+</td><td></td><td>TB23</td></tr> <tr><td>+</td><td></td><td>TB25</td></tr> <tr><td>+</td><td></td><td>TB27</td></tr> <tr><td>+</td><td></td><td>TB29</td></tr> <tr><td>+</td><td></td><td>TB31</td></tr> <tr><td>+</td><td></td><td>TB33</td></tr> <tr><td>+</td><td></td><td>TB35</td></tr> <tr><td>+</td><td></td><td>TB37</td></tr> <tr><td>+</td><td></td><td>TB39</td></tr> <tr><td>+</td><td></td><td>TB41</td></tr> <tr><td>+</td><td></td><td>TB42</td></tr> </table>	+		TB1	+		TB3	+		TB5	+		TB7	+		TB9	+		TB11	+		TB13	+		TB15	+		TB17	+		TB19	+		TB21	+		TB23	+		TB25	+		TB27	+		TB29	+		TB31	+		TB33	+		TB35	+		TB37	+		TB39	+		TB41	+		TB42
	+		TB1																																																																				
	+		TB3																																																																				
	+		TB5																																																																				
	+		TB7																																																																				
	+		TB9																																																																				
	+		TB11																																																																				
	+		TB13																																																																				
	+		TB15																																																																				
	+		TB17																																																																				
	+		TB19																																																																				
	+		TB21																																																																				
	+		TB23																																																																				
	+		TB25																																																																				
+		TB27																																																																					
+		TB29																																																																					
+		TB31																																																																					
+		TB33																																																																					
+		TB35																																																																					
+		TB37																																																																					
+		TB39																																																																					
+		TB41																																																																					
+		TB42																																																																					
TB4	485-	TB3	TX																																																																				
TB6	00	TB5	SG																																																																				
TB8	02	TB7	01																																																																				
TB10	04	TB9	03																																																																				
TB12	06	TB11	05																																																																				
TB14	08	TB13	07																																																																				
TB16	0A	TB15	09																																																																				
TB18	NC	TB17	0B																																																																				
TB20	NC	TB19	NC																																																																				
TB22	NC	TB21	NC																																																																				
TB24	COM	TB23	NC																																																																				



Transistor output wiring
(XBC-DN20SU/XEC-DN20SU)

Circuit configuration		No.	Contact	No.	Contact	Type																																						
	TB2	FG	TB1	AC100	<table border="1"> <tr><td>+</td><td></td><td>TB1</td></tr> <tr><td>FG</td><td>AC100 ~240Y</td><td>TB3</td></tr> <tr><td>COM 0</td><td>P40</td><td>TB5</td></tr> <tr><td>COM 1</td><td>P41</td><td>TB7</td></tr> <tr><td>COM 2</td><td>P42</td><td>TB9</td></tr> <tr><td>P43</td><td>P</td><td>TB11</td></tr> <tr><td>COM 3</td><td>P44</td><td>TB13</td></tr> <tr><td>P45</td><td>P46</td><td>TB15</td></tr> <tr><td>P47</td><td>NC</td><td>TB17</td></tr> <tr><td>NC</td><td>NC</td><td>TB19</td></tr> <tr><td>NC</td><td>NC</td><td>TB21</td></tr> <tr><td>NC</td><td>24V</td><td>TB23</td></tr> <tr><td>24G</td><td>+</td><td></td></tr> </table>	+		TB1	FG	AC100 ~240Y	TB3	COM 0	P40	TB5	COM 1	P41	TB7	COM 2	P42	TB9	P43	P	TB11	COM 3	P44	TB13	P45	P46	TB15	P47	NC	TB17	NC	NC	TB19	NC	NC	TB21	NC	24V	TB23	24G	+	
	+		TB1																																									
	FG	AC100 ~240Y	TB3																																									
	COM 0	P40	TB5																																									
	COM 1	P41	TB7																																									
	COM 2	P42	TB9																																									
	P43	P	TB11																																									
	COM 3	P44	TB13																																									
	P45	P46	TB15																																									
	P47	NC	TB17																																									
	NC	NC	TB19																																									
	NC	NC	TB21																																									
	NC	24V	TB23																																									
	24G	+																																										
	TB4	COM0	TB3	~240V																																								
	TB6	COM1	TB5	40																																								
TB8	COM2	TB7	41																																									
TB10	43	TB9	42																																									
TB12	COM3	TB11	P																																									
TB14	45	TB13	44																																									
TB16	47	TB15	46																																									
TB18	NC	TB17	NC																																									
TB20	NC	TB19	NC																																									
TB22	NC	TB21	NC																																									
TB24	24G	TB23	24V																																									

Relay output wiring
(XBC-DR20SU/XEC-DR20SU)

Circuit configuration		No.	Contact	No.	Contact	Type																																						
	TB2	FG	TB1	AC100	<table border="1"> <tr><td>+</td><td></td><td>TB1</td></tr> <tr><td>FG</td><td>AC100 ~240Y</td><td>TB3</td></tr> <tr><td>COM 0</td><td>P40</td><td>TB5</td></tr> <tr><td>COM 1</td><td>P41</td><td>TB7</td></tr> <tr><td>COM 2</td><td>P42</td><td>TB9</td></tr> <tr><td>P43</td><td>NC</td><td>TB11</td></tr> <tr><td>COM 3</td><td>P44</td><td>TB13</td></tr> <tr><td>P45</td><td>P46</td><td>TB15</td></tr> <tr><td>P47</td><td>NC</td><td>TB17</td></tr> <tr><td>NC</td><td>NC</td><td>TB19</td></tr> <tr><td>NC</td><td>NC</td><td>TB21</td></tr> <tr><td>NC</td><td>24V</td><td>TB23</td></tr> <tr><td>24G</td><td>+</td><td></td></tr> </table>	+		TB1	FG	AC100 ~240Y	TB3	COM 0	P40	TB5	COM 1	P41	TB7	COM 2	P42	TB9	P43	NC	TB11	COM 3	P44	TB13	P45	P46	TB15	P47	NC	TB17	NC	NC	TB19	NC	NC	TB21	NC	24V	TB23	24G	+	
	+		TB1																																									
	FG	AC100 ~240Y	TB3																																									
	COM 0	P40	TB5																																									
	COM 1	P41	TB7																																									
	COM 2	P42	TB9																																									
	P43	NC	TB11																																									
	COM 3	P44	TB13																																									
	P45	P46	TB15																																									
	P47	NC	TB17																																									
	NC	NC	TB19																																									
	NC	NC	TB21																																									
	NC	24V	TB23																																									
	24G	+																																										
	TB4	COM0	TB3	~240V																																								
	TB6	COM1	TB5	40																																								
TB8	COM2	TB7	41																																									
TB10	43	TB9	42																																									
TB12	COM3	TB11	NC																																									
TB14	45	TB13	44																																									
TB16	47	TB15	46																																									
TB18	NC	TB17	NC																																									
TB20	NC	TB19	NC																																									
TB22	NC	TB21	NC																																									
TB24	24G	TB23	24V																																									

Input wiring
(XBC-DN30SU/XBC-DR30SU/
XEC-DN30SU/XEC-DR30SU)

Circuit configuration		No.	Contact	No.	Contact	Type																																						
	TB2	485+	TB1	RX	<table border="1"> <tr><td>+</td><td></td><td>TB1</td></tr> <tr><td>485 +</td><td>RX</td><td>TB3</td></tr> <tr><td>485 -</td><td>TX</td><td>TB5</td></tr> <tr><td>P00</td><td>SG</td><td>TB7</td></tr> <tr><td>P02</td><td>P01</td><td>TB9</td></tr> <tr><td>P04</td><td>P03</td><td>TB11</td></tr> <tr><td>P06</td><td>P05</td><td>TB13</td></tr> <tr><td>P08</td><td>P07</td><td>TB15</td></tr> <tr><td>P0A</td><td>P0B</td><td>TB17</td></tr> <tr><td>P0C</td><td>P0D</td><td>TB19</td></tr> <tr><td>P0E</td><td>P0F</td><td>TB21</td></tr> <tr><td>P10</td><td>P11</td><td>TB23</td></tr> <tr><td>COM</td><td>+</td><td></td></tr> </table>	+		TB1	485 +	RX	TB3	485 -	TX	TB5	P00	SG	TB7	P02	P01	TB9	P04	P03	TB11	P06	P05	TB13	P08	P07	TB15	P0A	P0B	TB17	P0C	P0D	TB19	P0E	P0F	TB21	P10	P11	TB23	COM	+	
	+		TB1																																									
	485 +	RX	TB3																																									
	485 -	TX	TB5																																									
	P00	SG	TB7																																									
	P02	P01	TB9																																									
	P04	P03	TB11																																									
	P06	P05	TB13																																									
	P08	P07	TB15																																									
	P0A	P0B	TB17																																									
	P0C	P0D	TB19																																									
	P0E	P0F	TB21																																									
	P10	P11	TB23																																									
	COM	+																																										
	TB4	485-	TB3	TX																																								
	TB6	00	TB5	SG																																								
TB8	02	TB7	01																																									
TB10	04	TB9	03																																									
TB12	06	TB11	05																																									
TB14	08	TB13	07																																									
TB16	0A	TB15	09																																									
TB18	0C	TB17	0B																																									
TB20	0E	TB19	0D																																									
TB22	10	TB21	0F																																									
TB24	COM	TB23	11																																									

Standard type

Transistor output wiring (XBC-DN30SU/ XEC-DN30SU)

Circuit configuration		No.	Contact	No.	Contact	Type																									
	TB2	FG	TB1	AC100	<table border="1"> <tr><td>AC100 ~240V</td><td>TB1</td></tr> <tr><td>FG</td><td>TB3</td></tr> <tr><td>COM 0</td><td>TB5</td></tr> <tr><td>COM 1</td><td>TB7</td></tr> <tr><td>COM 2</td><td>TB9</td></tr> <tr><td>P43</td><td>TB11</td></tr> <tr><td>COM 3</td><td>TB13</td></tr> <tr><td>P45</td><td>TB15</td></tr> <tr><td>P47</td><td>TB17</td></tr> <tr><td>COM 4</td><td>TB19</td></tr> <tr><td>P49</td><td>TB21</td></tr> <tr><td>P4B</td><td>TB23</td></tr> <tr><td>24G</td><td>TB24</td></tr> </table>	AC100 ~240V	TB1	FG	TB3	COM 0	TB5	COM 1	TB7	COM 2	TB9	P43	TB11	COM 3	TB13	P45	TB15	P47	TB17	COM 4	TB19	P49	TB21	P4B	TB23	24G	TB24
	AC100 ~240V	TB1																													
	FG	TB3																													
	COM 0	TB5																													
	COM 1	TB7																													
	COM 2	TB9																													
	P43	TB11																													
	COM 3	TB13																													
	P45	TB15																													
	P47	TB17																													
	COM 4	TB19																													
	P49	TB21																													
	P4B	TB23																													
	24G	TB24																													
TB4	COM0	TB3	~240V																												
TB6	COM1	TB5	40																												
TB8	COM2	TB7	41																												
TB10	43	TB9	42																												
TB12	COM3	TB11	P																												
TB14	45	TB13	44																												
TB16	47	TB15	46																												
TB18	COM4	TB17	NC																												
TB20	49	TB19	48																												
TB22	4B	TB21	4A																												
TB24	24G	TB23	24V																												

Relay output wiring (XBC-DR30SU/ XEC-DR30SU)

Circuit configuration		No.	Contact	No.	Contact	Type																									
	TB2	FG	TB1	AC100	<table border="1"> <tr><td>AC100 ~240V</td><td>TB1</td></tr> <tr><td>FG</td><td>TB3</td></tr> <tr><td>COM 0</td><td>TB5</td></tr> <tr><td>COM 1</td><td>TB7</td></tr> <tr><td>COM 2</td><td>TB9</td></tr> <tr><td>P43</td><td>TB11</td></tr> <tr><td>COM 3</td><td>TB13</td></tr> <tr><td>P45</td><td>TB15</td></tr> <tr><td>P47</td><td>TB17</td></tr> <tr><td>COM 4</td><td>TB19</td></tr> <tr><td>P49</td><td>TB21</td></tr> <tr><td>P4B</td><td>TB23</td></tr> <tr><td>24G</td><td>TB24</td></tr> </table>	AC100 ~240V	TB1	FG	TB3	COM 0	TB5	COM 1	TB7	COM 2	TB9	P43	TB11	COM 3	TB13	P45	TB15	P47	TB17	COM 4	TB19	P49	TB21	P4B	TB23	24G	TB24
	AC100 ~240V	TB1																													
	FG	TB3																													
	COM 0	TB5																													
	COM 1	TB7																													
	COM 2	TB9																													
	P43	TB11																													
	COM 3	TB13																													
	P45	TB15																													
	P47	TB17																													
	COM 4	TB19																													
	P49	TB21																													
	P4B	TB23																													
	24G	TB24																													
TB4	COM0	TB3	~240V																												
TB6	COM1	TB5	40																												
TB8	COM2	TB7	41																												
TB10	43	TB9	42																												
TB12	COM3	TB11	NC																												
TB14	45	TB13	44																												
TB16	47	TB15	46																												
TB18	COM4	TB17	NC																												
TB20	49	TB19	48																												
TB22	4B	TB21	4A																												
TB24	24G	TB23	24V																												

Input wiring (XBC-DN40SU/ XEC-DN40SU)

Circuit configuration		No.	Contact	No.	Contact	Type																															
	TB2	485+	TB1	RX	<table border="1"> <tr><td>PX</td><td>TB1</td></tr> <tr><td>485+</td><td>TB3</td></tr> <tr><td>485-</td><td>TB5</td></tr> <tr><td>P00</td><td>TB7</td></tr> <tr><td>P02</td><td>TB9</td></tr> <tr><td>P04</td><td>TB11</td></tr> <tr><td>P06</td><td>TB13</td></tr> <tr><td>P08</td><td>TB15</td></tr> <tr><td>P0A</td><td>TB17</td></tr> <tr><td>P0C</td><td>TB19</td></tr> <tr><td>P0E</td><td>TB21</td></tr> <tr><td>P10</td><td>TB23</td></tr> <tr><td>P12</td><td>TB25</td></tr> <tr><td>P14</td><td>TB27</td></tr> <tr><td>P16</td><td>TB29</td></tr> <tr><td>COM</td><td></td></tr> </table>	PX	TB1	485+	TB3	485-	TB5	P00	TB7	P02	TB9	P04	TB11	P06	TB13	P08	TB15	P0A	TB17	P0C	TB19	P0E	TB21	P10	TB23	P12	TB25	P14	TB27	P16	TB29	COM	
	PX	TB1																																			
	485+	TB3																																			
	485-	TB5																																			
	P00	TB7																																			
	P02	TB9																																			
	P04	TB11																																			
	P06	TB13																																			
	P08	TB15																																			
	P0A	TB17																																			
	P0C	TB19																																			
	P0E	TB21																																			
	P10	TB23																																			
	P12	TB25																																			
P14	TB27																																				
P16	TB29																																				
COM																																					
TB4	485-	TB3	TX																																		
TB6	00	TB5	SG																																		
TB8	02	TB7	01																																		
TB10	04	TB9	03																																		
TB12	06	TB11	05																																		
TB14	08	TB13	07																																		
TB16	0A	TB15	09																																		
TB18	0C	TB17	0B																																		
TB20	0E	TB19	0D																																		
TB22	10	TB21	0F																																		
TB24	12	TB23	11																																		
TB26	14	TB25	13																																		
TB28	16	TB27	15																																		
TB30	COM	TB29	17																																		

Transistor output wiring
(XBC-DN40SU/XEC-DN40SU)

Circuit configuration		No.	Contact	No.	Contact	Type																																																			
		TB2	FG	TB1	AG100	<table border="1"> <tr><td>⊕</td><td></td><td>TB1</td></tr> <tr><td>FG</td><td>AG100</td><td>TB3</td></tr> <tr><td></td><td>-240V</td><td>TB5</td></tr> <tr><td>COM0</td><td>P40</td><td>TB7</td></tr> <tr><td>COM1</td><td>P41</td><td>TB9</td></tr> <tr><td>COM2</td><td>P42</td><td>TB11</td></tr> <tr><td></td><td>P</td><td>TB13</td></tr> <tr><td>COM3</td><td>P44</td><td>TB15</td></tr> <tr><td>P45</td><td>P46</td><td>TB17</td></tr> <tr><td>P47</td><td>NC</td><td>TB19</td></tr> <tr><td>COM4</td><td>P48</td><td>TB21</td></tr> <tr><td>P49</td><td>P4A</td><td>TB23</td></tr> <tr><td>P4B</td><td>NC</td><td>TB25</td></tr> <tr><td>COM5</td><td>P4C</td><td>TB27</td></tr> <tr><td>P4D</td><td>P4E</td><td>TB29</td></tr> <tr><td>P4F</td><td>24V</td><td></td></tr> <tr><td>24G</td><td>⊕</td><td></td></tr> </table>	⊕		TB1	FG	AG100	TB3		-240V	TB5	COM0	P40	TB7	COM1	P41	TB9	COM2	P42	TB11		P	TB13	COM3	P44	TB15	P45	P46	TB17	P47	NC	TB19	COM4	P48	TB21	P49	P4A	TB23	P4B	NC	TB25	COM5	P4C	TB27	P4D	P4E	TB29	P4F	24V		24G	⊕	
		⊕		TB1																																																					
		FG	AG100	TB3																																																					
			-240V	TB5																																																					
		COM0	P40	TB7																																																					
		COM1	P41	TB9																																																					
		COM2	P42	TB11																																																					
			P	TB13																																																					
		COM3	P44	TB15																																																					
		P45	P46	TB17																																																					
		P47	NC	TB19																																																					
		COM4	P48	TB21																																																					
		P49	P4A	TB23																																																					
		P4B	NC	TB25																																																					
		COM5	P4C	TB27																																																					
		P4D	P4E	TB29																																																					
		P4F	24V																																																						
		24G	⊕																																																						
		TB4	COM0	TB3	-240V																																																				
		TB6	COM1	TB5	40																																																				
		TB8	COM2	TB7	41																																																				
		TB10	43	TB9	42																																																				
		TB12	COM3	TB11	P																																																				
		TB14	45	TB13	44																																																				
		TB16	47	TB15	46																																																				
		TB18	COM4	TB17	NC																																																				
		TB20	49	TB19	48																																																				
		TB22	4B	TB21	4A																																																				
		TB24	COM5	TB23	NC																																																				
		TB26	4D	TB25	4C																																																				
TB28	4F	TB27	4E																																																						
TB30	24G	TB29	24V																																																						

Input wiring
(XBC-DR40SU/XEC-DR40SU)

Circuit configuration		No.	Contact	No.	Contact	Type																																																			
		TB2	485+	TB1	RX	<table border="1"> <tr><td>⊕</td><td></td><td>TB1</td></tr> <tr><td>485+</td><td>PX</td><td>TB3</td></tr> <tr><td>485-</td><td>TX</td><td>TB5</td></tr> <tr><td></td><td>SG</td><td>TB7</td></tr> <tr><td>P00</td><td>P01</td><td>TB9</td></tr> <tr><td>P02</td><td>P03</td><td>TB11</td></tr> <tr><td>P04</td><td>P05</td><td>TB13</td></tr> <tr><td>P06</td><td>P07</td><td>TB15</td></tr> <tr><td>P08</td><td>P09</td><td>TB17</td></tr> <tr><td>P0A</td><td>P0B</td><td>TB19</td></tr> <tr><td>P0C</td><td>P0D</td><td>TB21</td></tr> <tr><td>P0E</td><td>P0F</td><td>TB23</td></tr> <tr><td>P10</td><td>P11</td><td>TB25</td></tr> <tr><td>P12</td><td>P13</td><td>TB27</td></tr> <tr><td>P14</td><td>P15</td><td>TB29</td></tr> <tr><td>P16</td><td>P17</td><td></td></tr> <tr><td>COM</td><td>⊕</td><td></td></tr> </table>	⊕		TB1	485+	PX	TB3	485-	TX	TB5		SG	TB7	P00	P01	TB9	P02	P03	TB11	P04	P05	TB13	P06	P07	TB15	P08	P09	TB17	P0A	P0B	TB19	P0C	P0D	TB21	P0E	P0F	TB23	P10	P11	TB25	P12	P13	TB27	P14	P15	TB29	P16	P17		COM	⊕	
		⊕		TB1																																																					
		485+	PX	TB3																																																					
		485-	TX	TB5																																																					
			SG	TB7																																																					
		P00	P01	TB9																																																					
		P02	P03	TB11																																																					
		P04	P05	TB13																																																					
		P06	P07	TB15																																																					
		P08	P09	TB17																																																					
		P0A	P0B	TB19																																																					
		P0C	P0D	TB21																																																					
		P0E	P0F	TB23																																																					
		P10	P11	TB25																																																					
		P12	P13	TB27																																																					
		P14	P15	TB29																																																					
		P16	P17																																																						
		COM	⊕																																																						
		TB4	485-	TB3	TX																																																				
		TB6	00	TB5	SG																																																				
TB8	02	TB7	01																																																						
TB10	04	TB9	03																																																						
TB12	06	TB11	05																																																						
TB14	08	TB13	07																																																						
TB16	0A	TB15	09																																																						
TB18	0C	TB17	0B																																																						
TB20	0E	TB19	0D																																																						
TB22	10	TB21	0F																																																						
TB24	12	TB23	11																																																						
TB26	14	TB25	13																																																						
TB28	16	TB27	15																																																						
TB30	COM	TB29	17																																																						

Relay output wiring
(XBC-DR40SU/XEC-DR40SU)

Circuit configuration		No.	Contact	No.	Contact	Type																																																			
		TB2	FG	TB1	RX	<table border="1"> <tr><td>⊕</td><td></td><td>TB1</td></tr> <tr><td>FG</td><td>AG100</td><td>TB3</td></tr> <tr><td></td><td>-240V</td><td>TB5</td></tr> <tr><td>COM0</td><td>P40</td><td>TB7</td></tr> <tr><td>COM1</td><td>P41</td><td>TB9</td></tr> <tr><td>COM2</td><td>P42</td><td>TB11</td></tr> <tr><td>P43</td><td>P</td><td>TB13</td></tr> <tr><td>COM3</td><td>P44</td><td>TB15</td></tr> <tr><td>P45</td><td>P46</td><td>TB17</td></tr> <tr><td>P47</td><td>NC</td><td>TB19</td></tr> <tr><td>COM4</td><td>P48</td><td>TB21</td></tr> <tr><td>P49</td><td>P4A</td><td>TB23</td></tr> <tr><td>P4B</td><td>NC</td><td>TB25</td></tr> <tr><td>COM5</td><td>P4C</td><td>TB27</td></tr> <tr><td>P4D</td><td>P4E</td><td>TB29</td></tr> <tr><td>P4F</td><td>24V</td><td></td></tr> <tr><td>24G</td><td>⊕</td><td></td></tr> </table>	⊕		TB1	FG	AG100	TB3		-240V	TB5	COM0	P40	TB7	COM1	P41	TB9	COM2	P42	TB11	P43	P	TB13	COM3	P44	TB15	P45	P46	TB17	P47	NC	TB19	COM4	P48	TB21	P49	P4A	TB23	P4B	NC	TB25	COM5	P4C	TB27	P4D	P4E	TB29	P4F	24V		24G	⊕	
		⊕		TB1																																																					
		FG	AG100	TB3																																																					
			-240V	TB5																																																					
		COM0	P40	TB7																																																					
		COM1	P41	TB9																																																					
		COM2	P42	TB11																																																					
		P43	P	TB13																																																					
		COM3	P44	TB15																																																					
		P45	P46	TB17																																																					
		P47	NC	TB19																																																					
		COM4	P48	TB21																																																					
		P49	P4A	TB23																																																					
		P4B	NC	TB25																																																					
		COM5	P4C	TB27																																																					
		P4D	P4E	TB29																																																					
		P4F	24V																																																						
		24G	⊕																																																						
		TB4	COM0	TB3	TX																																																				
		TB6	COM1	TB5	SG																																																				
TB8	COM2	TB7	01																																																						
TB10	43	TB9	03																																																						
TB12	COM3	TB11	05																																																						
TB14	45	TB13	07																																																						
TB16	47	TB15	09																																																						
TB18	COM4	TB17	0B																																																						
TB20	49	TB19	00																																																						
TB22	4B	TB21	0F																																																						
TB24	COM5	TB23	11																																																						
TB26	4D	TB25	13																																																						
TB28	4F	TB27	15																																																						
TB30	24G	TB29	17																																																						

Standard type

Input wiring

(XBC-DN60SU/ XEC-DN60SU)

Circuit configuration		No.	Contact	No.	Contact	Type																																																																																			
<p>Terminal block no.</p>	TB2	485+	TB1	RX	<table border="1"> <tr><td>TB2</td><td>485+</td><td>PX</td><td>TB1</td></tr> <tr><td>TB4</td><td>485-</td><td>TX</td><td>TB3</td></tr> <tr><td>TB6</td><td>P00</td><td>SG</td><td>TB5</td></tr> <tr><td>TB8</td><td>P02</td><td>P01</td><td>TB7</td></tr> <tr><td>TB10</td><td>P04</td><td>P03</td><td>TB9</td></tr> <tr><td>TB12</td><td>P06</td><td>P05</td><td>TB11</td></tr> <tr><td>TB14</td><td>P08</td><td>P07</td><td>TB13</td></tr> <tr><td>TB16</td><td>P0A</td><td>P09</td><td>TB15</td></tr> <tr><td>TB18</td><td>P00</td><td>P0B</td><td>TB17</td></tr> <tr><td>TB20</td><td>P0E</td><td>P0D</td><td>TB19</td></tr> <tr><td>TB22</td><td>P10</td><td>P0F</td><td>TB21</td></tr> <tr><td>TB24</td><td>P12</td><td>P11</td><td>TB23</td></tr> <tr><td>TB26</td><td>P14</td><td>P13</td><td>TB25</td></tr> <tr><td>TB28</td><td>P16</td><td>P15</td><td>TB27</td></tr> <tr><td>TB30</td><td>P18</td><td>P17</td><td>TB29</td></tr> <tr><td>TB32</td><td>P1A</td><td>P19</td><td>TB31</td></tr> <tr><td>TB34</td><td>P1C</td><td>P1B</td><td>TB33</td></tr> <tr><td>TB36</td><td>P1E</td><td>P1D</td><td>TB35</td></tr> <tr><td>TB38</td><td>P20</td><td>P1F</td><td>TB37</td></tr> <tr><td>TB40</td><td>P22</td><td>P21</td><td>TB39</td></tr> <tr><td>TB42</td><td>COM</td><td>P23</td><td>TB41</td></tr> </table>	TB2	485+	PX	TB1	TB4	485-	TX	TB3	TB6	P00	SG	TB5	TB8	P02	P01	TB7	TB10	P04	P03	TB9	TB12	P06	P05	TB11	TB14	P08	P07	TB13	TB16	P0A	P09	TB15	TB18	P00	P0B	TB17	TB20	P0E	P0D	TB19	TB22	P10	P0F	TB21	TB24	P12	P11	TB23	TB26	P14	P13	TB25	TB28	P16	P15	TB27	TB30	P18	P17	TB29	TB32	P1A	P19	TB31	TB34	P1C	P1B	TB33	TB36	P1E	P1D	TB35	TB38	P20	P1F	TB37	TB40	P22	P21	TB39	TB42	COM	P23	TB41
	TB2	485+	PX	TB1																																																																																					
	TB4	485-	TX	TB3																																																																																					
	TB6	P00	SG	TB5																																																																																					
	TB8	P02	P01	TB7																																																																																					
	TB10	P04	P03	TB9																																																																																					
	TB12	P06	P05	TB11																																																																																					
	TB14	P08	P07	TB13																																																																																					
	TB16	P0A	P09	TB15																																																																																					
	TB18	P00	P0B	TB17																																																																																					
	TB20	P0E	P0D	TB19																																																																																					
	TB22	P10	P0F	TB21																																																																																					
	TB24	P12	P11	TB23																																																																																					
	TB26	P14	P13	TB25																																																																																					
	TB28	P16	P15	TB27																																																																																					
	TB30	P18	P17	TB29																																																																																					
	TB32	P1A	P19	TB31																																																																																					
	TB34	P1C	P1B	TB33																																																																																					
	TB36	P1E	P1D	TB35																																																																																					
	TB38	P20	P1F	TB37																																																																																					
	TB40	P22	P21	TB39																																																																																					
	TB42	COM	P23	TB41																																																																																					
	TB4	485-	TB3	TX																																																																																					
TB6	00	TB5	SG																																																																																						
TB8	02	TB7	01																																																																																						
TB10	04	TB9	03																																																																																						
TB12	06	TB11	05																																																																																						
TB14	08	TB13	07																																																																																						
TB16	0A	TB15	09																																																																																						
TB18	0C	TB17	0B																																																																																						
TB20	0E	TB19	0D																																																																																						
TB22	10	TB21	0F																																																																																						
TB24	12	TB23	11																																																																																						
TB26	14	TB25	13																																																																																						
TB28	16	TB27	15																																																																																						
TB30	18	TB29	17																																																																																						
TB32	1A	TB31	19																																																																																						
TB34	1C	TB33	1B																																																																																						
TB36	1E	TB35	1D																																																																																						
TB38	20	TB37	1F																																																																																						
TB40	22	TB39	21																																																																																						
TB42	COM	TB41	23																																																																																						

Transistor output wiring

(XBC-DN60SU/ XEC-DN60SU)

Circuit configuration		No.	Contact	No.	Contact	Type																																																																																			
<p>Terminal No.</p>	TB2	FG	TB1	AG100	<table border="1"> <tr><td>TB2</td><td>485+</td><td>PX</td><td>TB1</td></tr> <tr><td>TB4</td><td>485-</td><td>TX</td><td>TB3</td></tr> <tr><td>TB6</td><td>P00</td><td>SG</td><td>TB5</td></tr> <tr><td>TB8</td><td>P02</td><td>P01</td><td>TB7</td></tr> <tr><td>TB10</td><td>P04</td><td>P03</td><td>TB9</td></tr> <tr><td>TB12</td><td>P06</td><td>P05</td><td>TB11</td></tr> <tr><td>TB14</td><td>P08</td><td>P07</td><td>TB13</td></tr> <tr><td>TB16</td><td>P0A</td><td>P09</td><td>TB15</td></tr> <tr><td>TB18</td><td>P00</td><td>P0B</td><td>TB17</td></tr> <tr><td>TB20</td><td>P0E</td><td>P0D</td><td>TB19</td></tr> <tr><td>TB22</td><td>P10</td><td>P0F</td><td>TB21</td></tr> <tr><td>TB24</td><td>P12</td><td>P11</td><td>TB23</td></tr> <tr><td>TB26</td><td>P14</td><td>P13</td><td>TB25</td></tr> <tr><td>TB28</td><td>P16</td><td>P15</td><td>TB27</td></tr> <tr><td>TB30</td><td>P18</td><td>P17</td><td>TB29</td></tr> <tr><td>TB32</td><td>P1A</td><td>P19</td><td>TB31</td></tr> <tr><td>TB34</td><td>P1C</td><td>P1B</td><td>TB33</td></tr> <tr><td>TB36</td><td>P1E</td><td>P1D</td><td>TB35</td></tr> <tr><td>TB38</td><td>P20</td><td>P1F</td><td>TB37</td></tr> <tr><td>TB40</td><td>P22</td><td>P21</td><td>TB39</td></tr> <tr><td>TB42</td><td>COM</td><td>P23</td><td>TB41</td></tr> </table>	TB2	485+	PX	TB1	TB4	485-	TX	TB3	TB6	P00	SG	TB5	TB8	P02	P01	TB7	TB10	P04	P03	TB9	TB12	P06	P05	TB11	TB14	P08	P07	TB13	TB16	P0A	P09	TB15	TB18	P00	P0B	TB17	TB20	P0E	P0D	TB19	TB22	P10	P0F	TB21	TB24	P12	P11	TB23	TB26	P14	P13	TB25	TB28	P16	P15	TB27	TB30	P18	P17	TB29	TB32	P1A	P19	TB31	TB34	P1C	P1B	TB33	TB36	P1E	P1D	TB35	TB38	P20	P1F	TB37	TB40	P22	P21	TB39	TB42	COM	P23	TB41
	TB2	485+	PX	TB1																																																																																					
	TB4	485-	TX	TB3																																																																																					
	TB6	P00	SG	TB5																																																																																					
	TB8	P02	P01	TB7																																																																																					
	TB10	P04	P03	TB9																																																																																					
	TB12	P06	P05	TB11																																																																																					
	TB14	P08	P07	TB13																																																																																					
	TB16	P0A	P09	TB15																																																																																					
	TB18	P00	P0B	TB17																																																																																					
	TB20	P0E	P0D	TB19																																																																																					
	TB22	P10	P0F	TB21																																																																																					
	TB24	P12	P11	TB23																																																																																					
	TB26	P14	P13	TB25																																																																																					
	TB28	P16	P15	TB27																																																																																					
	TB30	P18	P17	TB29																																																																																					
	TB32	P1A	P19	TB31																																																																																					
	TB34	P1C	P1B	TB33																																																																																					
	TB36	P1E	P1D	TB35																																																																																					
	TB38	P20	P1F	TB37																																																																																					
	TB40	P22	P21	TB39																																																																																					
	TB42	COM	P23	TB41																																																																																					
	TB4	COM0	TB3	-240V																																																																																					
TB6	COM1	TB5	40																																																																																						
TB8	COM2	TB7	41																																																																																						
TB10	43	TB9	42																																																																																						
TB12	COM3	TB11	P																																																																																						
TB14	45	TB13	44																																																																																						
TB16	47	TB15	46																																																																																						
TB18	COM4	TB17	NC																																																																																						
TB20	49	TB19	48																																																																																						
TB22	4B	TB21	4A																																																																																						
TB24	COM5	TB23	NC																																																																																						
TB26	4D	TB25	4C																																																																																						
TB28	4F	TB27	4E																																																																																						
TB30	COM6	TB29	NC																																																																																						
TB32	51	TB31	50																																																																																						
TB34	53	TB33	52																																																																																						
TB36	COM7	TB35	NC																																																																																						
TB38	55	TB37	54																																																																																						
TB40	57	TB39	56																																																																																						
TB42	24G	TB41	24V																																																																																						

Input wiring
(XBC-DR60SU/XEC-DR60SU)

Circuit configuration		No.	Contact	No.	Contact	Type																																																																																			
	TB2	485+	TB1	RX	<table border="1"> <tr> <td>TB2</td> <td>485+</td> <td>PX</td> <td>TB1</td> </tr> <tr> <td>TB4</td> <td>485-</td> <td>TX</td> <td>TB3</td> </tr> <tr> <td>TB6</td> <td>P00</td> <td>SG</td> <td>TB5</td> </tr> <tr> <td>TB8</td> <td>P02</td> <td>P01</td> <td>TB7</td> </tr> <tr> <td>TB10</td> <td>P04</td> <td>P03</td> <td>TB9</td> </tr> <tr> <td>TB12</td> <td>P06</td> <td>P05</td> <td>TB11</td> </tr> <tr> <td>TB14</td> <td>P08</td> <td>P07</td> <td>TB13</td> </tr> <tr> <td>TB16</td> <td>P0A</td> <td>P09</td> <td>TB15</td> </tr> <tr> <td>TB18</td> <td>P00</td> <td>P0B</td> <td>TB17</td> </tr> <tr> <td>TB20</td> <td>P0E</td> <td>P0D</td> <td>TB19</td> </tr> <tr> <td>TB22</td> <td>P10</td> <td>P0F</td> <td>TB21</td> </tr> <tr> <td>TB24</td> <td>P12</td> <td>P11</td> <td>TB23</td> </tr> <tr> <td>TB26</td> <td>P14</td> <td>P13</td> <td>TB25</td> </tr> <tr> <td>TB28</td> <td>P16</td> <td>P15</td> <td>TB27</td> </tr> <tr> <td>TB30</td> <td>P18</td> <td>P17</td> <td>TB29</td> </tr> <tr> <td>TB32</td> <td>P1A</td> <td>P19</td> <td>TB31</td> </tr> <tr> <td>TB34</td> <td>P1C</td> <td>P1B</td> <td>TB33</td> </tr> <tr> <td>TB36</td> <td>P1E</td> <td>P1D</td> <td>TB35</td> </tr> <tr> <td>TB38</td> <td>P20</td> <td>P1F</td> <td>TB37</td> </tr> <tr> <td>TB40</td> <td>P22</td> <td>P21</td> <td>TB39</td> </tr> <tr> <td>TB42</td> <td>COM</td> <td>P23</td> <td>TB41</td> </tr> </table>	TB2	485+	PX	TB1	TB4	485-	TX	TB3	TB6	P00	SG	TB5	TB8	P02	P01	TB7	TB10	P04	P03	TB9	TB12	P06	P05	TB11	TB14	P08	P07	TB13	TB16	P0A	P09	TB15	TB18	P00	P0B	TB17	TB20	P0E	P0D	TB19	TB22	P10	P0F	TB21	TB24	P12	P11	TB23	TB26	P14	P13	TB25	TB28	P16	P15	TB27	TB30	P18	P17	TB29	TB32	P1A	P19	TB31	TB34	P1C	P1B	TB33	TB36	P1E	P1D	TB35	TB38	P20	P1F	TB37	TB40	P22	P21	TB39	TB42	COM	P23	TB41
	TB2	485+	PX	TB1																																																																																					
	TB4	485-	TX	TB3																																																																																					
	TB6	P00	SG	TB5																																																																																					
	TB8	P02	P01	TB7																																																																																					
	TB10	P04	P03	TB9																																																																																					
	TB12	P06	P05	TB11																																																																																					
	TB14	P08	P07	TB13																																																																																					
	TB16	P0A	P09	TB15																																																																																					
	TB18	P00	P0B	TB17																																																																																					
	TB20	P0E	P0D	TB19																																																																																					
	TB22	P10	P0F	TB21																																																																																					
	TB24	P12	P11	TB23																																																																																					
	TB26	P14	P13	TB25																																																																																					
	TB28	P16	P15	TB27																																																																																					
	TB30	P18	P17	TB29																																																																																					
	TB32	P1A	P19	TB31																																																																																					
	TB34	P1C	P1B	TB33																																																																																					
	TB36	P1E	P1D	TB35																																																																																					
	TB38	P20	P1F	TB37																																																																																					
	TB40	P22	P21	TB39																																																																																					
	TB42	COM	P23	TB41																																																																																					
	TB4	485-	TB3	TX																																																																																					
TB6	00	TB5	SG																																																																																						
TB8	02	TB7	01																																																																																						
TB10	04	TB9	03																																																																																						
TB12	06	TB11	05																																																																																						
TB14	08	TB13	07																																																																																						
TB16	0A	TB15	09																																																																																						
TB18	0C	TB17	0B																																																																																						
TB20	0E	TB19	0D																																																																																						
TB22	10	TB21	0F																																																																																						
TB24	12	TB23	11																																																																																						
TB26	14	TB25	13																																																																																						
TB28	16	TB27	15																																																																																						
TB30	18	TB29	17																																																																																						
TB32	1A	TB31	19																																																																																						
TB34	1C	TB33	1B																																																																																						
TB36	1E	TB35	1D																																																																																						
TB38	20	TB37	1F																																																																																						
TB40	22	TB39	21																																																																																						
TB42	COM	TB41	23																																																																																						

Relay output wiring
(XBC-DR60SU/XEC-DR60SU)

Circuit configuration		No.	Contact	No.	Contact	Type																																																																																			
	TB2	FG	TB1	AG100	<table border="1"> <tr> <td>TB2</td> <td>485+</td> <td>PX</td> <td>TB1</td> </tr> <tr> <td>TB4</td> <td>485-</td> <td>TX</td> <td>TB3</td> </tr> <tr> <td>TB6</td> <td>P00</td> <td>SG</td> <td>TB5</td> </tr> <tr> <td>TB8</td> <td>P02</td> <td>P01</td> <td>TB7</td> </tr> <tr> <td>TB10</td> <td>P04</td> <td>P03</td> <td>TB9</td> </tr> <tr> <td>TB12</td> <td>P06</td> <td>P05</td> <td>TB11</td> </tr> <tr> <td>TB14</td> <td>P08</td> <td>P07</td> <td>TB13</td> </tr> <tr> <td>TB16</td> <td>P0A</td> <td>P09</td> <td>TB15</td> </tr> <tr> <td>TB18</td> <td>P00</td> <td>P0B</td> <td>TB17</td> </tr> <tr> <td>TB20</td> <td>P0E</td> <td>P0D</td> <td>TB19</td> </tr> <tr> <td>TB22</td> <td>P10</td> <td>P0F</td> <td>TB21</td> </tr> <tr> <td>TB24</td> <td>P12</td> <td>P11</td> <td>TB23</td> </tr> <tr> <td>TB26</td> <td>P14</td> <td>P13</td> <td>TB25</td> </tr> <tr> <td>TB28</td> <td>P16</td> <td>P15</td> <td>TB27</td> </tr> <tr> <td>TB30</td> <td>P18</td> <td>P17</td> <td>TB29</td> </tr> <tr> <td>TB32</td> <td>P1A</td> <td>P19</td> <td>TB31</td> </tr> <tr> <td>TB34</td> <td>P1C</td> <td>P1B</td> <td>TB33</td> </tr> <tr> <td>TB36</td> <td>P1E</td> <td>P1D</td> <td>TB35</td> </tr> <tr> <td>TB38</td> <td>P20</td> <td>P1F</td> <td>TB37</td> </tr> <tr> <td>TB40</td> <td>P22</td> <td>P21</td> <td>TB39</td> </tr> <tr> <td>TB42</td> <td>COM</td> <td>P23</td> <td>TB41</td> </tr> </table>	TB2	485+	PX	TB1	TB4	485-	TX	TB3	TB6	P00	SG	TB5	TB8	P02	P01	TB7	TB10	P04	P03	TB9	TB12	P06	P05	TB11	TB14	P08	P07	TB13	TB16	P0A	P09	TB15	TB18	P00	P0B	TB17	TB20	P0E	P0D	TB19	TB22	P10	P0F	TB21	TB24	P12	P11	TB23	TB26	P14	P13	TB25	TB28	P16	P15	TB27	TB30	P18	P17	TB29	TB32	P1A	P19	TB31	TB34	P1C	P1B	TB33	TB36	P1E	P1D	TB35	TB38	P20	P1F	TB37	TB40	P22	P21	TB39	TB42	COM	P23	TB41
	TB2	485+	PX	TB1																																																																																					
	TB4	485-	TX	TB3																																																																																					
	TB6	P00	SG	TB5																																																																																					
	TB8	P02	P01	TB7																																																																																					
	TB10	P04	P03	TB9																																																																																					
	TB12	P06	P05	TB11																																																																																					
	TB14	P08	P07	TB13																																																																																					
	TB16	P0A	P09	TB15																																																																																					
	TB18	P00	P0B	TB17																																																																																					
	TB20	P0E	P0D	TB19																																																																																					
	TB22	P10	P0F	TB21																																																																																					
	TB24	P12	P11	TB23																																																																																					
	TB26	P14	P13	TB25																																																																																					
	TB28	P16	P15	TB27																																																																																					
	TB30	P18	P17	TB29																																																																																					
	TB32	P1A	P19	TB31																																																																																					
	TB34	P1C	P1B	TB33																																																																																					
	TB36	P1E	P1D	TB35																																																																																					
	TB38	P20	P1F	TB37																																																																																					
	TB40	P22	P21	TB39																																																																																					
	TB42	COM	P23	TB41																																																																																					
	TB4	COM0	TB3	-240V																																																																																					
TB6	COM1	TB5	40																																																																																						
TB8	COM2	TB7	41																																																																																						
TB10	43	TB9	42																																																																																						
TB12	COM3	TB11	P																																																																																						
TB14	45	TB13	44																																																																																						
TB16	47	TB15	46																																																																																						
TB18	COM4	TB17	NC																																																																																						
TB20	49	TB19	48																																																																																						
TB22	4B	TB21	4A																																																																																						
TB24	COM5	TB23	NC																																																																																						
TB26	4D	TB25	4C																																																																																						
TB28	4F	TB27	4E																																																																																						
TB30	COM6	TB29	NC																																																																																						
TB32	51	TB31	50																																																																																						
TB34	53	TB33	52																																																																																						
TB36	COM7	TB35	NC																																																																																						
TB38	55	TB37	54																																																																																						
TB40	57	TB39	56																																																																																						
TB42	24G	TB41	24V																																																																																						

XGB Wiring | Block type unit

Economic type

Input wiring (XBC-DR10E)

Circuit configuration		No.	Contact	No.	Contact	Type																								
		TB2	485+	TB1	RX	<table border="1"> <tr><td>+</td><td>RX</td><td>TB1</td></tr> <tr><td>+</td><td>TX</td><td>TB3</td></tr> <tr><td>+</td><td>SG</td><td>TB5</td></tr> <tr><td>+</td><td>P00</td><td>TB7</td></tr> <tr><td>+</td><td>P02</td><td>TB9</td></tr> <tr><td>+</td><td>P04</td><td>TB11</td></tr> <tr><td>+</td><td>NC</td><td>TB13</td></tr> <tr><td>+</td><td>COM</td><td>TB14</td></tr> </table>	+	RX	TB1	+	TX	TB3	+	SG	TB5	+	P00	TB7	+	P02	TB9	+	P04	TB11	+	NC	TB13	+	COM	TB14
		+	RX	TB1																										
		+	TX	TB3																										
		+	SG	TB5																										
		+	P00	TB7																										
		+	P02	TB9																										
		+	P04	TB11																										
		+	NC	TB13																										
		+	COM	TB14																										
		TB4	485-	TB3	TX																									
		TB6	00	TB5	SG																									
		TB8	02	TB7	01																									
		TB10	04	TB9	03																									
		TB12	NC	TB11	05																									
TB14	COM	TB13	NC																											

Relay output wiring (XBC-DR10E)

Circuit configuration		No.	Contact	No.	Contact	Type																								
		TB2	FG	TB1	AC100	<table border="1"> <tr><td>+</td><td>AC100</td><td>TB1</td></tr> <tr><td>+</td><td>~240V</td><td>TB3</td></tr> <tr><td>+</td><td>P40</td><td>TB5</td></tr> <tr><td>+</td><td>P41</td><td>TB7</td></tr> <tr><td>+</td><td>P42</td><td>TB9</td></tr> <tr><td>+</td><td>NC</td><td>TB11</td></tr> <tr><td>+</td><td>24V</td><td>TB13</td></tr> <tr><td>+</td><td>24G</td><td>TB14</td></tr> </table>	+	AC100	TB1	+	~240V	TB3	+	P40	TB5	+	P41	TB7	+	P42	TB9	+	NC	TB11	+	24V	TB13	+	24G	TB14
		+	AC100	TB1																										
		+	~240V	TB3																										
		+	P40	TB5																										
		+	P41	TB7																										
		+	P42	TB9																										
		+	NC	TB11																										
		+	24V	TB13																										
		+	24G	TB14																										
		TB4	COM0	TB5	40																									
		TB6	COM1	TB7	41																									
		TB8	COM2	TB9	42																									
		TB10	43	TB11	NC																									
		TB12	NC	TB13	24V																									
TB14	24G																													

Input wiring (XBC-DR14E)

Circuit configuration		No.	Contact	No.	Contact	Type																								
		TB2	485+	TB1	RX	<table border="1"> <tr><td>+</td><td>RX</td><td>TB1</td></tr> <tr><td>+</td><td>TX</td><td>TB3</td></tr> <tr><td>+</td><td>SG</td><td>TB5</td></tr> <tr><td>+</td><td>P01</td><td>TB7</td></tr> <tr><td>+</td><td>P03</td><td>TB9</td></tr> <tr><td>+</td><td>P05</td><td>TB11</td></tr> <tr><td>+</td><td>P07</td><td>TB13</td></tr> <tr><td>+</td><td>COM</td><td>TB14</td></tr> </table>	+	RX	TB1	+	TX	TB3	+	SG	TB5	+	P01	TB7	+	P03	TB9	+	P05	TB11	+	P07	TB13	+	COM	TB14
		+	RX	TB1																										
		+	TX	TB3																										
		+	SG	TB5																										
		+	P01	TB7																										
		+	P03	TB9																										
		+	P05	TB11																										
		+	P07	TB13																										
		+	COM	TB14																										
		TB4	485-	TB3	TX																									
		TB6	00	TB5	SG																									
		TB8	02	TB7	01																									
		TB10	04	TB9	03																									
		TB12	06	TB11	05																									
TB14	08	TB13	07																											

Relay output wiring (XBC-DR14E)

Circuit configuration		No.	Contact	No.	Contact	Type																								
		TB2	FG	TB1	AC100	<table border="1"> <tr><td>+</td><td>AC100</td><td>TB1</td></tr> <tr><td>+</td><td>~240V</td><td>TB3</td></tr> <tr><td>+</td><td>P40</td><td>TB5</td></tr> <tr><td>+</td><td>P41</td><td>TB7</td></tr> <tr><td>+</td><td>P42</td><td>TB9</td></tr> <tr><td>+</td><td>NC</td><td>TB11</td></tr> <tr><td>+</td><td>24V</td><td>TB13</td></tr> <tr><td>+</td><td>24G</td><td>TB14</td></tr> </table>	+	AC100	TB1	+	~240V	TB3	+	P40	TB5	+	P41	TB7	+	P42	TB9	+	NC	TB11	+	24V	TB13	+	24G	TB14
		+	AC100	TB1																										
		+	~240V	TB3																										
		+	P40	TB5																										
		+	P41	TB7																										
		+	P42	TB9																										
		+	NC	TB11																										
		+	24V	TB13																										
		+	24G	TB14																										
		TB4	COM0	TB5	40																									
		TB6	COM1	TB7	41																									
		TB8	COM2	TB9	42																									
		TB10	43	TB11	NC																									
		TB12	NC	TB13	24V																									
TB14	24G																													

Input wiring (XBC-DR20E)

Circuit configuration		No.	Contact	No.	Contact	Type																																							
		TB2	485+	TB1	RX	<table border="1"> <tr><td>+</td><td>RX</td><td>TB1</td></tr> <tr><td>+</td><td>TX</td><td>TB3</td></tr> <tr><td>+</td><td>SG</td><td>TB5</td></tr> <tr><td>+</td><td>P01</td><td>TB7</td></tr> <tr><td>+</td><td>P03</td><td>TB9</td></tr> <tr><td>+</td><td>P05</td><td>TB11</td></tr> <tr><td>+</td><td>P07</td><td>TB13</td></tr> <tr><td>+</td><td>P09</td><td>TB15</td></tr> <tr><td>+</td><td>POB</td><td>TB17</td></tr> <tr><td>+</td><td>NC</td><td>TB19</td></tr> <tr><td>+</td><td>NC</td><td>TB21</td></tr> <tr><td>+</td><td>NC</td><td>TB23</td></tr> <tr><td>+</td><td>COM</td><td>TB24</td></tr> </table>	+	RX	TB1	+	TX	TB3	+	SG	TB5	+	P01	TB7	+	P03	TB9	+	P05	TB11	+	P07	TB13	+	P09	TB15	+	POB	TB17	+	NC	TB19	+	NC	TB21	+	NC	TB23	+	COM	TB24
		+	RX	TB1																																									
		+	TX	TB3																																									
		+	SG	TB5																																									
		+	P01	TB7																																									
		+	P03	TB9																																									
		+	P05	TB11																																									
		+	P07	TB13																																									
		+	P09	TB15																																									
		+	POB	TB17																																									
		+	NC	TB19																																									
		+	NC	TB21																																									
		+	NC	TB23																																									
		+	COM	TB24																																									
		TB4	485-	TB3	TX																																								
		TB6	00	TB5	SG																																								
		TB8	02	TB7	01																																								
		TB10	04	TB9	03																																								
		TB12	06	TB11	05																																								
		TB14	08	TB13	07																																								
		TB16	0A	TB15	09																																								
		TB18	NC	TB17	0B																																								
		TB20	NC	TB19	NC																																								
		TB22	NC	TB21	NC																																								
TB24	COM	TB23	NC																																										

Relay output wiring
(XBC-DR20E)

Circuit configuration		No.	Contact	No.	Contact	Type																																							
	TB2	FG	TB1	AC100	<table border="1"> <tr> <td rowspan="2">+</td> <td>AC100</td> <td>TB1</td> </tr> <tr> <td>~240V</td> <td>TB3</td> </tr> <tr> <td rowspan="2">-</td> <td>40</td> <td>TB5</td> </tr> <tr> <td>41</td> <td>TB7</td> </tr> <tr> <td rowspan="2">-</td> <td>42</td> <td>TB9</td> </tr> <tr> <td>NC</td> <td>TB11</td> </tr> <tr> <td rowspan="2">-</td> <td>44</td> <td>TB13</td> </tr> <tr> <td>46</td> <td>TB15</td> </tr> <tr> <td rowspan="2">-</td> <td>48</td> <td>TB17</td> </tr> <tr> <td>NC</td> <td>TB19</td> </tr> <tr> <td rowspan="2">-</td> <td>4A</td> <td>TB21</td> </tr> <tr> <td>24V</td> <td>TB23</td> </tr> <tr> <td rowspan="2">+</td> <td>24V</td> <td>TB24</td> </tr> <tr> <td>+</td> <td></td> <td></td> </tr> </table>	+	AC100	TB1	~240V	TB3	-	40	TB5	41	TB7	-	42	TB9	NC	TB11	-	44	TB13	46	TB15	-	48	TB17	NC	TB19	-	4A	TB21	24V	TB23	+	24V	TB24	+			TB4	COM0	TB5	40
	+	AC100	TB1																																										
		~240V	TB3																																										
	-	40	TB5																																										
		41	TB7																																										
	-	42	TB9																																										
		NC	TB11																																										
	-	44	TB13																																										
		46	TB15																																										
	-	48	TB17																																										
		NC	TB19																																										
	-	4A	TB21																																										
		24V	TB23																																										
	+	24V	TB24																																										
		+																																											
	TB6	COM1	TB7	41																																									
	TB8	COM2	TB9	42																																									
	TB10	43	TB11	NC																																									
	TB12	COM3	TB13	44																																									
	TB14	45	TB15	46																																									
	TB16	47	TB17	NC																																									
	TB18	COM4	TB19	48																																									
	TB20	49	TB21	4A																																									
	TB22	4B	TB23	24V																																									
TB24	24G	TB24	24G																																										

Input wiring
(XBC-DR30E)

Circuit configuration		No.	Contact	No.	Contact	Type																																							
	TB2	485+	TB1	RX	<table border="1"> <tr> <td rowspan="2">+</td> <td>RX</td> <td>TB1</td> </tr> <tr> <td>TX</td> <td>TB3</td> </tr> <tr> <td rowspan="2">-</td> <td>SG</td> <td>TB5</td> </tr> <tr> <td>01</td> <td>TB7</td> </tr> <tr> <td rowspan="2">-</td> <td>03</td> <td>TB9</td> </tr> <tr> <td>05</td> <td>TB11</td> </tr> <tr> <td rowspan="2">-</td> <td>07</td> <td>TB13</td> </tr> <tr> <td>09</td> <td>TB15</td> </tr> <tr> <td rowspan="2">-</td> <td>0B</td> <td>TB17</td> </tr> <tr> <td>0D</td> <td>TB19</td> </tr> <tr> <td rowspan="2">-</td> <td>0F</td> <td>TB21</td> </tr> <tr> <td>11</td> <td>TB23</td> </tr> <tr> <td rowspan="2">+</td> <td></td> <td>TB24</td> </tr> <tr> <td>+</td> <td></td> <td></td> </tr> </table>	+	RX	TB1	TX	TB3	-	SG	TB5	01	TB7	-	03	TB9	05	TB11	-	07	TB13	09	TB15	-	0B	TB17	0D	TB19	-	0F	TB21	11	TB23	+		TB24	+			TB4	485-	TB5	SG
	+	RX	TB1																																										
		TX	TB3																																										
	-	SG	TB5																																										
		01	TB7																																										
	-	03	TB9																																										
		05	TB11																																										
	-	07	TB13																																										
		09	TB15																																										
	-	0B	TB17																																										
		0D	TB19																																										
	-	0F	TB21																																										
		11	TB23																																										
	+		TB24																																										
		+																																											
	TB6	00	TB7	01																																									
	TB8	02	TB9	03																																									
	TB10	04	TB11	05																																									
	TB12	06	TB13	07																																									
	TB14	08	TB15	09																																									
	TB16	0A	TB17	0B																																									
	TB18	0C	TB19	0D																																									
	TB20	0E	TB21	0F																																									
	TB22	10	TB23	11																																									
TB24	COM	TB24	COM																																										

Relay output wiring
(XBC-DR30E)

Circuit configuration		No.	Contact	No.	Contact	Type																																							
	TB2	FG	TB1	AC100	<table border="1"> <tr> <td rowspan="2">+</td> <td>AC100</td> <td>TB1</td> </tr> <tr> <td>~240V</td> <td>TB3</td> </tr> <tr> <td rowspan="2">-</td> <td>40</td> <td>TB5</td> </tr> <tr> <td>41</td> <td>TB7</td> </tr> <tr> <td rowspan="2">-</td> <td>42</td> <td>TB9</td> </tr> <tr> <td>NC</td> <td>TB11</td> </tr> <tr> <td rowspan="2">-</td> <td>44</td> <td>TB13</td> </tr> <tr> <td>46</td> <td>TB15</td> </tr> <tr> <td rowspan="2">-</td> <td>48</td> <td>TB17</td> </tr> <tr> <td>NC</td> <td>TB19</td> </tr> <tr> <td rowspan="2">-</td> <td>4A</td> <td>TB21</td> </tr> <tr> <td>24V</td> <td>TB23</td> </tr> <tr> <td rowspan="2">+</td> <td>24V</td> <td>TB24</td> </tr> <tr> <td>+</td> <td></td> <td></td> </tr> </table>	+	AC100	TB1	~240V	TB3	-	40	TB5	41	TB7	-	42	TB9	NC	TB11	-	44	TB13	46	TB15	-	48	TB17	NC	TB19	-	4A	TB21	24V	TB23	+	24V	TB24	+			TB4	COM0	TB5	40
	+	AC100	TB1																																										
		~240V	TB3																																										
	-	40	TB5																																										
		41	TB7																																										
	-	42	TB9																																										
		NC	TB11																																										
	-	44	TB13																																										
		46	TB15																																										
	-	48	TB17																																										
		NC	TB19																																										
	-	4A	TB21																																										
		24V	TB23																																										
	+	24V	TB24																																										
		+																																											
	TB6	COM1	TB7	41																																									
	TB8	COM2	TB9	42																																									
	TB10	43	TB11	NC																																									
	TB12	COM3	TB13	44																																									
	TB14	45	TB15	46																																									
	TB16	47	TB17	NC																																									
	TB18	COM4	TB19	48																																									
	TB20	49	TB21	4A																																									
	TB22	4B	TB23	24V																																									
TB24	24G	TB24	24G																																										

Standard type

Input wiring (XBM-DR16S)

Circuit configuration		No.	Contact	Type
	TB1	00		
	TB2	01		
	TB3	02		
	TB4	03		
	TB5	04		
	TB6	05		
	TB7	06		
	TB8	07		
	TB9	COM		

Relay output wiring (XBM-DR16S)

Circuit configuration		No.	Contact	Type
	TB1	20		
	TB2	21		
	TB3	22		
	TB4	23		
	TB5	24		
	TB6	25		
	TB7	26		
	TB8	27		
	TB9	COM		

Input wiring (XBM-DN16S)

Circuit configuration		No.	Contact	No.	Contact	Type
	B10	00	A10	NC		
	B09	01	A09	NC		
	B08	02	A08	NC		
	B07	03	A07	NC		
	B06	04	A06	NC		
	B05	05	A05	NC		
	B04	06	A04	NC		
	B03	07	A03	NC		
	B02	COM	A02	NC		
	B01	COM	A01	NC		

Transistor output wiring
(XBM-DN16S)

Circuit configuration		No.	Contact	Type
	B10	20		
	B09	21		
	B08	22		
	B07	23		
	B06	24		
	B05	25		
	B04	26		
	B03	27		
	B02	DC12/24V		
	B01	24V		
	A10	NC		
	A09	NC		
	A08	NC		
	A07	NC		
	A06	NC		
	A05	NC		
A04	NC			
A03	NC			
A02	COM			
A01	COM			

Input wiring
(XBM-DN32S)

Circuit configuration		No.	Contact	No.	Contact	Type
	B10	00	A10	08		
	B09	01	A09	09		
	B08	02	A08	0A		
	B07	03	A07	0B		
	B06	04	A06	0C		
	B05	05	A05	0D		
	B04	06	A04	0E		
	B03	07	A03	0F		
	B02	COM	A02	COM		
	B01	COM	A01	COM		

Transistor output wiring
(XBM-DN32S)

Circuit configuration		No.	Contact	Type
	B10	20		
	B09	21		
	B08	22		
	B07	23		
	B06	24		
	B05	25		
	B04	26		
	B03	27		
	B02	DC12/24V		
	B01	24V		
	A10	28		
	A09	29		
	A08	2A		
	A07	2B		
	A06	2C		
	A05	2D		
A04	2E			
A03	2F			
A02	COM			
A01	COM			

Standard type

Performance specifications

Classification		Description			
		Block type unit			Modular type
		H-type	S(U)-type	E-type	S-type
Count input Signal	Signal	A-phase, B-phase			
	Input type	Voltage input (Open collector)			
	Signal level	DC 24V			
Max. count speed		100kpps	100kpps	4kpps	20kpps
Number of channels	1 phase	100kpps 4ch / 20kpps 4ch	100kpps 2ch / 20kpps 6ch	4kpps 4ch	20kpps 4ch
	2 phase	50kpps 2ch / 10kpps 2ch	50kpps 1ch	2kpps 2ch	2 multiplication: 10kpps
		50kpps 2ch / 8kpps 2ch	8kpps 3ch		4 multiplication: 8kpps
Count range		Signed 32bit (-2,147,483,648 ~ 2,147,483,647)			
Count mode (Program setting)		Linear count (if 32bit range exceeded, Carry / Borrow occurs) Ring count (repeated count within setting range)			
Input mode (Program setting)		1-phase input 2-phase input CW/CCW input			
Signal type		Voltage			
Up/Down setting	1 phase input	Increasing / decreasing operation setting by B-phase input Increasing/decreasing operation setting by program			
	2 phase input	Automatic setting by difference in phase			
	CW/CCW	A-phase input: increasing operation B-phase input: decreasing operation			
Multiplication function	1 phase input	1 multiplication			
	2 phase input	4 multiplication			
	CW/CCW	1 multiplication			
Control input	Signal	Preset instruction input			
	Signal level	DC 24V input type			
	Signal type	Voltage			
External output	Output points	2 point/channel (for each channel): output contact point of basic unit available		1 point/channel (for each channel): output contact point of basic unit available	
	Type	Select program setting, signal-compared (>, >=, =, <=, <) or section compared output (included or excluded)			
	Output Type	Relay, Open-collector output (Sink)			
Count enable		To be set through program			
Preset function		To be set through terminal (contact) or program			
Auxiliary mode		Count latch			

Input specification

Item	Description
Input voltage	24V DC (20.4V ~ 28.8V)
Input current	4mA
On voltage (min.)	20.4V
Off voltage (max.)	6V

Parts designation | Block type unit

High performance type (XBC-H)

Terminal No.	Names		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch4 counter input	Ch4 A-phase input	Counter input terminal	A-phase input
P005	Ch5 counter input	Ch4 B-phase input	Counter input terminal	B-phase input
P006	Ch6 counter input	Ch6 A-phase input	Counter input terminal	A-phase input
P007	Ch7 counter input	Ch6 B-phase input	Counter input terminal	B-phase input
P008	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P009	Ch1 preset 24V	-	Preset input terminal	No use
P00A	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P00B	Ch4 preset 24V	-	Preset input terminal	No use
P00C	Ch5 preset 24V	Ch4 preset 24V	Preset input terminal	Preset input terminal
P00D	Ch6 preset 24V	-	Preset input terminal	No use
P00E	Ch7 preset 24V	Ch6 preset 24V	Preset input terminal	Preset input terminal
P00F	Ch8 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Input common	Input common

High performance type (XEC-H)

Terminal No.	Names		Usage	
	1-phase	2-Phase	1-phase	2-Phase
IX0.0.0	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
IX0.0.1	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
IX0.0.2	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
IX0.0.3	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
IX0.0.4	Ch4 counter input	Ch4 A-phase input	Counter input terminal	A-phase input
IX0.0.5	Ch5 counter input	Ch4 B-phase input	Counter input terminal	B-phase input
IX0.0.6	Ch6 counter input	Ch6 A-phase input	Counter input terminal	A-phase input
IX0.0.7	Ch7 counter input	Ch6 B-phase input	Counter input terminal	B-phase input
IX0.0.8	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
IX0.0.9	Ch1 preset 24V	-	Preset input terminal	No use
IX0.0.10	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
IX0.0.11	Ch4 preset 24V	-	Preset input terminal	No use
IX0.0.12	Ch5 preset 24V	Ch4 preset 24V	Preset input terminal	Preset input terminal
IX0.0.13	Ch6 preset 24V	-	Preset input terminal	No use
IX0.0.14	Ch7 preset 24V	Ch6 preset 24V	Preset input terminal	Preset input terminal
IX0.0.15	Ch8 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Input common	Input common

Standard type

Terminal No.	Names		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch4 counter input	Ch4 A-phase input	Counter input terminal	A-phase input
P005	Ch5 counter input	Ch4 B-phase input	Counter input terminal	B-phase input
P006	Ch6 counter input	Ch6 A-phase input	Counter input terminal	A-phase input
P007	Ch7 counter input	Ch6 B-phase input	Counter input terminal	B-phase input
P008	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P009	Ch1 preset 24V	-	Preset input terminal	No use
P00A	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P00B	Ch4 preset 24V	-	Preset input terminal	No use
P00C	Ch5 preset 24V	Ch4 preset 24V	Preset input terminal	Preset input terminal
P00D	Ch6 preset 24V	-	Preset input terminal	No use
P00E	Ch7 preset 24V	Ch6 preset 24V	Preset input terminal	Preset input terminal
P00F	Ch8 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Input common	Input common

Parts designation | Block type unit

Economic type



Terminal No.	Names		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P005	Ch1 preset 24V	-	Preset input terminal	No use
P006	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P007	Ch4 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Common terminal	Common terminal

Parts designation | Modular type unit

Standard type

Terminal No.	Names		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P005	Ch1 preset 24V	-	Preset input terminal	No use
P006	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P007	Ch3 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Common terminal	Common terminal

Wiring

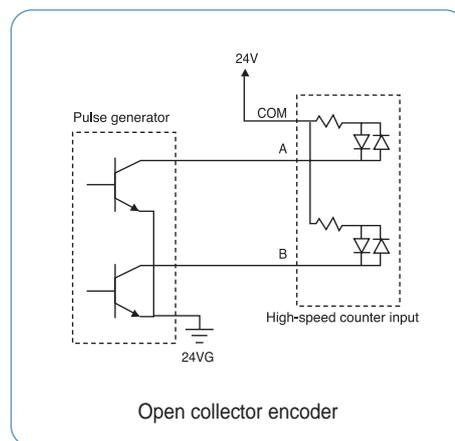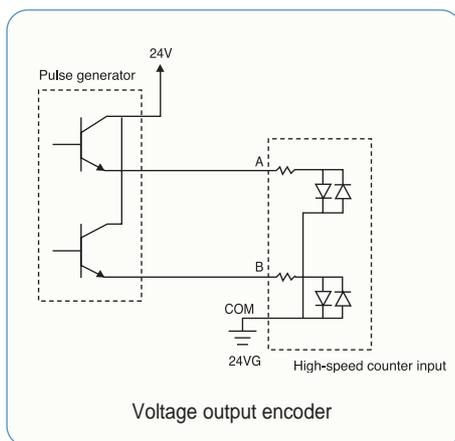


Performance specification

Classification	Description		
	Block type unit		Modular type
	H-type	S(U)-type	S-type
No. of control axis	2 axes		
Interpolation	2-axis linear interpolation		
Control mode	Position control, Speed control, Speed/Position switching control, Position/speed switching control		
Control unit	Pulse		
Positioning data	30-step pattern for each axis (XBC: 80step) (operation step number : 1~ 30, XBC : 1~ 80)		
Positioning monitor	Dedicated monitoring function for positioning in XG5000		
Back-up	Permanent Backup of downloaded parameter (FLASH memory)		
	2-month Super Cap.Backup of parameter/data modified during operation(XBM)Battery back-up (XBC)		
	Permanent Backup of parameter/data in RAM by instruction (FLASH memory)		
Positioning	Positioning method	Absolute / incremental method	
	Positioning range	-2,147,483,648 ~ 2,147,483,647	
	Speed range	1 ~ 100,000 (pulse/sec)	
	Acceleration / Deceleration type	Trapezoidal acceleration / deceleration	
	Acceleration / Deceleration time	1 ~ 10,000ms (4 patterns each can be set)	
Max. output pulse	100 Kpps		
Max. distance of connection	2m		

※ Economic block type unit (E-type) dose not support built-in Positioning functions

Electrical specification

Output	Signal	Rated input voltage	Load voltage range	Max. load current/inrush current	Max. voltage drop (On)	Leakage current (Off)	Response time
	Output pulse		DC 5~24V	DC 4.75~26.4V	100mA(1 point) 1A/10ms or less	DC 0.3V or less	0.1mA or less
Input	Signal	Rated input voltage/current	Load voltage range	On voltage/current	Off voltage/current	Input resistance	Response time
	External high limit	DC 24V/7mA	DC 20.4 ~ 28.8V	DC 19V/5.7mA or more	DC 6V/1.8mA or less	3.3 Ω	0.5ms or less
	External low limit			DC 19V/3.4mA or more	DC 6V/1.1mA or less		
	Approximate zero	DC 24V/4mA				5.6 Ω	
zero							

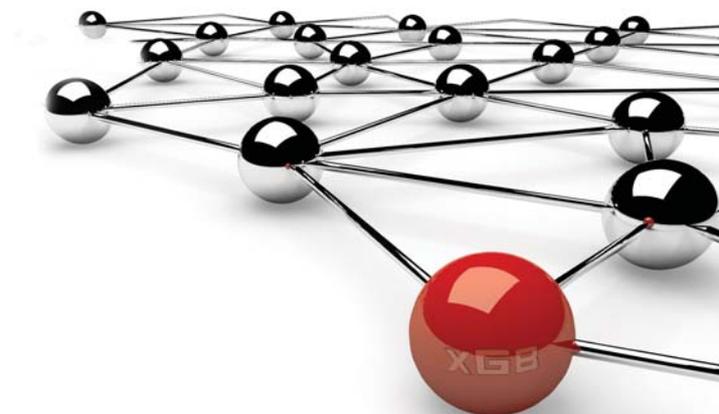

I/O specifications | Block type unit

High performance type (XBC-H/XEC-H)

Item	XBC pin number (XEC pin number)		Signal name		Direction of positioning signal to external	Operating condition
	X axis	Y axis				
Input	P00008 (%IX0.0.8)	P0000A (%IX0.0.10)	Limit L	Low limit	←	4mA / 24V
	P00009 (%IX0.0.9)	P0000B (%IX0.0.11)	Limit H	High limit	←	
	P0000C (%IX0.0.12)	P0000E (%IX0.0.14)	DOG	Near point	←	
	P0000D (%IX0.0.13)	P0000F (%IX0.0.15)	Origin	Zero signal (+24V)	←	
	COM		Input COM	Common	←	
Output	P00020 (%QX0.0.0)	P00021 (%QX0.0.1)	Pulse	Pulse/CW (Open collector)	→	DC5~24V
	P00022 (%QX0.0.2)	P00023 (%QX0.0.3)	Direction	Direction/CCW (Open collector)	→	
	P		DC12V	External power supply	→	
	COM 0 ~ 3		Output COM	External 24V GND	→	

Standard type (XBC-S(U))

Item	XBC pin number		Signal name		Direction of positioning signal to external	Operating condition
	X axis	Y axis				
Input	P00008 (%IX0.0.8)	P0000A (%IX0.0.10)	Limit L	Low limit	←	4mA / 24V
	P00009 (%IX0.0.9)	P0000B (%IX0.0.11)	Limit H	High limit	←	
	P0000C (%IX0.0.12)	P0000E (%IX0.0.14)	DOG	Near point	←	
	P0000D (%IX0.0.13)	P0000F (%IX0.0.15)	Origin	Zero signal (+24V)	←	
	COM		Input COM	Common	←	
Output	P00040 (%QX0.0.0)	P00041 (%QX0.0.1)	Pulse	Pulse/CW (Open collector)	→	DC5~24V
	P00042 (%QX0.0.2)	P00043 (%QX0.0.3)	Direction	Direction/CCW (Open collector)	→	
	P		DC12V	External power supply	→	
	COM 0~3		Output COM	External 24V GND	→	

I/O specifications | Modular type unit

Standard type

Item	XBM pin number		Signal name		Direction of positioning signal to external	Operating condition
	X axis	Y axis				
Input	P00000	P00002	Limit L	Low limit	←	Edge
	P00001	P00003	Limit H	High limit	←	Edge
	P00004	P00006	DOG	Near point	←	Edge
	P00005	P00007	Origin	Zero signal (+24V)	←	Edge
	COM		Input COM	Common	←	-
Output	P00020	P00021	Pulse	Pulse/CW (Open collector)	→	-
	P00022	P00023	Direction	Direction/CCW (Open collector)	→	-
	12/24V		DC12/24V	External power supply	→	-
	COM		Output COM	External 24V GND	→	-


Performance specification
(PID)

Classification		Description		
		Block type unit		Modular type
		H-type	S(U)-type	S-type
No. of control loop		16-loop independent control		
Control mode		P control, PI control, PD control, PID control		
Control period		10ms ~ 6,563.5ms (Setting unit: 0.1ms)		
Function	Forward/Reverse Mixed control	Switching control direction automatically when exceeding dead band		
	Cascade	Improved control precision by serial connection between Master loop and Slave loop		
	SV Ramp	Preventing overload caused by excessive SV change by setting variation slope		
	Alarm	Improved control stability with various alarm function such as MV high limit/low limit, PV high limit/low limit, PV variation width		
	Auto tuning	Auto tuning with improved auto-tuning algorithm		
Additional function		PWM output, PV Tracking, ΔMV, ΔPV, etc		

* Economic block type unit (E-type) dose not support built-in PID functions

Pulse catch


When the On-condition time of input signal is shorter than 1 scan time (Min. 50μs), Pulse catch processes the input signal as normal input.

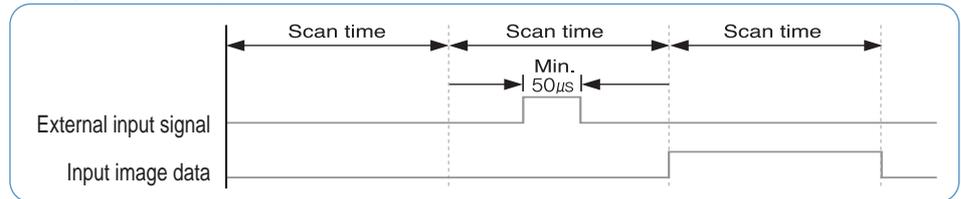

Item	Description			
	Block type unit			Modular type
	H-type	S(U)-type	E-type	S-type
Pulse catch	10μs: 4 points (P00000 ~ P00003) 50μs: 4 points (P00004 ~ P00007)	10μs: 2 points (P00000 ~ P00001) 50μs: 6 points (P00002 ~ P00007)	50μs: 4 points (P00000 ~ P00003)	50μs: 8 points (P00000 ~ P00007)

Input filter

Input filter prevents processing of the input signal that is shorter than the filtering time. (Filtering time is set by parameter) In the application site where noise is frequently generated, input filter prevents wrong input caused by noise.

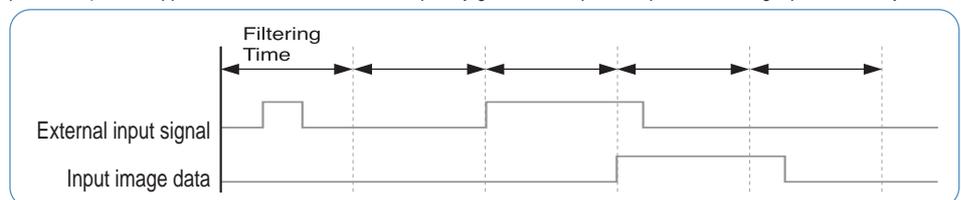

Classification	Description			
	Block type unit			Modular type
	H-type	S(U)-type	E-type	S-type
No. of setting points	Every input contact			
Input filtering time setting	Assigning for each module			
Setting range	1 ~ 100ms (1,3,5,10,20,70,100)			

Task

Task function is the processing method of internal/external signal generated periodically or aperiodically. It stops operation of scan program for the moment and then execute the assigned task.

Classification	Description			
	Block type unit			Modular type
	H-type	S(U)-type	E-type	S-type
Initial task	1(_INT)			
Cyclic task	8			
I/O task	8	8	4	8
Internal device task	8			
External interrupt	10 μ s: 4 points (P00000~P00003) 50 μ s: 4 points (P00004~P00007)	10 μ s: 2 points (P00000~P00001) 50 μ s: 6 points (P00002~P00007)	50 μ s: 4 points (P00000~P00003)	50 μ s: 8 points (P00000~P00007)


RTC

RTC function is for time management of system and error log. RTC function is executed steadily when power is off or instantaneous power cut status. Current time of RTC is renewed every scan by system operation status information flag.

Classification	Description			
	Block type unit			Modular type
	H-type	S(U)-type	E-type	S-type
RTC	Built-in	Option module	Option module	Not available




Specification

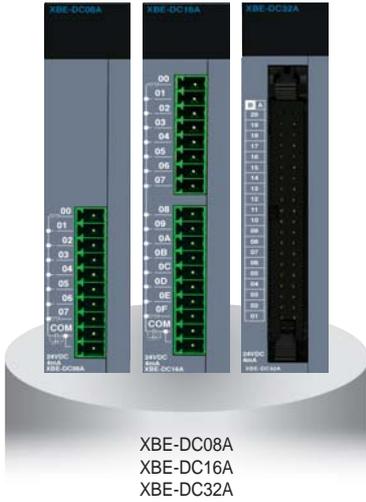

Specification	Model	XBE-DC08A	XBE-DC16A	XBE-DC32A
Input point		8 points	16 points	32 points
Rated input voltage / current		DC 24V / 4mA		
Operation voltage range		DC 20.4 ~ 28.8V (Ripple rate < 5%)		
Input resistance		5.6kΩ		
Response time	Off → On	1 / 3 / 5 / 10 / 20 / 70 / 100ms (setting by CPU parameter) Initial value: 3ms		
	On → Off			
Insulation pressure		AC 560Vrms / 3 Cycle (altitude 2000m)		
Insulation resistance		10MΩ or more by megger		
COMMON method		8 points / COM	16 points / COM	32 points / COM
Internal current consumption		30mA	40mA	50mA


Wiring

[XBE-DC08A / DC16A]

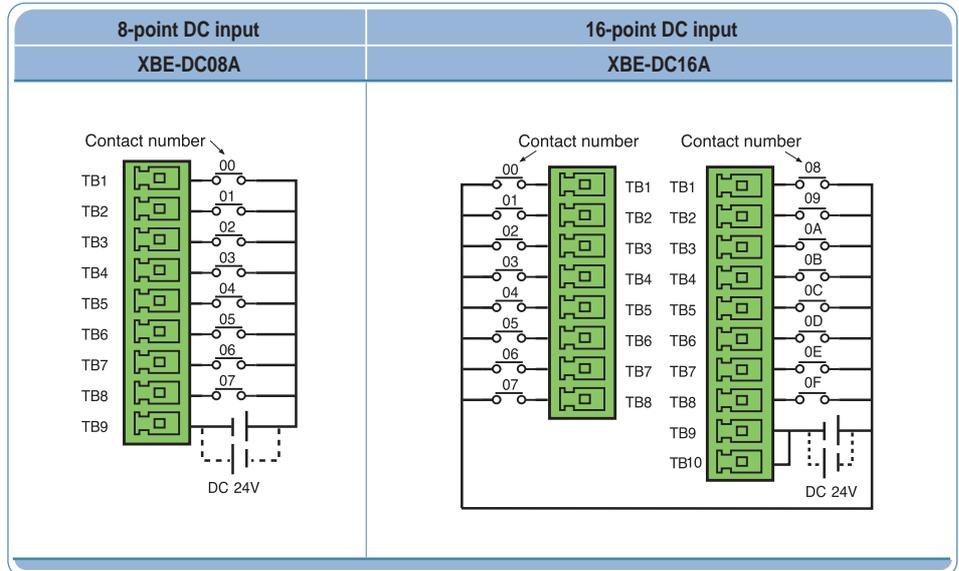


XGB Expansion | DC Input

Wiring (XBE-DC32A)

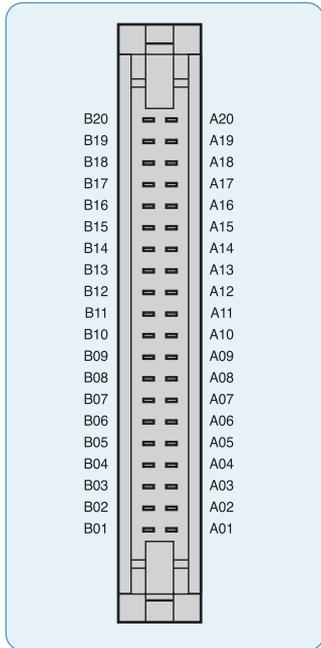


		PLC		Smart Link	
Pin number		XBE-DC32A		SLP-T40P	
B20	A20	00	10	A1	A11
B19	A19	01	11	B1	B11
B18	A18	02	12	A2	A12
B17	A17	03	13	B2	B12
B16	A16	04	14	A3	A13
B15	A15	05	15	B3	B13
B14	A14	06	16	A4	A14
B13	A13	07	17	B4	B14
B12	A12	08	18	A5	A15
B11	A11	09	19	B5	B15
B10	A10	0A	1A	A6	A16
B09	A09	0B	1B	B6	B16
B08	A08	0C	1C	A7	A17
B07	A07	0D	1D	B7	B17
B06	A06	0E	1E	A8	A18
B05	A05	0F	1F	B8	B18
B04	A04	NC	NC	A9	A19
B03	A03	NC	NC	B9	B19
B02	A02	COM	COM	A10	A20
B01	A01			B10	B20

Input wiring with Smart Link (XBE-DC32A)

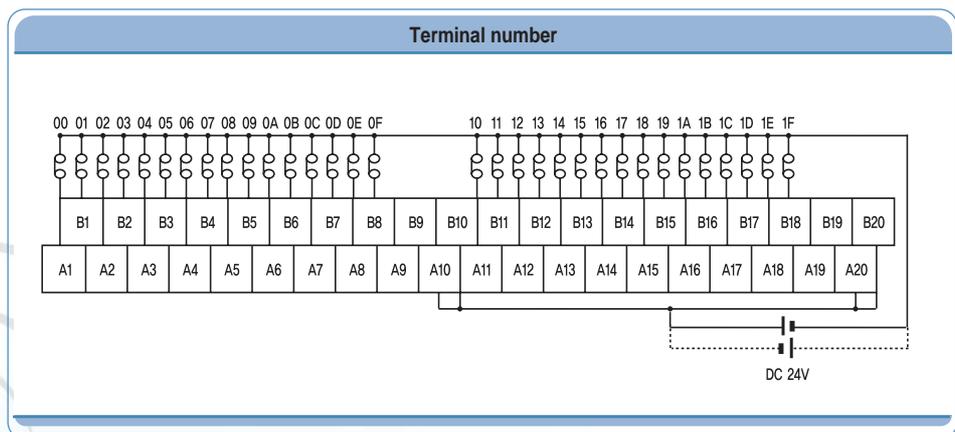


Specification

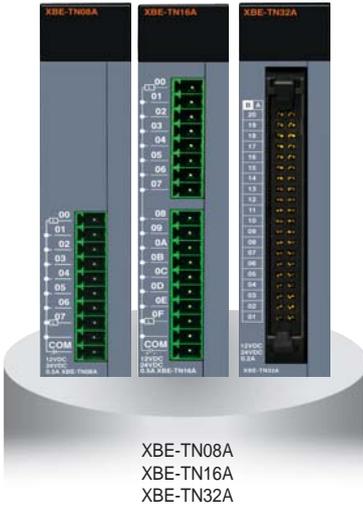

Specification	Model	XBE-TN08A	XBE-TP08A	XBE-TN16A	XBE-TP16A	XBE-TN32A	XBE-TP32A
Type		Sink	Source	Sink	Source	Sink	Source
Output point		8 point		16 point		32 point	
Rated load voltage		DC 12 / 24V					
Load voltage range		DC 10.2 ~ 26.4 V					
Max. load current		0.2A / 1point		0.2A / 1point, 2A / COM			
Off leakage current		0.1mA or less					
Max. voltage drop (On)		DC 0.4V					
Response time	Off → On	1mA or less					
	On → Off	1mA or less (Rated load, resistive load)					
Common method		8 points / COM		16 points / COM		32 points / COM	
Internal current consumption		40mA		60mA		120mA	
External Power supply	Voltage	DC 12 / 24V ± 10% (Ripple voltage ≤ 4 Vp-p)					
	Current	10mA or less (DC 24V connection)				20mA or less (DC 24V connection)	


Wiring

(XBE-TN08A / TN16A)

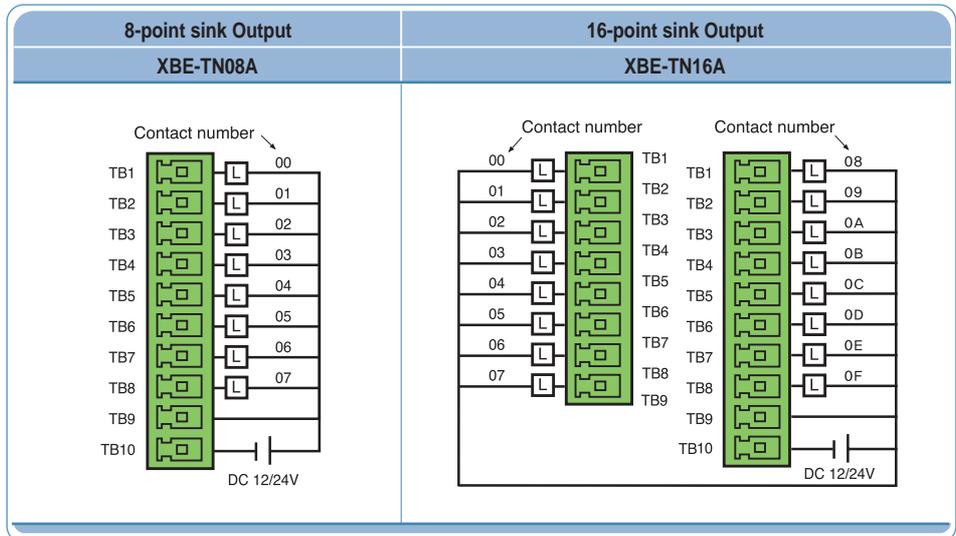

Wiring


(XBE-TN32A)

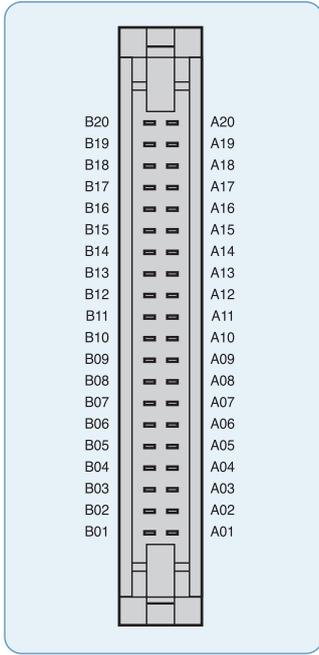

PLC				Smart Link	
Pin number		XBE-DC32A		SLP-T40P	
B20	A20	00	10	A1	A11
B19	A19	01	11	B1	B11
B18	A18	02	12	A2	A12
B17	A17	03	13	B2	B12
B16	A16	04	14	A3	A13
B15	A15	05	15	B3	B13
B14	A14	06	16	A4	A14
B13	A13	07	17	B4	B14
B12	A12	08	18	A5	A15
B11	A11	09	19	B5	B15
B10	A10	0A	1A	A6	A16
B09	A09	0B	1B	B6	B16
B08	A08	0C	1C	A7	A17
B07	A07	0D	1D	B7	B17
B06	A06	0E	1E	A8	A18
B05	A05	0F	1F	B8	B18
B04	A04	NC	NC	A9	A19
B03	A03	NC	NC	B9	B19
B02	A02	DC 12 / 24V	COM	A10	A20
B01	A01			B10	B20


SLP-T40P Output wiring

(XBE-TN32A)

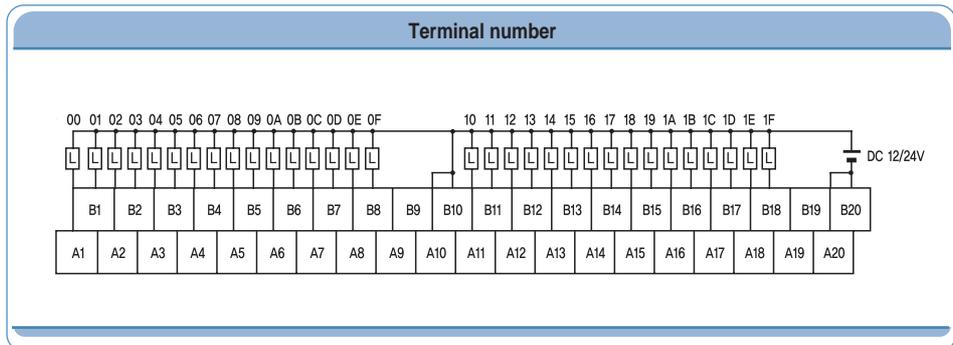


SLP-RY4A Output wiring

(XBE-TN32A)

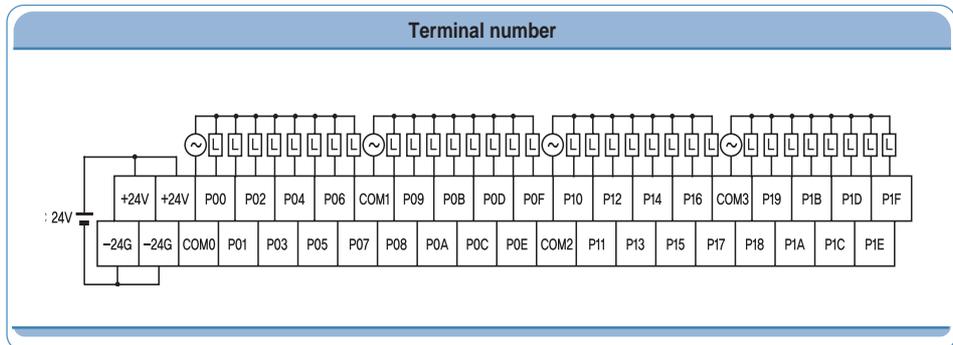


Specification

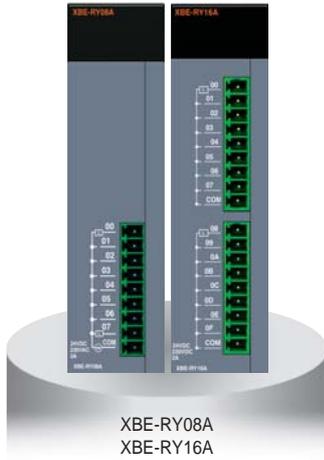


Model		XBE-RY08A	XBE-RY16A
Specification			
Output point		8 points	16 points
Insulation method		Relay insulation	
Rated input voltage / current		DC 24V 2A (resistive load) / AC 220V 2A (COS ψ = 1), 5A /COM	
Min. load voltage / current		DC5V 1mA	
Max. load voltage		AC 250V, DC 125V	
Off leakage current		0.1mA (AC 220V, 60Hz)	
Max. on / off frequency		3,600 times / hr	
Surge absorber		None	
Service life	Mechanical	20million times or more	
	Electrical	Rated load voltage / current 100,000 times or more	
		AC 200V / 1.5A, AC 240V / 1A (COS ψ = 0.7) 100,000 times or more AC 200V / 1A, AC 240V / 0.5 (COS ψ = 0.35) 100,000 tiems or more DC 24V / 1A, DC 100V / 0.1A (L / R = 7ms) 100,000 times or more	
Response time	Off \rightarrow On	10ms or less	
	On \rightarrow Off	12ms or less	
COMMON method		8 points / 1COM	
Internal current consumption		230mA	420mA
Operation indicator		Output On, LED On	
External connection method		9-pin terminal block connector	9-pin terminal block connector \times 2

Wiring

(XBE-RY08A / RY16A)

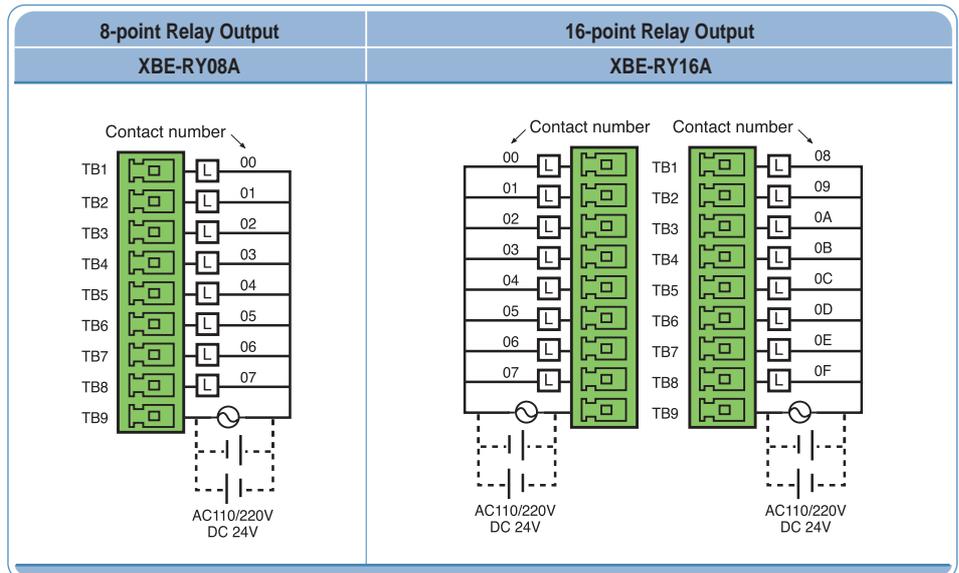

DC Input specification

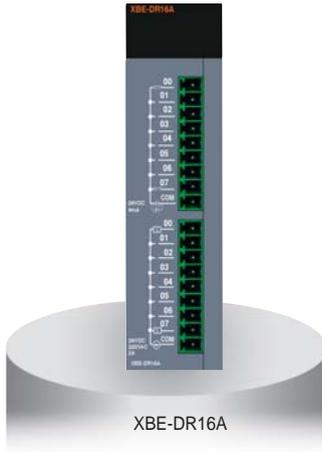


Relay output specification


Specification	Model	DC Input (XBE-DR16A)
Input point		8 points
Insulation method		Photo coupler
Rated input voltage		DC24V
Rated input current		4mA
Operation voltage range		DC20.4 ~ 28.8V (Ripple rate < 5%)
On voltage / On current		DC19V or more / 3mA or more
Off voltage / Off current		DC6V or less / 1mA or less
Input resistance		5.6kΩ
Response time	Off → On On → Off	1 / 3 / 5 / 10 / 20 / 70 / 100ms (setting by CPU parameter) init value: 3ms
COMMON method		8 points / COM
Weight		81g

Specification	Model	Relay output (XBE-DR16A)
Output point		8 points
Insulation method		Relay insulation
Rated input voltage / current		DC 24V 2A (resistive load) / AC 220V 2A (COS ψ = 1), 5A /COM
Min. load voltage / current		DC5V 1mA
Max. load voltage		AC 250V, DC 125V
Off leakage current		0.1mA (AC 220V, 60Hz)
Max. on / off frequency		3,600 times / hr
Surge absorber		None
Service life	Mechanical	20million times or more
	Electrical	Rated load voltage / current 100,000 times or more
		AC 200V / 1.5A, AC 240V / 1A (COS ψ = 0.7) 100,000 times or more AC 200V / 1A, AC 240V / 0.5 (COS ψ = 0.35) 100,000 tiems or more DC 24V / 1A, DC 100V / 0.1A (L / R = 7ms) 100,000 times or more
Response time	Off → On On → Off	10ms or less 12ms or less
COMMON method		8 points / 1COM
Internal current consumption		250mA
Operation indicator		Output On, LED On
External connection method		9-pin terminal block connector

Wiring (XBE-DR16A)

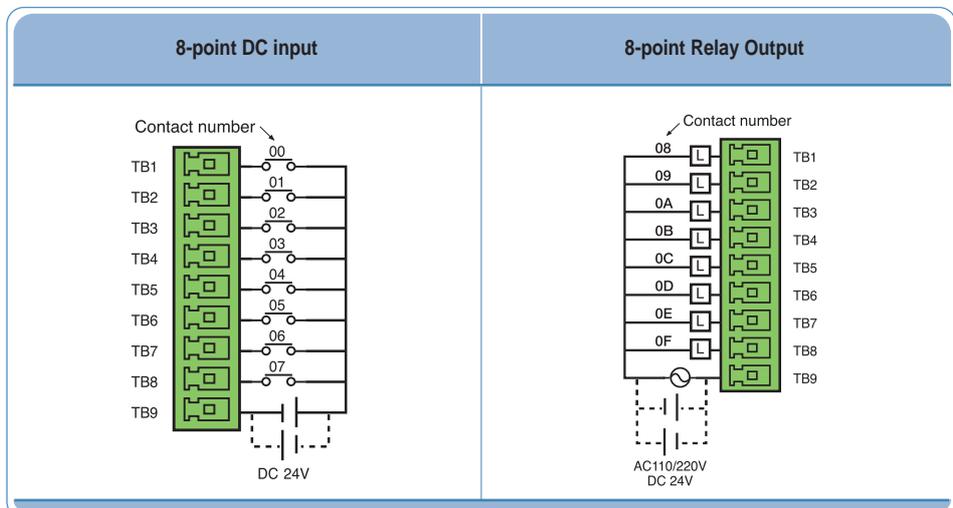

Specification

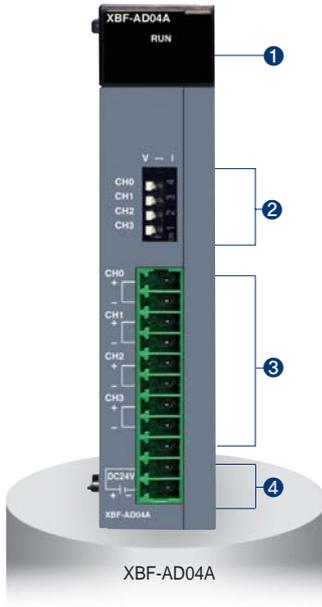


Item		XBF-AD04A		XBF-AD08A	
Analog range	Item	Voltage	Current	Voltage	Current
	Range	DC 0~10V (input resistance : 1MΩ min.)	DC 4~20mA, DC 0~20mA (input resistance:250Ω)	DC 1~5V DC 0~5V DC 0~10V (input resistance:250Ω)	DC 4~20mA, DC 0~20mA (input resistance:250Ω)
Digital Output	Type	12bit binary data			
	Range	Unsigned value	0~4000		
		Signed value	-2000~2000		
		Precise value	0~1000	4000~2000/ 0~2000	100~500(DC1~5V) 0~500(DC 0~5V) 0~1000(DC 0~10V)
Percentile value	0~1000				
Resolution		2.5mV(1/4000)	5μA(1/4000)	1.25mV (DC1~5V, 0~5v) 2.5mV(DC 0~10V)	5μA (DC 4~20mA, 0~20mA)
Max. conversion speed	1.5ms / channel				
Max. absolute input		±15V	±25mA	±15V	±25mA
Analog Input Channels	4 channel/module		8 channel/module		
Insulation method	Photocoupler insulation between I/O terminal and power supply				
Connection terminal	11-point terminal block				
Occupied I/O points	Fixed type : 64 points				
Current consumption	DC 5V	120mA		105mA	
	DC 24V	62mA		85mA	

Names and Functions


No.	Name	Descriptions
1	RUN LED	<ul style="list-style-type: none"> ▶ Indicates condition of module • LED On: Normal condition • LED On and Off: Error • LED Off: Power Off or module malfunction
2	Input selection S/W	<ul style="list-style-type: none"> ▶ Voltage / Current selection switch • V: Voltage input selection • I: Current input selection
3	Terminal block	▶ External device connection
4	External power supply terminal	▶ External DC 24V input

Wiring

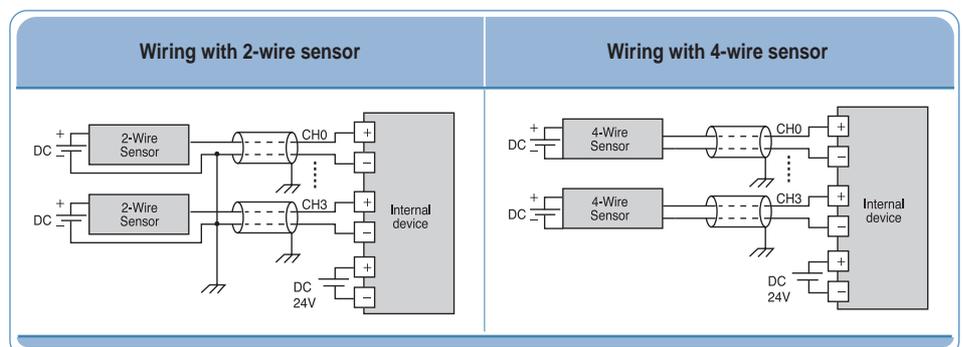

※ Use 22AWG, 2 conductor, twist shielded cable when wiring between analog module and external device.

Specification

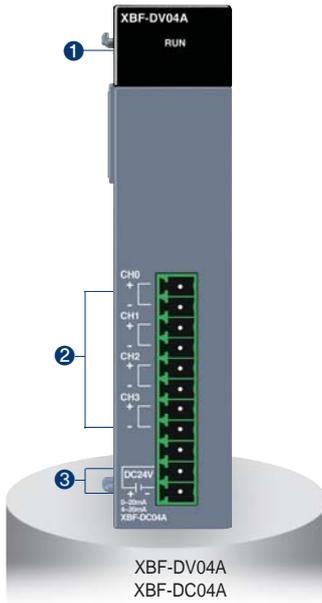


Item	XBF-DV04A	XBF-DC04A
Analog range	DC 0 ~ 10 V (Load resistance $\geq 2k\Omega$)	4 ~ 20mA / 0 ~ 20mA (Load resistance $\leq 510\Omega$)
Analog range Selection	-	XG 5000 I/O parameter
Digital data	Output range	0 ~ 10 V
	Unsigned value	0 ~ 4000
	Signed value	- 2000 ~ 2000
	Precise value	0 ~ 1000
	Percentile value	0 ~ 1000
Data format	Data format of digital input is set by user program or I/O parameter (Setting for each channel is available.)	
Resolution	Resolution (1 / 4000)	
	2.5mV	5 μ A
Max. conversion speed	1ms / channel	
Max. absolute output	$\pm 15V$	$\pm 25mA$
Accuracy	$\pm 0.5\%$ or less	
Analog output channels	4 channel / module	
Insulation method	Photocoupler insulation between I/O terminal and power supply	
Connection terminal	11-point terminal block	
Occupied I/O points	Fixed type: 64 points	
Current consumption	DC 5V	110mA
	DC 24V	70mA


Names and Functions

No.	Name	Descriptions
1	RUN LED	<ul style="list-style-type: none"> ▶ Indicates condition of module • LED On: Normal condition • LED On and Off: Error • LED Off: Power Off or module malfunction
2	Terminal block	▶ External device connection
3	External power supply terminal	▶ External DC 24V input

Wiring

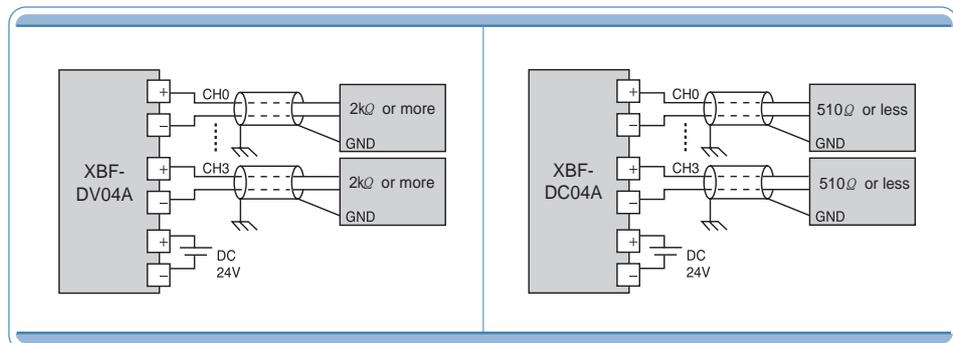

Specification

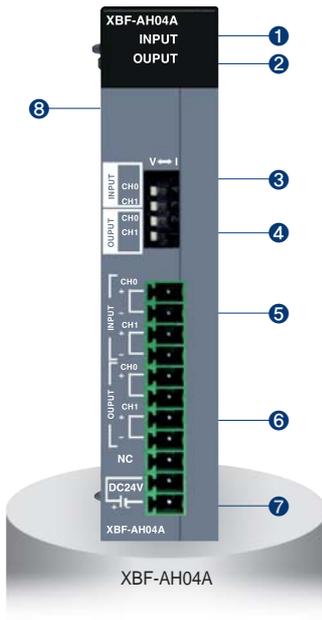


Item	XBF-AH04A	
	Input	Output
Analog channel	2 channels	2 channels
Analog range	DC 1 ~ 5V, DC 0 ~ 5V, DC 0 ~ 10V (Input resistance: 1 M Ω min.) DC 4 ~ 20mA, DC 0 ~ 20mA (Input resistance 250 Ω)	DC 1 ~ 5V, DC 0 ~ 5V, DC 0 ~ 10V (Load resistance \geq 2k Ω) DC 4 ~ 20mA, DC 0 ~ 20mA (Load resistance \leq 510 Ω)
Analog range Selection	XG 5000 I/O parameter and External switch	
Digital data	Unsigned value	0 ~ 4000
	Signed value	-2000 ~ 2000
	Precise value	100 ~ 500 (DC 1 ~ 5V), 0 ~ 500 (DC 0 ~ 5V), 0 ~ 1000 (DC 0 ~ 10V) 400 ~ 2000 (DC 4 ~ 20mA), 0 ~ 2000 (DC 0 ~ 20mA)
	Percentile value	0 ~ 1000
Resolution(1/4000)	1.25mV (DC 1~5V, 0~5V), 2.5mV (DC 0~10V) 5 μ A (DC4~20mA, 0~20mA)	
Max. conversion speed	\pm 15V, 25mA	
Max. absolute output	1ms / channel	
Accuracy	\pm 0.5% or less	
Insulation method	Photocoupler insulation between I/O terminal and power supply	
Connection terminal	11-point terminal block	
Occupied I/O points	Fixed type: 64 points	
Current consumption	DC 5V	120mA
	DC 24V	130mA

Names and Functions


No.	Name	Descriptions
1	INPUT LED	<ul style="list-style-type: none"> Indicates input condition of module LED On: Normal condition LED On and Off: Error LED Off: Power Off or module malfunction
2	OUTPUT LED	<ul style="list-style-type: none"> Indicates output condition of module LED On: Normal condition LED On and Off: Error LED Off: Power Off or module malfunction
3	Input selection S/W	▶ Voltage / Current selection switch for input
4	Output selection S/W	▶ Voltage / Current selection switch for output
5	Terminal block	▶ Terminal for external input device
6		▶ Terminal for external output device
7	External power supply terminal	▶ Terminal for external DC 24V input
8	Expansion connector	▶ Terminal for expansion

Wiring

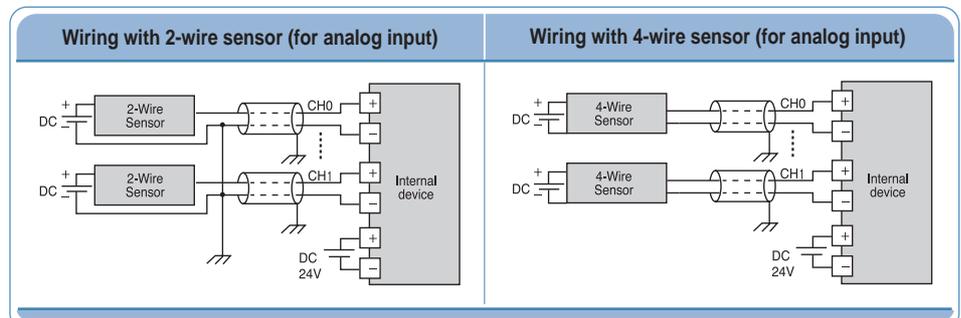

*Use 22AWG, 2 conductor, twist shielded cable when wiring between analog module and external device.

Specification

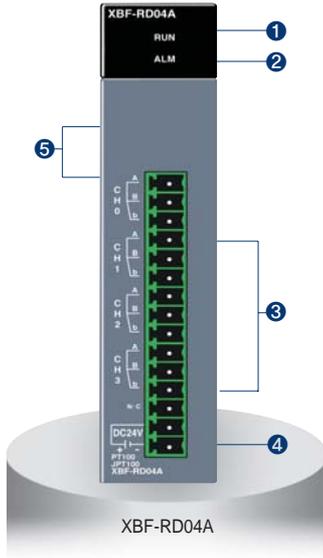


Item	XBF-RD04A	
Number of channels	4	
Sensor Type	PT 100	JIS C1804-1997
	JPT 100	JIS C1604-1981, KS C1603-1991
Temperature range	PT 100	- 200 ~ 600°C
	JPT 100	- 200 ~ 600°C
Digital output	PT 100	- 2000 ~ 6000
	JPT 100	- 2000 ~ 6000
	Scaling	0 ~ 4000
Accuracy	25°C	±0.3% or less
	0 ~ 55°C	±0.5% or less
Conversion speed	40ms / Ch	
Wiring method	3Wire	
Current consumption	DC 5V	100mA
	DC 24V	100mA


Names and Functions

No.	Name	Descriptions
①	RUN LED	<ul style="list-style-type: none"> ▶ Displays the hardware operation status (Fatal fault) <ul style="list-style-type: none"> • On: Normal status • Flickering: Error (0.2s flickering) • Off: hardware error or power off
②	ALM LED	<ul style="list-style-type: none"> ▶ Displays the status of the channels (Light fault) <ul style="list-style-type: none"> • Flickering: Line disconnection (1s flickering) • Off: Normal status
③	Terminal block	▶ 3-wire RTD sensors can be connected
④	External power terminal	▶ Supplies the external DC 24V
⑤	Expansion connector	▶ Connects the module with an expansion module

Wiring

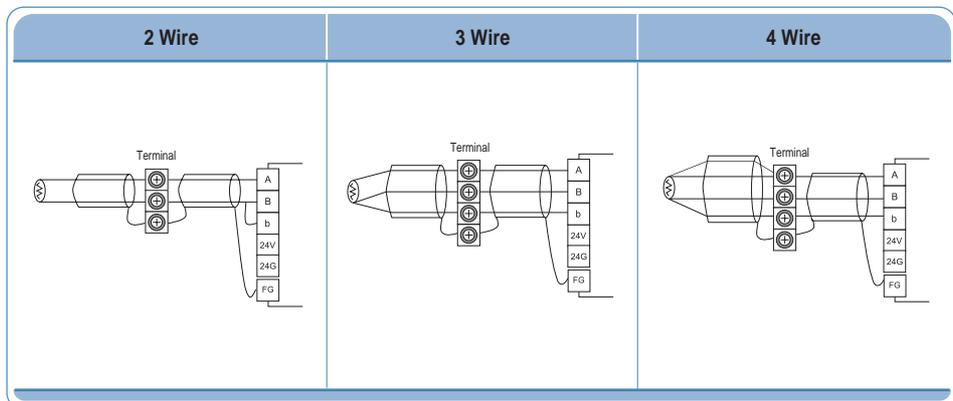

Specification

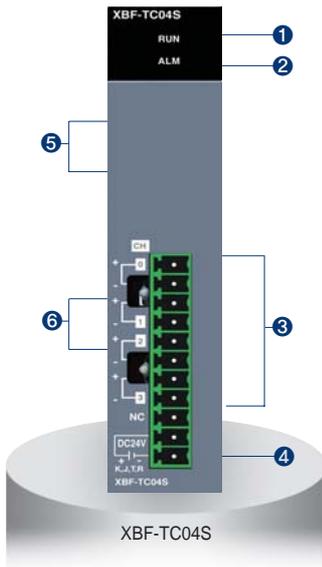


Item	XBF-TC04S	
Number of channels	4	
Input sensor type	Thermocouple K / J / T / R JIS C1602-4995	
Temperature Input range	K	- 200.0°C ~ 1300.0°C (-328.0°F ~ 2372.0°F)
	J	- 200.0°C ~ 1200.0°C (-328.0°F ~ 2192.0°F)
	T	- 200.0°C ~ 400.0°C (-328.0°F ~ 752.0°F)
	R	0.0°C ~ 1700.0°C (32.0°F ~ 3092.0°F)
Digital output	Temperature display unit	Display down to one decimal place K, J, T: 0.1°C R: 0.5°C
	Scaling display (Defined by user)	Unsigned scaling (0 ~ 65535) Signed scaling (-32768 ~ 32767)
Accuracy	Normal temperature (25°C)	±0.2%
	Temperature coefficient (0 ~ 55°C)	±100 ppm / °C
Max. conversion speed	50ms / Channel	
Warming-up time	15 minutes or more	
Terminal	11-point terminal	
I/O points occupied	64 points	
Current consumption	DC 5V	100mA
	DC 24V	100mA


Names and Functions

No.	Name	Descriptions
1	RUN LED	<ul style="list-style-type: none"> ▶ Displays the hardware operation status (Fatal fault) • On: Normal status • Flickering: Error (0.2s flickering) • Off: hardware error or power off
2	ALM LED	<ul style="list-style-type: none"> ▶ Displays the status of the channels (Light fault) • Flickering: Line disconnection (1s flickering) • Off: Normal status
3	Terminal block	▶ Terminals to connect the thermo-couple sensor
4	External power terminal	▶ Terminals to supply the external DC 24V
5	Expansion connector	▶ Terminal to connect the expansion modules
6	RJC	▶ Device for reference junction compensation

Wiring

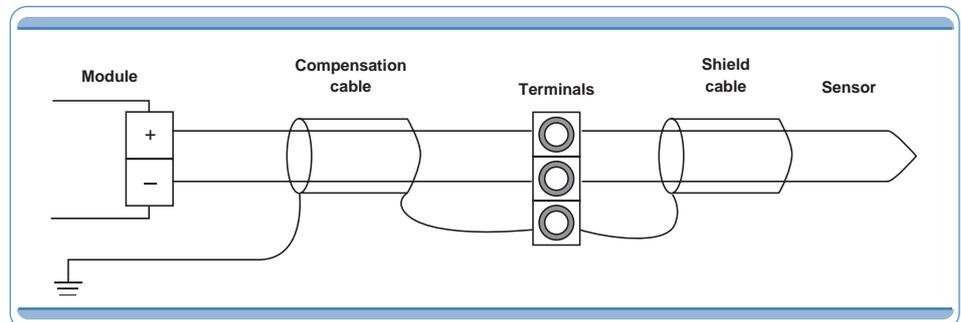

Specification

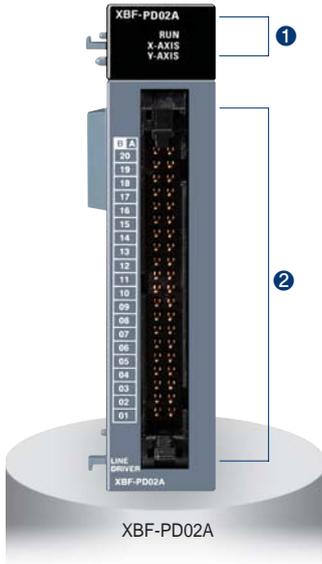


Item		XBF-PD02A
NO. of control axis		2 axis
Pulse output type		Line drive
Max. pulse output		2Mpps
Max. connection length		10m
Control mode		Position control, Speed control, Speed / Position switching control, Position / Speed switching control
Interpolation		linear interpolation, Circula interpolation
Positioning data		150 operation data for each axis
Configuration tool		Built-in function parameter of XG5000
Back-up		Flash memory
Positioning	Positioning method	Absolute / incremental method
	Unit	pulse
	Positioning range	- 2,147,483,648 ~ 2,147,483,648
	Speed range	1 ~ 2,000,000 (pulse/Sec)
	Acceleration/Deceleration type	Trapezoidal acceleration / deceleration
Acceleration/Deceleration time		0 ~ 65,535ms, Asymmetric acceleration / deceleration
Max. encoder input		200kpps(Line drive)
Error/Operation		LED
Occupied / O points (XBC)		Fixed type: 64points
Connection terminal		40pin connector
Current consumption		500mA

Names and Functions

No.	Name	Descriptions
1	RUN LED	1. RUN ▶ Displays the hardware operation status • On: Normal status • Off: Abnormal status 2. X_AXIS, Y_AXIS • On: Operation • Flickering: Error
2	Terminal block	▶ Terminals to connect the MPG, external device and drive device.

Terminal

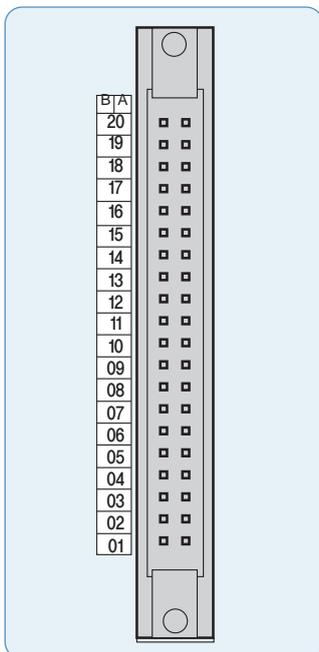

Pin number		Signal name	
X axis	Y axis		
	B20	MPG A+	MPG/Encoder A+ input
	A20	MPG A-	MPG/Encoder A- input
	B19	MPG B+	MPG/Encoder B+ input
	A19	MPG B-	MPG/Encoder B- input
A18	B18	FP+	Forward pulse+
A17	B17	FP-	Forward pulse-
A16	B16	RP+	Reverse pulse+
A15	B15	RP-	Reverse pulse-
A14	B14	OV+	High limit
A13	B13	OV-	Low limit
A12	B12	DOG	Near point
A11	B11	NC	-
A10	B10	NC	-
A09	B09	COM	Common
A08	B08	NC	-
A07	B07	INP	Inposition signal
A06	B06	INP COM	Inposition signal common
A05	B05	CLR	Deviation counter clear signal
A04	B04	CLR COM	Deviation counter clear signal common
A03	B03	HOME +5V	Zero signal(DC5V)
A02	B02	HOME COM	Zero signal Common
A01	B01	NC	-

Specification




Item		Specification	
		XBF-H002A	XGF-H002A
Count Input signal	Signal	A-phase, B-phase	
	Input type	Voltage input (Open Collector)	Differential input (Line Drive):
	Signal level	DC 5/12/24V	RS-422A Line Drive/HTL LEVEL Line Drive
Maximum coefficient speed		200kpps	500kpps (HTL input : 250kpps)
Number of channels		2 Channels	
Coefficient range		Signed 32-bit (-2,147,483,648 ~ 2,147,483,647)	
Count mode		Linear Count (When 32-bit range exceeded, Carry/Borrow occurs, the count value stopped)	
		Ring Count (repeated count within setting range)	
Input pulse mode		1-phase input	
		2-phase input	
		CW/CCW input	
Up/down Setting	1-phase input	Increasing/decreasing operation setting by B-phase input	
	2-phase input	Increasing/decreasing operation setting by program	
	CW/CCW	Automatic setting by difference in phase	
Multiplication function	1-phase input	A-phase input: increasing operation	
	2-phase input	B-phase input: decreasing operation	
	CW/CCW	1/2 multiplication	
Control input	1-phase input	1/2 multiplication	
	2-phase input	1/2/4 multiplication	
	CW/CCW	1-multiplication	
External output	Signal	Preset instruction input, auxiliary mode instruction input	
	Signal level	DC 5V/12V/24V (by terminal selection) input type	
	Signal type	Voltage	
Operation Status Display	Output points	2-point/channel (for each channel): terminal output available	
	Type	Select single-compared (>, >=, =, =<, <) or section compared output (included or excluded)	
	Output type	Open collector output (Sink)	
Count Enable	Input Signal	A-phase input, B-phase input, Preset instruction input, auxiliary mode instruction input	
	Output Signal	External output 0, External output 1	
	Busy Status	Module Ready	
Preset function		To be set through program (count available only in enable status)	
auxiliary mode function		To be set through terminal or program	
Terminal		Count clear, Count latch, Section count(time setting value: 0~6000ms), Measurement of input frequency(for respective input phase), Measurement of counts per hour(time setting value: 0~6000ms) Count prohibited function	
I/O occupied points		40 pin connector	
Internal consumed current		200 mA	260 mA
Weight		90g	

Names and Functions


No.	Name	Descriptions
①	Run LED (ØA, ØB, P, G, O0, O1)	<ul style="list-style-type: none"> ▶ On: relevant channel pulse inputting, Preset/Auxiliary function signal inputting, Comparison outputting ▶ Off: No input of relevant channel pulse, No input of preset/auxiliary function signal, No output of comparison
	Ready signal (RDY)	<ul style="list-style-type: none"> ▶ On: HSC module normal ▶ Off: Power off or CPU module reset, HSC module error • Flicker: HSC module error
②	External wiring connector	Connector to connect with external I/O

Terminal (XBF-H002A)

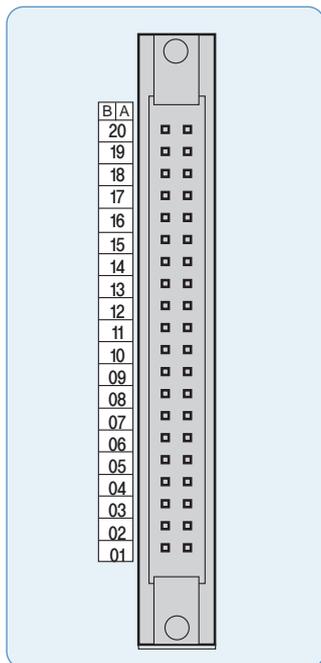


Pin arrangement		Signal name	
B CH1	A CH0		
20	20	A24V	A phase pulse input 24V
19	19	A12V	A phase pulse input 12V
18	18	A5V	A phase pulse input 5V
17	17	ACOM	A phase pulse input COM
16	16	B24V	B phase pulse input 24V
15	15	B12V	B phase pulse input 12V
14	14	B5V	B phase pulse input 5V
13	13	BCOM	B phase pulse input COM
12	12	P24V	Preset input 24V
11	11	P12V	Preset input 12V
10	10	P5V	Preset input 5V
09	09	PCOM	Preset input COM
08	08	G24V	Auxiliary function input 24V
07	07	G12V	Auxiliary function input 12V
06	06	G5V	Auxiliary function input 5V
05	05	GCOM	Auxiliary function input COM
04	04	OUT0	Comp. output 0
03	03	OUT1	Comp. output 1
02	02	24V	External power input 24V
01	01	24G	External power input GND

Terminal (XBF-HD02A)

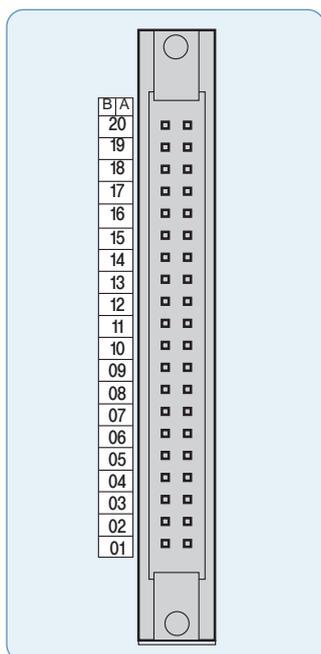

Pin arrangement		Signal name	
B CH1	A CH0		
20	20	A I +	A I phase differentiation input +
19	19	A I -	A I phase differentiation input -
18	18	A II +	A II phase differentiation input +
17	17	A II -	A II phase differentiation input -
16	16	B I +	B I phase differentiation input +
15	15	B I -	B I phase differentiation input -
14	14	B II +	B II phase differentiation input +
13	13	B II -	B II phase differentiation input -
12	12	P24V	Preset input 24V
11	11	P12V	Preset input 12V
10	10	P5V	Preset input 5V
09	09	PCOM	Preset input COM
08	08	G24V	Auxiliary function input 24V
07	07	G12V	Auxiliary function input 12V
06	06	G5V	Auxiliary function input 5V
05	05	GCOM	Auxiliary function input COM
04	04	OUT0	Comp. output 0
03	03	OUT1	Comp. output 1
02	02	24V	External power input 24V
01	01	24G	External power input GND

Ethernet (XBL-EMTA)

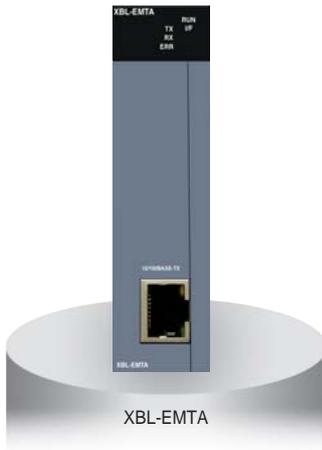

Item	XBL-EMTA	
Communication spec.	10 / 100 Base-TX	
Protocol	TCP / IP, UDP / IP	
Service	With LS PLCs	High-speed link, P2P service
	With other devices	P2P service
	Application	Dedicated protocol service, XG5000 service
HS link sending / receiving data	200words / block (Max. 64blocks)	
No. of channel connectable to upper stage	6 channels	
Service	Communication with PC (HMI) and external devices, High-speed communication among LSIS PLCs	
Media	UTP / STP Category 5	
Current consumption	300mA	

RS-232C, RS-422 / 485



Item	Built-in RS-232C	XBL-C21A	Built-in RS-485	XBL-C41A
Interface	RS-232C 1Ch	RS-232C 1Ch	RS-485 1Ch	RS-422 / 485 1Ch
MODEM Function	Remote communication via the external MODEM (XBL-C21A Only)			
Mode	Dedicate	1:1 or 1:N via the dedicated protocol		
	XG5000 mode	Program download, upload and control via the remote control		
	P2P	Communication defined by the protocol using XG-PD XGT / Modbus master		
Operation Mode	Server (slave)	XGT / Modbus Server, User-defined communication		
	Client (master)	XGT / Modbus P2P Master, User-defined communication		
Data format	Start Bit	1		
	Data Bit	7 or 8		
	Stop Bit	1 or 2		
	Parity	Even / Odd / None		
	Setting	Setting by XG-PD parameter		
Synchronous	Asynchronous			
Speed (bps)	1,200 / 2,400 / 4,800 / 9,600 / 19,200 / 38,400 / 57,600 / 115,200 bps			
Station number	Setting by XG-PD, Max. 32 stations			
Distance	RS-232C: Max.15m (Expansion by MODEM), RS-422/485: Max 500m			
MODEM communication	-	Support	-	-
Network	1: 1		1: N	
Diagnostic	Via LED and XG-PD			
Max. expansion	Built-in	2 stages	Built-in	2 stages

RAPiNet (XBL-EIMT)



Item		XBL- EIMT
Transmission standard	Transmission speed	100Mbps
	Transmission method	Base band
	Max. extension distance between nodes	100m
	Max. number of nobes	64
	Max. protocol size	1,516 bytes
	Access method to service zone	CSMA / CD
	Frame error check	$CRC\ 32 = X^{32} + X^{26} + X^{23} + \dots + X^2 + X + 1$
Basic standard	Normal communication guarantee	Max. 1,200 (packet/sec)
	Dimension (mm)	90(H) x 27(W) x 60(D)
	Consumption current	290
	Weight (g)	102

Ethernet/IP (XBL-EIPT)



Item		XBL- EIPT
Transmission standard	Transmission speed	100Mbps
	Transmission method	Base band
	Max. extension distance between nodes	100m
	Access method to service zone	CSMA / CD
	Frame error check	$CRC\ 32 = X^{32} + X^{26} + X^{23} + \dots + X^2 + X + 1$
Topology		Line, Star
The number of connections (Client / Server)	TCP	16 / 32
	CIP (IO communication)	32 / 64
Number of maxlimum services (P2P)		2
Number of maxlimum Installations		2
Max. setting data size per block	Periodic client	500 bytes
	Aperiodic client	512 bytes
Basic standerd	Dimension (mm)	90(H) x 27(W) x 60(D)
	aConsumption current	290
	Weight (g)	102

CANopen Module (XBL-CMEA, XBL-CSEA)



Item	XBL-CMEA	XBL-CSEA
Transmission Speed	10, 20, 50, 100, 125, 250, 500, 800, 1000Kbps	
Num. of port	1	
Max. node	32	-
PDO	TPDO	64
	RPDO	64
Total	Total 32	
Max. size of data per PDO	8Byte	
PDO transfer type	Synchronous acyclic(0), synchronous cyclic(1~240), RTR(252~253), time-event trigger(254~255)	
Support SDO	Client 127/Server 1	Server 1
SDO transfer type	Expedited, Normal	
Access method	CSMA/BA(Carrier Sense Multiple Access/Bitwise Arbitration)	
Topology	BUS	
SYNC Service	Producer Cycle : 20~5000ms	Consumer
NMT Node Control	NMT master	NMT slave
Emergency	Save the last five per Slave	Save up to last 10
NMT Error Control	Heartbeat, Life Guarding	Heartbeat
Network Scan	○	-
Size(mm)	90(H)X27(W)X60(D)	
Current consumption(mA)	211	202
Weight(g)	78	

Option modules




Option I/O modules

XBO-AD02A	Voltage/Current, Input 2 CHs
XBO-DA02A	Voltage/Current, Output 2 CHs
XBO-AH02A	Voltage/Current, Input 1 CH
	Voltage/Current, Output 1 CH
XBO-TC02A	TC(Thermocouple), Input 2 CHs

Option modules

XBO-M2MB	Memory
XBO-RTCA	RTC(Real Time Clock), Battery
XBO-DC04A	DC 24V, Input 4 points
XBO-TN04A	Transistor(Sink), Output 4 point
XBO-RD01A	RTD(Resistance Temperature Detect, Input 1CH)

Smart link

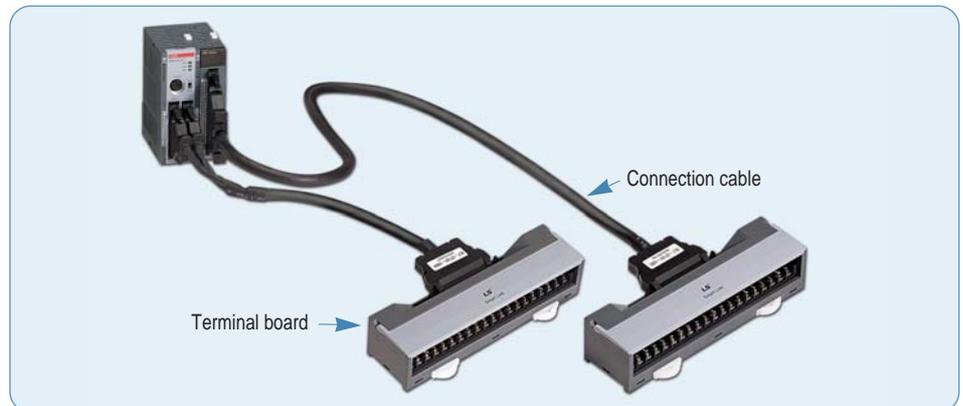


Terminal board	Connection cable	XBM-DN16S XBM-DN32S	XBE-DC32A	XBE-TN32A	XBE-TP32A	Cable length
TG7-1H40S (Terminal board)	R40H/20HH-05S-XBM3	●	-	-	-	0.5m
	R40H/20HH-10S-XBM3	●	-	-	-	1.0m
TG7-1H40CA (Terminal Board, Common)	C40HH-05SB-XBI	-	●	●	●	0.5m
	C40HH-10SB-XBI	-	●	●	●	1.0m
	C40HH-15SB-XBI	-	●	●	●	1.5m
	C40HH-20SB-XBI	-	●	●	●	2.0m
	C40HH-30SB-XBI	-	●	●	●	3.0m
R32C-NS5A-40P (Relay board: sink)	C40HH-05SB-XBI	-	-	●	-	0.5m
	C40HH-10SB-XBI	-	-	●	-	1.0m
	C40HH-15SB-XBI	-	-	●	-	1.5m
	C40HH-20SB-XBI	-	-	●	-	2.0m
R32C-PS5A-40P (Relay board:Source)	C40HH-05PH-XBP	-	-	-	●	0.5m
	C40HH-15PH-XBP	-	-	-	●	1.5m
	C40HH-20PH-XBP	-	-	-	●	2.0m

XG5000

(Programming software)


- Program editing & Engineering software
- Windows-based easy operation
- Multi-PLC, Multi-programming support
- Various monitoring and diagnosis functions
- Windows 2000, XP (Limited use in Windows 98, ME)

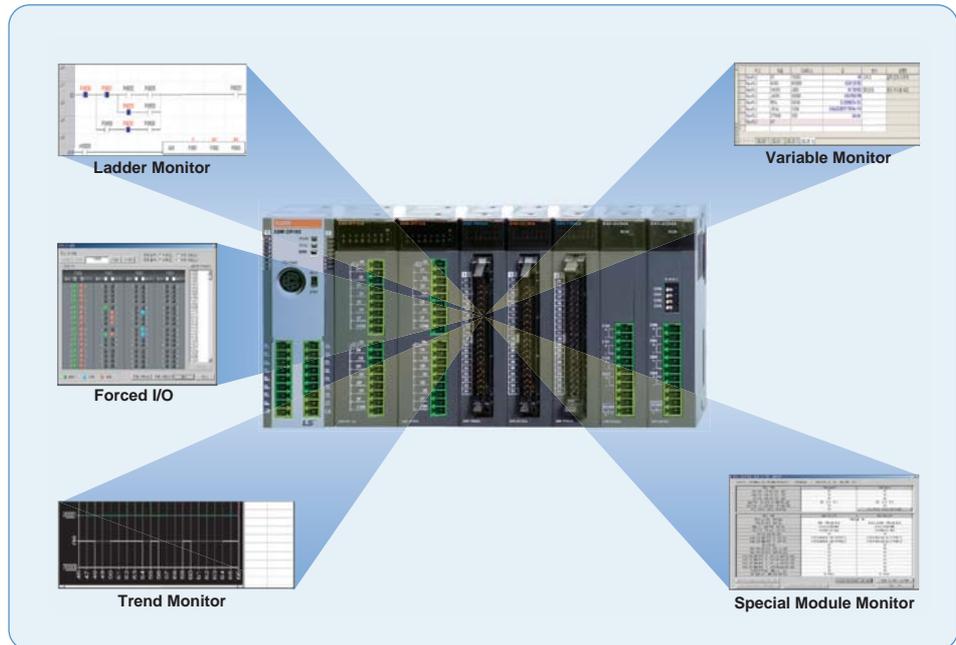

XG-PD

(Network setting software)

- Convenient network setting
- Extended monitoring function for network system and communication modules
- Fast interface with CPU by effective network management
- Various built-in diagnosis, functions
(CPU condition, Link condition, Service condition, Frame monitoring)

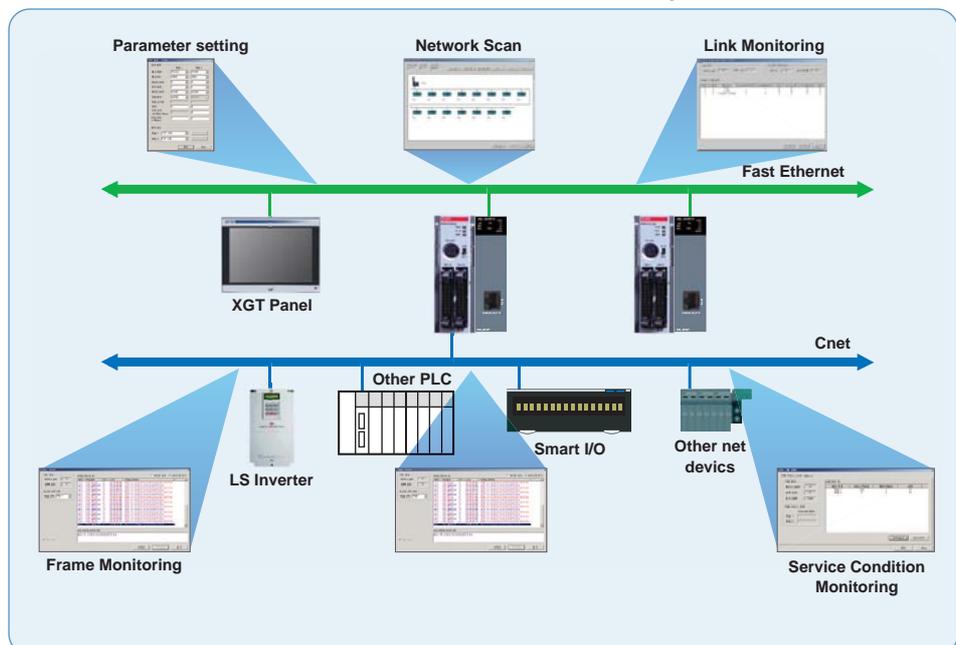

Product list

Product list

Item	Model	Specifications
Block type unit (Economic type)	XBC-DR10E	AC100~240V, 6-point DC input, 4-point Relay output
	XBC-DR14E	AC100~240V, 8-point DC input, 6-point Relay output
	XBC-DR20E	AC100~240V, 12-point DC input, 8-point Relay output
	XBC-DR30E	AC100~240V, 18-point DC input, 12-point Relay output
Block type unit (Standard type)	XBC-DR20SU	AC100~240V, 12-point DC input, 8-point Relay output
	XBC-DN20S(U)	AC100~240V, 12-point DC input, 8-point TR output
	XBC-DR30SU	AC100~240V, 18-point DC input, 12-point Relay output
	XBC-DN30S(U)	AC100~240V, 18-point DC input, 12-point TR output
	XBC-DN40SU	AC110/240V, 24-point DC input, 16-point TR output
	XBC-DR40SU	AC110/240V, 24-point DC input, 16-point Relay output
	XBC-DN60SU	AC110/240V, 36-point DC input, 24-point TR output
	XBC-DR60SU	AC110/240V, 36-point DC input, 24-point Relay output
	XEC-DN20SU	AC110/240V, 12-point DC input, 8-point TR output
	XEC-DR20SU	AC110/240V, 12-point DC input, 8-point Relay output
	XEC-DN30SU	AC110/240V, 18-point DC input, 12-point TR output
	XEC-DR30SU	AC110/240V, 18-point DC input, 12-point Relay output
	XEC-DN40SU	AC110/240V, 24-point DC input, 16-point TR output
	XEC-DR40SU	AC110/240V, 24-point DC input, 16-point Relay output
	XEC-DN60SU	AC110/240V, 36-point DC input, 24-point TR output
	XEC-DR60SU	AC110/240V, 36-point DC input, 24-point Relay output
Block type unit (High performance type)	XBC-DR32H	AC110~220V, 16-point DC input, 16-point Relay output
	XBC-DN32H	AC110~220V, 16-point DC input, 16-point TR output
	XBC-DR64H	AC110~220V, 32-point DC input, 32-point Relay output
	XBC-DN64H	AC110~220V, 32-point DC input, 32-point TR output
	XBC-DR32H/DC	DC24V, 16-point DC input, 16-point Relay output
	XBC-DN32H/DC	DC24V, 16-point DC input, 16-point TR output
	XBC-DR64H/DC	DC24V, 32-point DC input, 32-point Relay output
	XBC-DN64H/DC	DC24V, 32-point DC input, 32-point TR output
	XEC-DR32H	AC110~220V, 16-point DC input, 16-point Relay output
	XEC-DN32H	AC110~220V, 16-point DC input, 16-point TR output
	XEC-DR64H	AC110~220V, 32-point DC input, 32-point Relay output
	XEC-DN64H	AC110~220V, 32-point DC input, 32-point TR output
	XBC-DR32H/D1	DC12/24V, 16-point DC input, 16-point Relay output
	XBC-DR64H/D1	DC12/24V, 32-point DC input, 32-point Relay output
Modular type unit	XBM-DR16S	DC24V, 8-point DC24V input, 8-point relay output
	XBM-DN16S	DC24V, 8-point DC24V input, 8-point TR output
	XBM-DN32S	DC24V, 16-point DC24V input, 16-point TR output
Expansion I/O module	XBE-DC08A	8-point DC24V input
	XBE-DC16A	16-point DC24V input
	XBE-DC32A	32-point DC24V input

XGB Product list


Product list

Item	Model	Specifications
Expansion I/O module	XBE-RY08A	8-point relay output
	XBE-RY16A	16-point relay output
	XBE-TN08A	8-point Transistor (sink) output
	XBE-TN16A	16-point Transistor (sink) output
	XBE-TN32A	32-point Transistor (sink) output
	XBE-TP08A	8-point Transistor (source) output
	XBE-TP16A	16-point Transistor (source) output
	XBE-TP32A	32-point Transistor (source) output
	XBE-DR16A	8-point DC24V input, 8-point relay output
Special module	XBF-AD04A	4-channel analog input (current/voltage)
	XBF-AH04A	2-channel analog input (current/voltage)/2-channel analog output (current/voltage)
	XBF-DV04A	4-channel analog output (voltage)
	XBF-DC04A	4-channel analog output (current)
	XBF-RD04A	4-channel RTD input
	XBF-TC04S	4-channel Thermocouple input
	XBF-PD2A	Line drive 2axis
	XBF-AD08A	8-channel analog input(Current/voltage)
	XBF-HO02A	2-channel High-speed counter input(Open collector)
	XBF-HD02A	2-channel High-speed counter input(Line drive)
	Communication module	XBL-C41A
XBL-C21A		Cnet (RS-232C), 1Ch
XBL-EMTA		Fast Ethernet (100Mbps), 1Ch
XBL-EIMT		RAPIDnet, 2Ch
XBL-EIPT		Ethernet/IP, 2Ch
XBL-EIMF		RAPIDnet I/F, Max. 2Km(Fiber 2Ch.), 100Mbps
XBL-EIMH		RAPIDnet I/F(Twisted pair 1ch, Fiber 2Ch.), 100Mbps
XBL-CMEA		CANopen(10, 20, 50, 100, 125, 250, 500, 800, 1000Kbps, Num of PDO : 32)
XBL-CSEA		CANopen(10, 20, 50, 100, 125, 250, 500, 800, 1000Kbps, Num of PDO : 64)
Loader cable	PMC-310S	Connection cable (PC to PLC), 9pin(PC)-6pin(PLC)
	USB-301A	Connection cable (PC to PLC), USB
Memory module	XBO-M1024A	External memory for program back-up (1024Kbyte)
Option modules	XBO-AD02A	Voltage/Current, Input 2Ch
	XBO-DA02A	Voltage/Current, Output 2Ch
	XBO-AH02A	Voltage/Current, Input 1Ch / Voltage/Current, Output 1Ch
	XBO-TC02A	TC (Thermo couple), Input 2Ch
	XBO-M2MB	Memory
	XBO-RTCA	RTC (Real time clock), Battery
	XBO-DC04A	DC24V, Input 4 points
	XBO-TN04A	TR (Sink), Output 4 points
	XBO-RD01A	RTD (Resistance temperature detect), Input 1Ch

Product list

Terminal board	Connection cable	XBM-DN16S XBM-DN32S	XBE-DC32A	XBE-TN32A	XBE-TP32A	Cable length
TG7-1H40S (Terminal board)	R40H/20HH-05S-XBM3	●	-	-	-	0.5m
	R40H/20HH-10S-XBM3	●	-	-	-	1.0m
TG7-1H40CA (Terminal Board, Common)	C40HH-05SB-XBI	-	●	●	●	0.5m
	C40HH-10SB-XBI	-	●	●	●	1.0m
	C40HH-15SB-XBI	-	●	●	●	1.5m
	C40HH-20SB-XBI	-	●	●	●	2.0m
R32C-NS5A-40P (Relay board: sink)	C40HH-30SB-XBI	-	●	●	●	3.0m
	C40HH-05SB-XBI	-	-	●	-	0.5m
	C40HH-10SB-XBI	-	-	●	-	1.0m
	C40HH-15SB-XBI	-	-	●	-	1.5m
R32C-PS5A-40P (Relay board: Source)	C40HH-20SB-XBI	-	-	●	-	2.0m
	C40HH-30SB-XBI	-	-	●	-	3.0m
	C40HH-05PH-XBP	-	-	-	●	0.5m
	C40HH-15PH-XBP	-	-	-	●	1.5m
	C40HH-20PH-XBP	-	-	-	●	2.0m


Download cable diagram

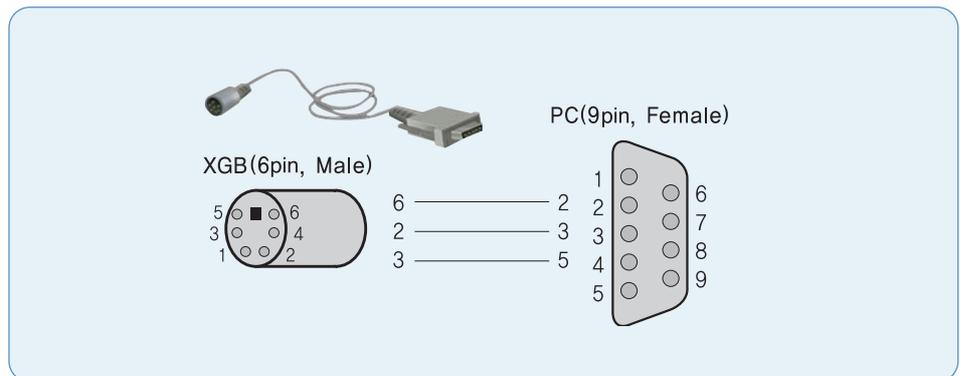


XGB Dimension

Block type unit


XBC/XEC-H type
(64points)

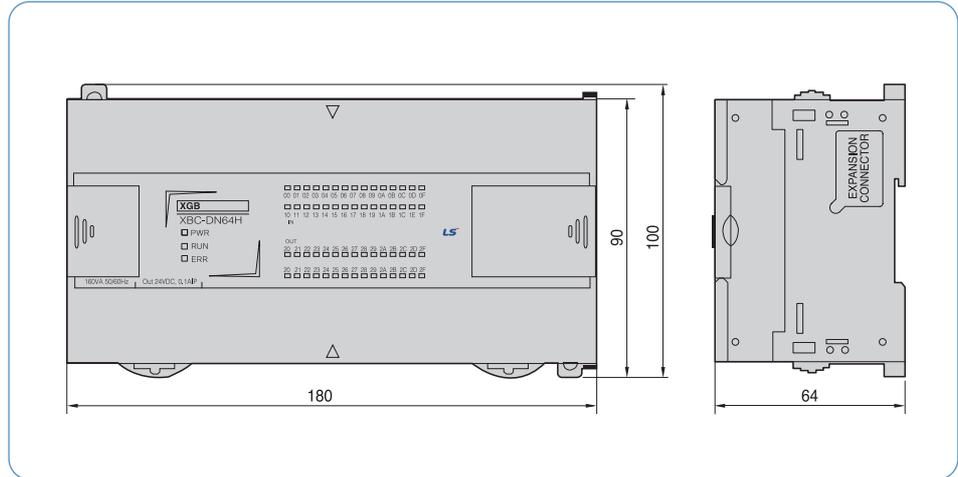


XBC/XEC-H type
(32points)

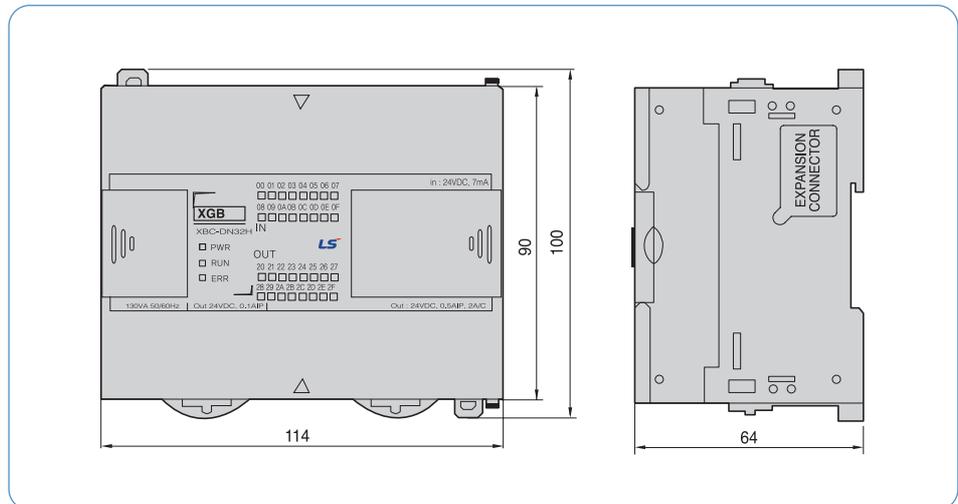


XBC-S type

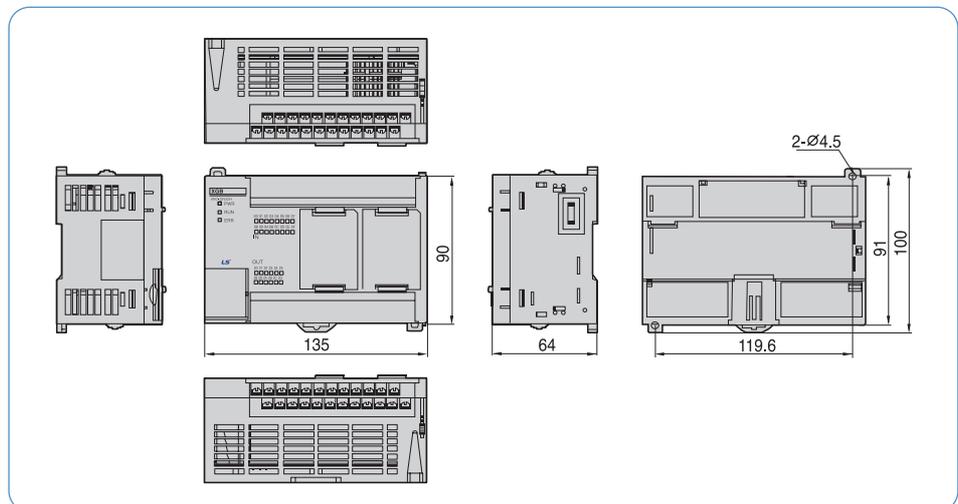

XBC-E type
(DR10E, DR14E)

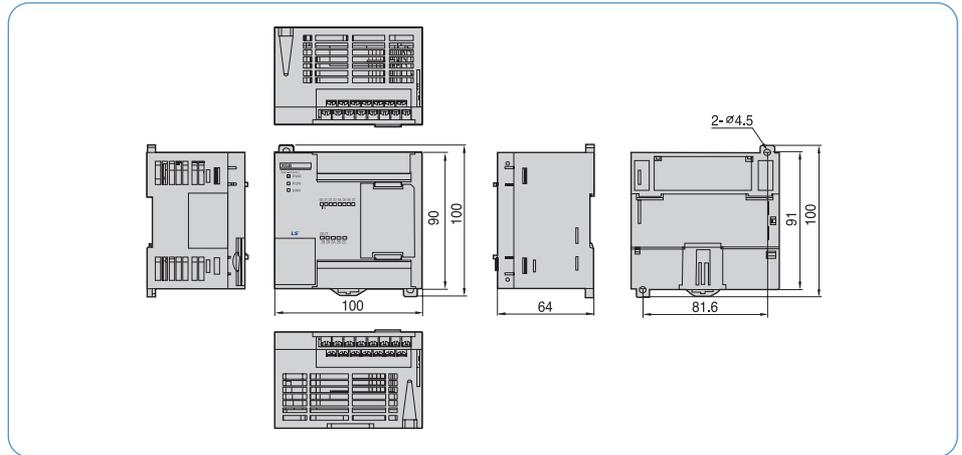


XBC-E type
(DR20E, DR30E)

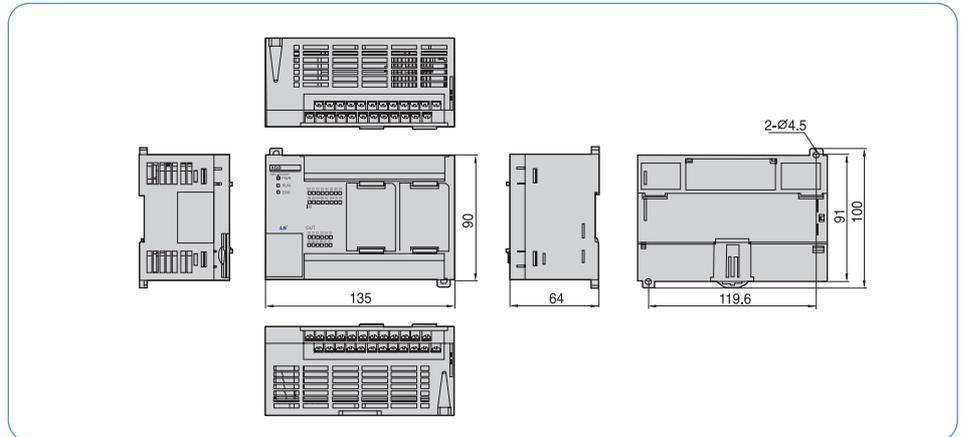

Modular type unit

XBM-S type

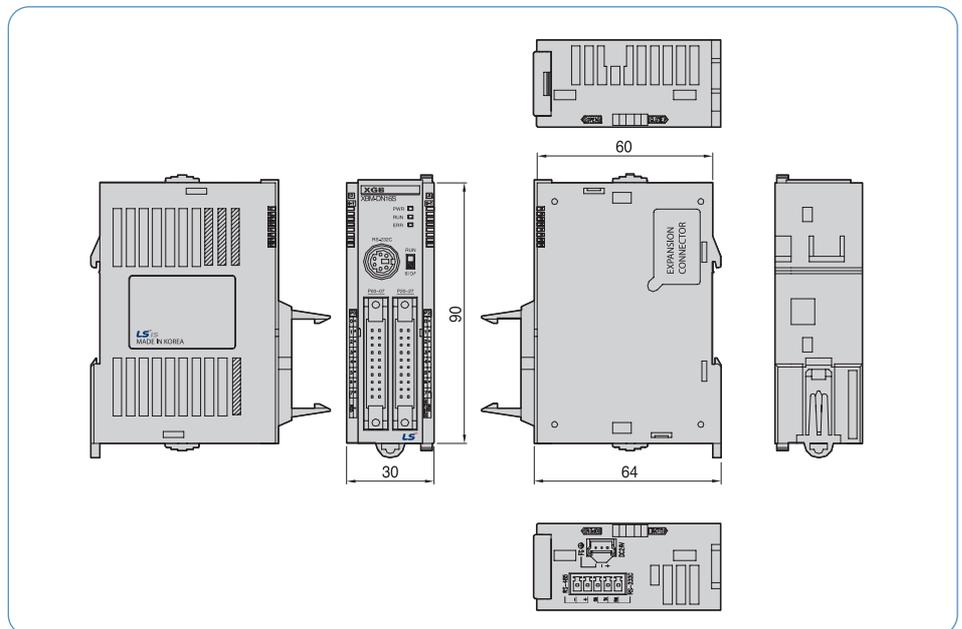

Worldwide Network

Head Office and Domestic Factories (Cheongju, Cheonan, Busan)

Dalian LSIS Co., Ltd.

LSIS Beijing R & D Center

LSIS Shanghai R & D Center

LSIS (Wuxi) Co., Ltd.

LS-VINA Industrial Systems Co., Ltd. Hanoi

LSIS (Europe) B.V., Netherlands

LSIS (Middle East) FZE

domestic

Head Office

LS Tower, 1026-6, Hogye-dong, Dongan-gu, Anyang-si,
Gyeonggi-do 431-848, Korea
Tel 82-2-2034-4870 _ Fax 82-2-3660-7021

Cheongju Factory

1 Songjeong-dong, Cheongju-si, Chungcheongbuk-do, 361-720, Korea
Tel 82-43-261-6114 _ Fax 82-43-261-6602

Cheonan Factory

181 Samseong-ri, Mokcheon-myeon, Cheonan-si, Chungcheongnam-do, 330-840, Korea
Tel 82-41-550-8114 _ Fax 82-41-566-8408

Janghang Factory

78 Jangam-ri, Janghang-eup, Seocheon-gun, Chungcheongnam-do, 325-904, Korea
Tel 82-41-955-3114 _ Fax 82-41-956-1020

Automation & Advanced Technology R&D Center

533 Hogye-dong, Dongan-gu, Anyang-si, Gyeonggi-do, 431-749, Korea
Tel 82-31-450-7114

Electrortechonology R&D Center

1 Songjeong-dong, Cheongju-si, Chungcheongbuk-do, 361-720, Korea
Tel 82-43-261-6114

Automation R&D Center

181 Samseong-ri, Mokcheon-myeon, Cheonan-si, Chungcheongnam-do, 330-840, Korea
Tel 82-41-550-8272

Power Testing & Technology Institute

1 Songjeong-dong, Cheongju-si, Chungcheongbuk-do, 361-720, Korea
Tel 82-43-261-6114

Cheongju Training Institute

1 Songjeong-dong, Cheongju-si, Chungcheongbuk-do, 361-720, Korea
Tel 82-43-268-2631

Cheongju Factory



Wuxi Factory (China)



Cheonan Factory



Dalian Factory (China)




Janghang Factory



Hanoi Factory (Vietnam)



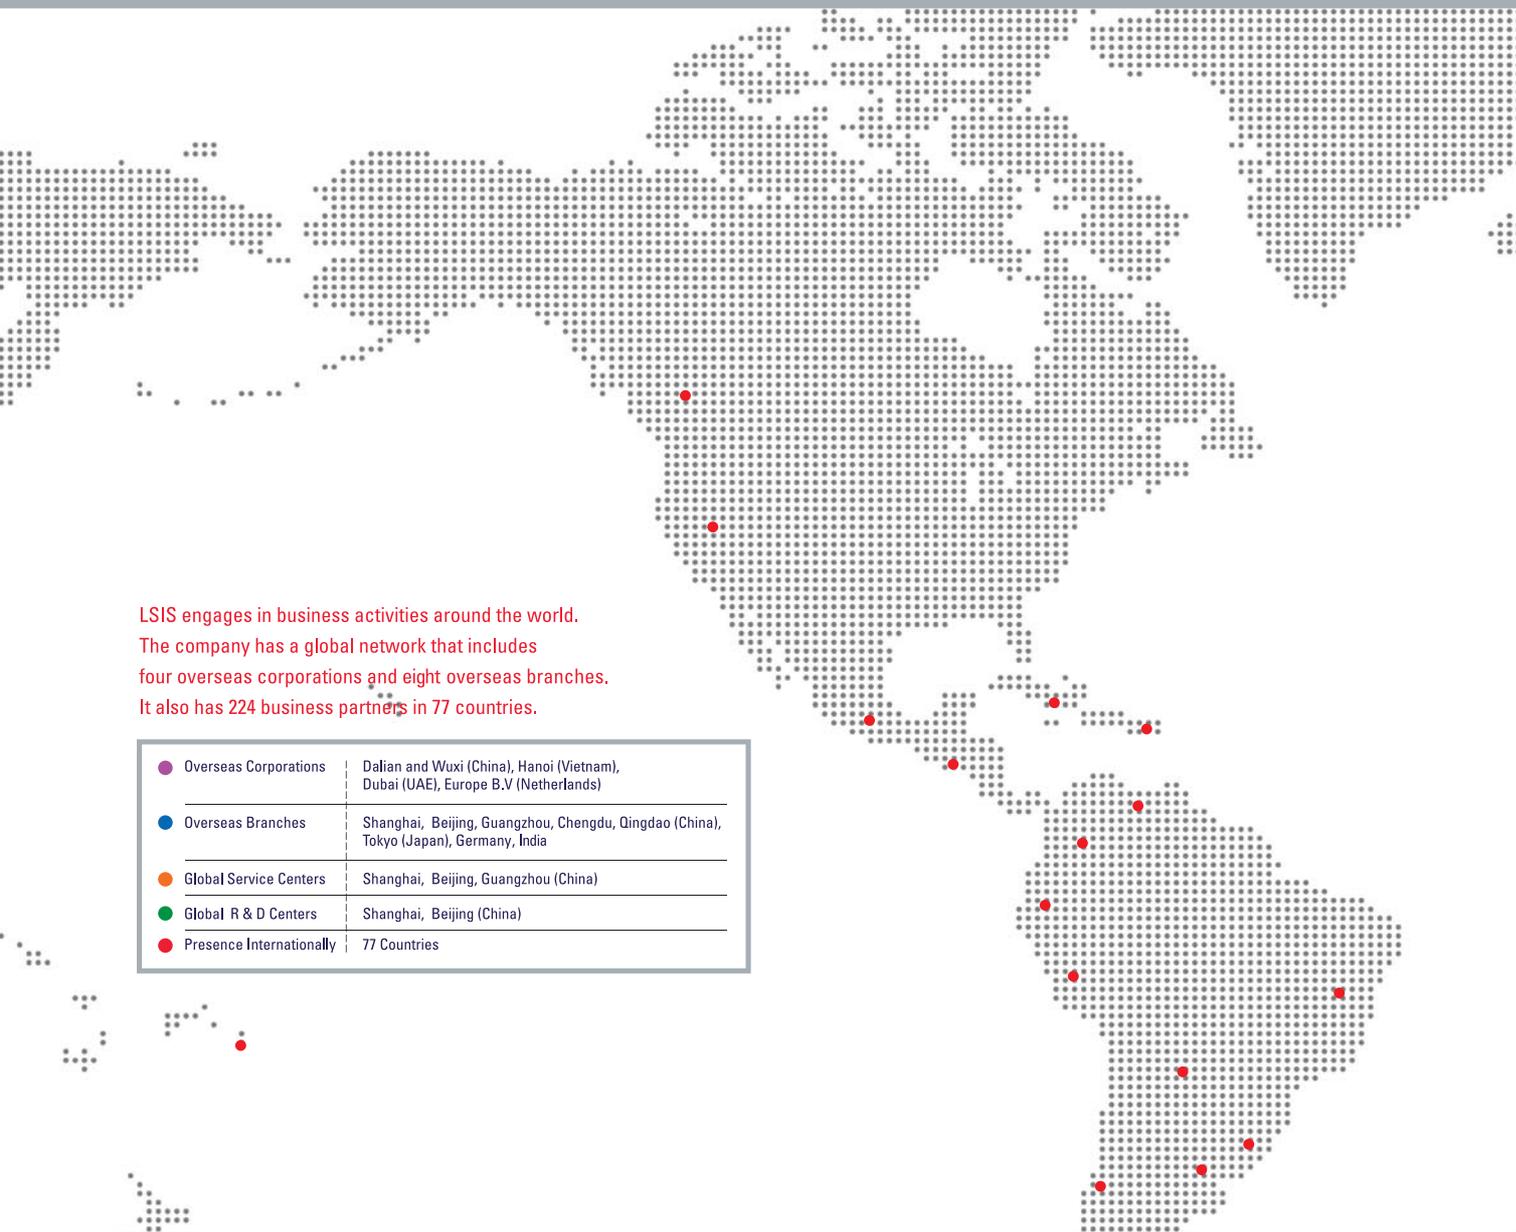

LSIS engages in business activities around the world. The company has a global network that includes four overseas corporations and eight overseas branches. It also has 224 business partners in 77 countries.

● Overseas Corporations	Dalian and Wuxi (China), Hanoi (Vietnam), Dubai (UAE), Europe B.V (Netherlands)
● Overseas Branches	Shanghai, Beijing, Guangzhou, Chengdu, Qingdao (China), Tokyo (Japan), Germany, India
● Global Service Centers	Shanghai, Beijing, Guangzhou (China)
● Global R & D Centers	Shanghai, Beijing (China)
● Presence Internationally	77 Countries

overseas

LS Industrial Systems (ME) FZE_Dubai, U.A.E.

Address: Jafza View Tower Lob 19, Room 205 Along Sheikh Zayed Road, Jebel Ali Free Zone Dubai, United Arab Emirates
Tel: 971-4-886-5360/Fax: 971-4-886-5361/e-mail: jungyongl@lsis.biz

Dalian LS Industrial System Co., Ltd._Dalian, China

Address: No. 15, Liaohexi 3-Road, Economic and Technical Development Zone, Dalian 116600, China
Tel: 86-411-273-7777/Fax: 86-411-8730-7560 / e-mail: cuibx@lsis.com.cn

Dalian LS Industrial Systems (Wuxi) Co., Ltd._Wuxi, China

Address: 102-A, National High & New Tech Industrial Development Area, Wuxi, Jiangsu, 214028, P. R. China
Tel: 86-510-8534-6666/Fax: 86-510-522-4078/e-mail: caidx@lsis.com.cn

LS-VINA Industrial Systems Co., Ltd._Hanoi, Vietnam

Address: Nguyen Khe, Dong Anh, Hanoi, Vietnam
Tel: 84-4-882-0222/Fax: 84-4-882-0220/e-mail: srjo@lsisvina.com

LS Industrial Systems Tokyo Office_Tokyo, Japan

Address: 16FL, Higashi-Kan, Akasaka Twin Tower 17-22, 2-chome, Akasaka, Monato-ku, Tokyo 107-8470, Japan
Tel: 81-3-3582-9128/Fax: 81-3-3582-2667/e-mail: jschuna@lsis.biz

LS Industrial Systems Shanghai Office_Shanghai, China

Address: Room E-G, 12FL, Hiamin Empire Plaza, No. 726, West Yan'an Road, Shanghai 200050, P.R. China
Tel: 86-21-5237-9977(609)/Fax: 89-21-5237-7189/e-mail: jinhk@lsis.com.cn

LS Industrial Systems Beijing Office_Beijing, China

Address: B-Tower 17FL, Beijing Global Trade Center B/D, No. 36, East BeisanHuan-Road, DongCheng-District, Beijing 100013, P.R. China
Tel: 86-10-5825-6027(666)/Fax: 86-10-5825-6028/e-mail: huangxd@lsis.com.cn

LS Industrial Systems Guangzhou Office_Guangzhou, China

Address: Room 1403, 14FL, New Poly Tower, No. 2, Zhongshan Liu Road, Guangzhou, P.R. China
Tel: 86-20-8328-6754/Fax: 86-20-8326-6287/e-mail: zhangch@lsis.com.cn

LS Industrial Systems Chengdu Office_Chengdu, China

Address: 12FL, Guodong Buiding, No.52, Jindun Road, Chengdu, 610041, P.R. China
Tel: 86-28-8612-9151(9226)/Fax: 86-28-8612-9236/e-mail: comysb@lsis.biz

LS Industrial Systems Qingdao Office_Qingdao, China

Address: YinHe Bldg., Room 402, No. 2P, Shandong Road, Qingdao-City, Shandong-province, 266071, P.R. China
Tel: 86-532-8501-6068/Fax: 86-532-8501-6057/e-mail: jinzx@lsis.com.cn

Green Innovators of Innovation



Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance. Do not disassemble or repair by yourself !
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.

LS IS Co., Ltd.

© 2006. LSIS Co., Ltd. All Rights Reserved.

■ HEAD OFFICE

LS-ro 127(Hogye-dong), Dongan-gu, Anyang-si,
Gyeonggi-do 431-848, Korea

- **NORTH AMERICA / WESTERN EUROPE**
+82-2-2034-4676 sukyong@lsis.biz (Brian Choi)
- **CIS / TURKEY / EASTERN EUROPE**
+82-2-2034-4879 dkimc@lsis.biz (Daniel Kim)
- **ASIA / OCEANIA / LATIN AMERICA**
+82-2-2034-4888 cshwang@lsis.biz (Charles Hwang)
- **MIDDLE EAST**
+971-4-886-5360 khchoi1@lsis.biz (Lambert Choi)

■ Global Network

- **LSIS (ME) FZE » Dubai, U.A.E.**
Address Jafza View Tower Lob 19, Room 205 Along Sheikh Zayed Road Jebel Aali Free Zone Dubai, United Arab Emirates.
Tel + 971-4-886-5360 Fax + 971-4-886-5361 E-mail jungyongl@lsis.biz
- **LSIS (Dalian) Co., Ltd » Dalian, China**
Address No. 15.Liaohexi 3-Road. Economic and Technical Development zone. Dalian 116600. China
Tel +86-411-8730-7510 Fax +86-411-8731-8277 E-mail cuibx@lsis.com.cn
- **LSIS (Wuxi) Co., Ltd » Wuxi, China**
Address 102-A. National High & New Tech Industrial Development Area. Wuxi. Jiangsu. 214028. P.R. China
Tel +86-510-8534-6666 Fax +86-510-8534-4078 E-mail caidx@lsis.com.cn
- **LS-VINA IS Co., Ltd » Hanoi, Vietnam**
Address Nguyen Khe Dong Anh, Hanoi
Tel +84-4-38820 222.3 Fax +84-4-38820 220 E-mail srjo@lsisvina.com, ylsuk@lsisvina.com
- **LSIS Tokyo Office » Tokyo, Japan**
Address 16FL. Higashi-Kan. Akasaka Twin Tower 2-17-22. Akasaka. Minato-ku Tokyo 107-0052. Japan
Tel +81-3-3582-9128 Fax +81-3-3582-2667 E-mail jschuna@lsis.biz
- **LSIS Shanghai Office » Shanghai, China**
Address Room E-G. 12FL Huamin Empire Plaza. No.726. West Yan'an Road Shanghai 200050. P.R. China
Tel +86-21-5237-9977(501) Fax +89-21-5237-7189 E-mail liyong@lsis.com.cn
- **LSIS Beijing Office » Beijing, China**
Address B-Tower 17FL. Beijing Global Trade Center. No. 36. East BeisanHuan-Road. DongCheng-District. Beijing 100013. P.R. China
Tel +86-10-5825-6027(666) Fax +86-10-5825-6028 E-mail xunmj@lsis.com.cn
- **LSIS Guangzhou Office » Guangzhou, China**
Address Room 1403.14FL. New Poly Tower. 2 Zhongshan Liu Road.Guangzhou.P.R China
Tel +86-20-8326-6754 Fax +86-20-8326-6287 E-mail chenxs@lsis.com.cn
- **LSIS Chengdu Office » Chengdu, China**
Address Room 1710.17FL. Huamin Empire Plaza. No.1 Fu Xing Street.Chengdu.610016. P.R. China
Tel +86-28-8670-3201 Fax +86-28-8670-3203 E-mail yangcf@lsis.com.cn
- **LSIS Qingdao Office » Qingdao, China**
Address Room 2001.YinHe Bldg. No. 29 Shandong Road, Qingdao. 266071, P.R. China
Tel +86-532-8501-6058 Fax +86-532-8501-6057 E-mail wangzy@lsis.com.cn

Specifications in this catalog are subject to change without notice due to continuous product development and improvement.