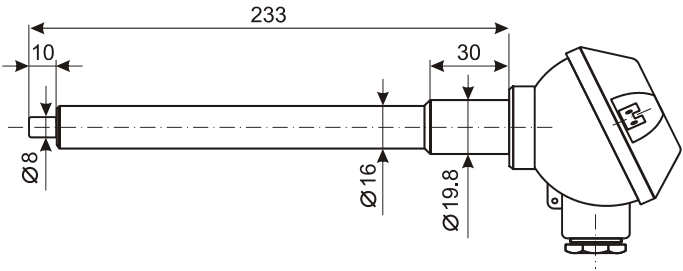


RTD PROBE FOR MEAT CUTTING MACHINES CC (TSCC)	SENSITIVE ELEMENT	TEMPERATURE RANGE	WIRES
Sheath - stainless steel (see Appendix - Sheath materials) Head - aluminum or stainless steel (see Appendix - Protection heads)	1 x Pt (RB,RD,RF,RG)	T9 -50...200 °C	2, 3, 4
	2 x Pt (RB,RD,RF,RG)	T9 -50...200 °C	2x2, 2x3*
	1 x Cu (RH, RK)	T9 -50...200 °C	2, 3, 4
	2 x Cu (RH)	T9 -50...200 °C	2x2, 2x3*
	<p><b>Protection head:</b> B, MA, MB, D, G, ES (see Appendix - Protection heads)</p> <p><b>Sheath material:</b> 1.4301 (M1), 1.4541 (M2), 1.4571 (M3), 1.4404 (M9)</p> <p><b>Filling:</b> silicone grease</p> <p><b>Accuracy class:</b> 'A', 'B', or '2xB' (see Appendix - RTD Tolerance)</p>		
* Please contact COMECO!			

**Ordering code** TSCC - G0.G1G2.G10.G11.G12 - #1

Code	Feature or option	Code values
G0	Protection head	B - type "B", MA - type "MA", MB - type "MB", D - type "D", G - IP65, type "G", ES - stainless-steel, type "ES"
G1	Number of RTD sensors	1 or 2
G2	Sensor	RB - Pt50, RD - Pt100, RF - Pt500, RG - Pt1000, RH - Cu50, RK - Cu100
G10	Sheath material	M1 - 1.4301, M2 - 1.4541, M3 - 1.4571, M9 - 1.4404
G11	Accuracy class <sup>(1)</sup>	A - 'A', B - 'B', C - '2xB'
G12	Number of wires	2, 3, 4 <sup>(2)</sup>
#1	Options	X - none, OP - electrochemically polished sheath surface

<sup>(1)</sup> Only for Pt sensors!

<sup>(2)</sup> Contact COMECO!